



we create
the light of
tomorrow

ARCHITECTURAL

climarlighting.com

CLIMAR LIGHTING

we **create** the light
of tomorrow

Climar Lighting has been manufacturing and supplying **reliable, efficient, high-quality lighting** since **1977**.

We are specialised in the **design** and **manufacturing** of **architectural, decorative** and **technical** lighting solutions developed to **address the needs** of specifiers, architects, wholesalers, contractors and end users, for a wide **range of applications**.

Supported by more than four decades of **production expertise**, combined with full certification to **ISO 9001:2015** Quality Management System, we are continually **evolving** to keep our place as a **market leading brand**, with a **relentless drive** to find the perfect balance between **Design, Quality, Service** and **Competitiveness**.

We are proud to boast an **obsessive eye for detail** and **quality of finishing**, combined with a pragmatic touch for **simplicity of installation**.

Although these are the **qualities** that differentiate us in the market, we believe that our **work is always growing** and able to be **improved and refined**.

Our path is guided by our **commitment** to this belief – ensuring the **continued evolution** of Climar Lighting for our clients and partners.

One step of this evolution is **WELEX** – the **Exterior Lighting Manufacturer Expert** of **Climar Group** – with a wide range of lighting solutions for outdoor applications.

This is our **philosophy**, our **passion**, our **commitment**.





ARCHITECTURAL LIGHTING

we **create** distinct
architectural lighting

Light plays an intrinsic role that contributes towards the **customisation** of the space. Through the idealised solution, **different applications** are developed which imbue architecture with a **distinctive prominence**.


Combined with the **aesthetic effect** and the **presence** of **Architectural Lighting**, the **accomplishment** of the intended **functions** is also expected, namely: **unique illumination** of an object, **emphasis** of **architectural lines**, **natural daylight** perception (Tunable White), **visual comfort** through Glare Control (UGR) or **differentiation** through Design.

Through the implemented solution, the same environment can easily acquire various **personalities** through different visual effects: **dramatic** by accentuating key details, **subtle** through the implementation of discreet lighting, **spot** lighting of specific objects, or **extensive** with the lighting of large open spaces, among other possible effects.




HIGHLIGHTS


BOYA



ASTRA



TUPOLI



VON



PROFILES



CARDAN





ERUS



ARES



SILVY



DOURO



BACO



ECLIPSE



ARCHITECTURAL GENERAL INDEX

SUSPENDED



BOYA 90
UP

034



BOYA 90
DOWN

036



BOYA 90
UP&DOWN

038



BOYA 90
IN

048



BOYA 90
BULBS IN

056



BOYA 90
BULBS OUT

058



ASTRA 90

066



ASTRA 90 LD/LI
Direct / Indirect

074



ASTRA 150

070



ASTRA 150 LD/LI
Direct / Indirect

078



TUPOLI 38

098



TUPOLI 55

102

SURFACE



BOYA 90

044



ASTRA 90

082



ASTRA 150

086



TUPOLI 38

100



TUPOLI-V 70

118

TRIMLESS



ASTRA 90

092



ASTRA 150

094

SUSPENDED



BOYA 140
OUT

052



BOYA 150
UP&DOWN

040



TUPOLI 70

106




TUPOLI 70
I-LIGHT
Invisible Light

110



TUPOLI-V 70

114



TUPOLI-360 70

120



TUPOLI-360 70
VERTICAL

124

FLOOR



BOYA 140

062

ARCHITECTURAL GENERAL INDEX

VON, A MODULAR CONCEPT



VON
Suspended

130



VON
Surface

130



VON
Recessed

130



VON
Trimless

130



VON C-LIGHT
Module
Direct Light

138



VON I-LIGHT
Module
Invisible Light

140

PROFILE SYSTEMS - SUSPENDED



DROP
Suspended
33x75mm

170



SNAP
33x79mm

174



SNAP LD/LI
Direct / Indirect
33x79mm

178



ALPHA Track
36x76mm

182



WELINE
56x89mm

210



WELINE LD/LI
Direct / Indirect
56x108mm

222

PROFILE SYSTEMS - SURFACE



SNAP
33x79mm

186




SNAP Mini
33x37mm

190



WELINE
56x89mm

226



OMEGA XS
86x96mm

264

PROFILE SYSTEMS - TRIMLESS




GAP
33x80mm

198



WELINE
55x89mm

244



WELINE Edge
55x87mm

248



OMEGA XS
85x96mm

276



VON V-LIGHT
Module
Sym / Asym Light
144




VON SPOT
Module
148



VON TUBE
Module
152



VON GLOBE
Module
156



VON GLOBE S
Module
160



VON
BLIND COVER
Module
164



OMEGA XS
86x96mm

256

PROFILE SYSTEMS - RECESSED



GAP
43x78mm

194



WELINE
72x89mm

238



OMEGA XS
101x96mm


270



OMEGA
120x95mm

282

PROFILE SYSTEMS - WALL



SNAP
33x37mm

204



SNAP LD/LI
Direct / Indirect
33x79mm

206



WELINE
56x89mm

250

ARCHITECTURAL GENERAL INDEX

CARDAN



CARDAN DUO
Suspended

288



CARDAN TETRA
Suspended

288



CARDAN SINGLE
Surface

292



CARDAN DUO
Surface

292



CARDAN SINGLE
Recessed

296



CARDAN DUO
Recessed

296

ERUS



ERUS 25
Suspended

302



ERUS 55
Suspended

306



ERUS 90
Suspended

312

ARES



ARES LI
Suspended

316



ARES LD/LI
Suspended

316

DOURO



DOURO AP-5
Wall

326



DOURO AP-7
Wall

328



DOURO MC
Table Lamp

330



DOURO PA-2
Floor

332

WALL



A313

336



BERKA

340




STRETTO

344



NEXUS

346



ECLIPSE

350



BACO

354

SILVY



SILVY
Suspended

320



ODL-010-PA

358



ODL-015-PA

360



ARCHITECTURAL LIGHTING

BOYA

pag. 032

ASTRA

pag. 064

TUPOLI

pag. 096

VON

pag. 126

PROFILE SYSTEMS

pag. 168

CARDAN

pag. 286

ERUS

pag. 300

ARES

pag. 314

SILVY

pag. 318

DOURO

pag. 324

WALL


pag. 334

BOYA SUSPENDED

Centra|station

Departures			
Time	Destination	Platform	Gate
12:00	TO 1001	1001	1001
12:15	TO 1002	1002	1002
12:30	TO 1003	1003	1003
12:45	TO 1004	1004	1004
13:00	TO 1005	1005	1005
13:15	TO 1006	1006	1006
13:30	TO 1007	1007	1007
13:45	TO 1008	1008	1008
14:00	TO 1009	1009	1009
14:15	TO 1010	1010	1010
14:30	TO 1011	1011	1011
14:45	TO 1012	1012	1012
15:00	TO 1013	1013	1013
15:15	TO 1014	1014	1014
15:30	TO 1015	1015	1015
15:45	TO 1016	1016	1016
16:00	TO 1017	1017	1017
16:15	TO 1018	1018	1018
16:30	TO 1019	1019	1019
16:45	TO 1020	1020	1020

Arrivals			
Time	Origin	Platform	Gate
12:00	FROM 1001	1001	1001
12:15	FROM 1002	1002	1002
12:30	FROM 1003	1003	1003
12:45	FROM 1004	1004	1004
13:00	FROM 1005	1005	1005
13:15	FROM 1006	1006	1006
13:30	FROM 1007	1007	1007
13:45	FROM 1008	1008	1008
14:00	FROM 1009	1009	1009
14:15	FROM 1010	1010	1010
14:30	FROM 1011	1011	1011
14:45	FROM 1012	1012	1012
15:00	FROM 1013	1013	1013
15:15	FROM 1014	1014	1014
15:30	FROM 1015	1015	1015
15:45	FROM 1016	1016	1016
16:00	FROM 1017	1017	1017
16:15	FROM 1018	1018	1018
16:30	FROM 1019	1019	1019
16:45	FROM 1020	1020	1020

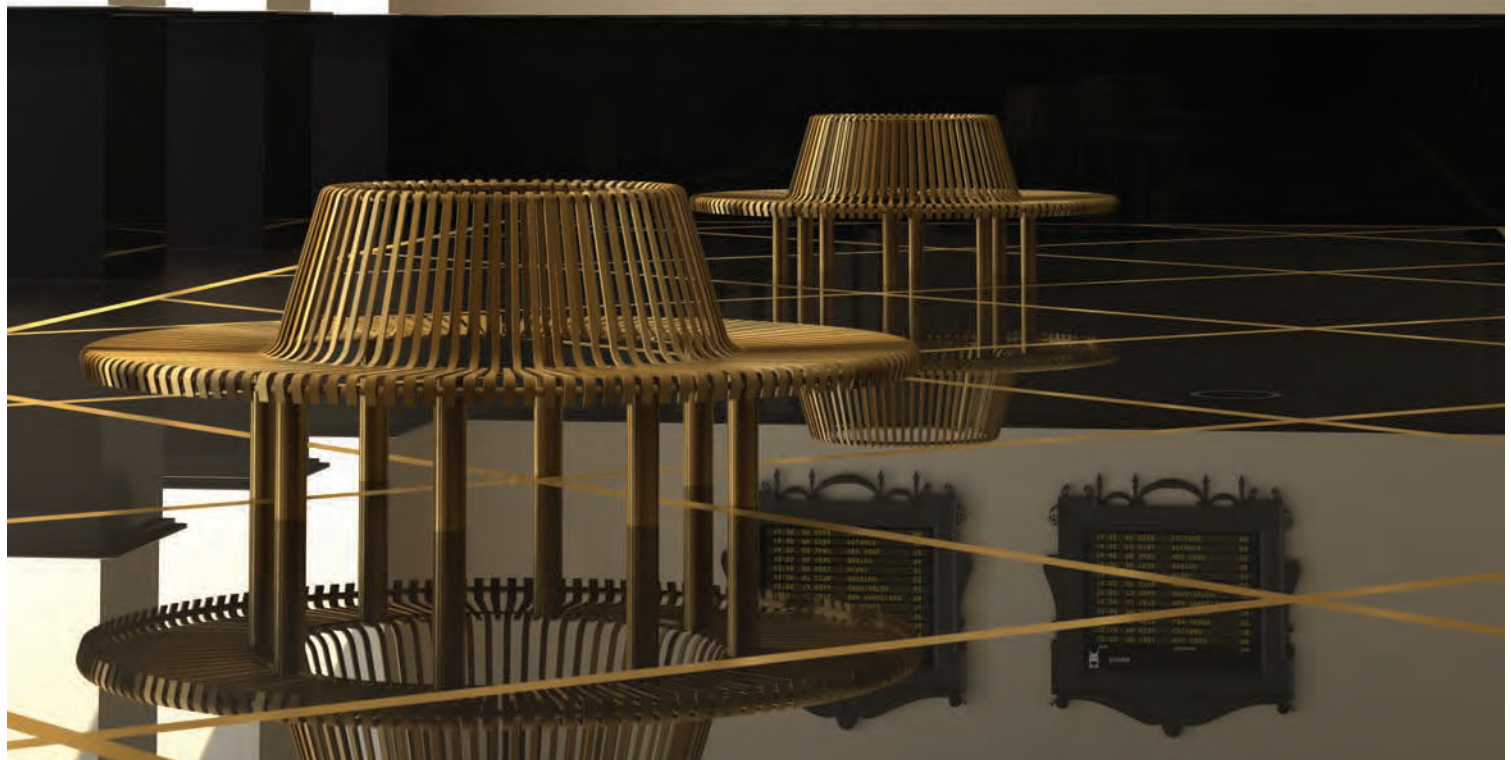




> BOYA 150 UP&DOWN SUSPENDED

BOYA 90 UP

INDIRECT LIGHT

SUSPENDED

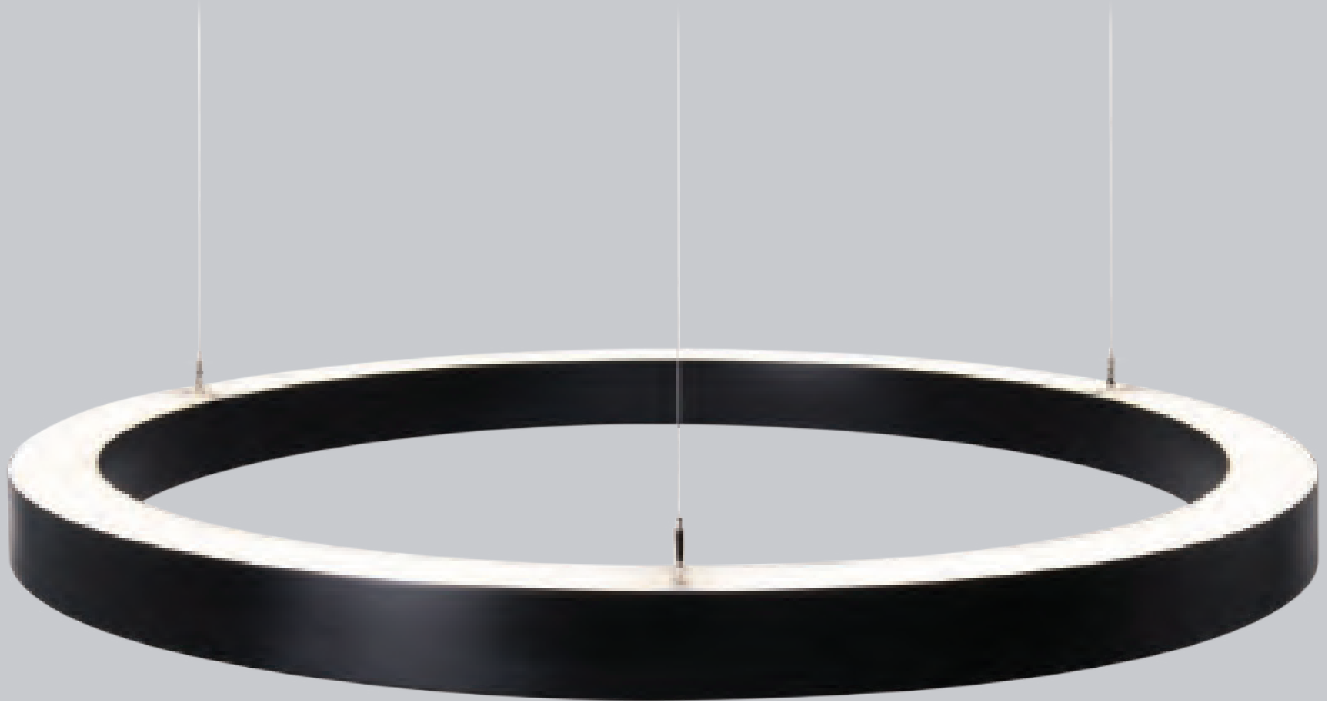



EN

- > Decorative pendant luminaire with indirect light distribution.
- > Stainless steel cable suspension with integrated tool-less height adjustment.
- > Available in three standard diameters or customized up to 6 metres.
- > Easy installation without opening the luminaire.
- > Opal PMMA diffuser.
- > Aluminium body without visible joins.
- > External finish in customer's chosen colour with white interior to maintain light uniformity and higher reflection coefficient.

FR

- > Suspension à émission indirecte du flux lumineux.
- > Suspension par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Disponible en trois diamètres standard ou sur mesure jusqu'à 6 mètres.
- > Installation simple sans devoir ouvrir le luminaire.
- > Diffuseur en PMMA Opale.
- > Corps en aluminium sans aucune soudure apparent.
- > Finition extérieure du luminaire dans la couleur choisie par le client avec intérieur toujours en blanc pour maintenir l'uniformité de la lumière et un haut coefficient de réflexion.

INDIRECT LIGHT



QUICK INFO

GENERAL

Suspended
IP40
650°C
Class I
Ta= -20°C +40°C

OPTIC

Opal PMMA

LED

Efficacy up to 141 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L80/B10 @Tc=55°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

BOYA 90 UP SUSPENDED - INDIRECT LIGHT
OPAL DIFFUSER

MATT WHITE FINISHING


Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1000	1457	28	33.06.40.000722	33.06.40.000731
1400	2004	38	33.06.40.000723	33.06.40.000732
1800	2596	49	33.06.40.000724	33.06.40.000733
4000 K				
1000	1457	26	33.06.40.000728	33.06.40.001053
1400	2004	36	33.06.40.000729	33.06.40.001054
1800	2596	47	33.06.40.000730	33.06.40.001055

MATT BLACK FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1000	1457	28	33.06.40.000725	33.06.40.000734
1400	2004	38	33.06.40.000726	33.06.40.000735
1800	2596	49	33.06.40.000727	33.06.40.000736
4000 K				
1000	1457	26	33.06.40.000737	33.06.40.001056
1400	2004	36	33.06.40.000738	33.06.40.001057
1800	2596	47	33.06.40.000739	33.06.40.001058


COMPONENTS

SUSPENSION SYSTEM

S1	S2	S3
		
3 pcs 3 Points Suspension + Recessed Ceiling Cup	3 pcs 3 Points Suspension + Surface Ceiling Cup	1 Point Suspension + Surface Ceiling Cup

ON/OFF	1 m	3 m	5 m
S1 - White Ø80 mm	35.06.40.001634	35.06.40.002263	35.06.40.002266
S2 - White Ø103x36 mm	35.06.40.001635	35.06.40.002264	35.06.40.002267
S3 - White Ø120x30 mm	35.06.40.001636	35.06.40.002265	35.06.40.002268

DALI	1 m	3 m	5 m
S1 - White Ø80 mm	35.06.40.002283	35.06.40.002284	35.06.40.002285
S2 - White Ø103x36 mm	35.06.40.002286	35.06.40.002287	35.06.40.002288
S3 - White Ø120x30 mm	35.06.40.002289	35.06.40.002290	35.06.40.002291



BOYA 90 DOWN

DIRECT LIGHT

SUSPENDED




EN

- > Homogeneous lighting luminaire with direct light emission.
- > Pendant luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Available in three standard diameters or customized up to 6 metres.
- > Easy installation without opening the luminaire.
- > Opal PMMA diffuser.
- > Aluminium body without visible joins.
- > External finish in customer's chosen colour with white interior to maintain light uniformity and higher reflection coefficient.

FR

- > Luminaire d'éclairage homogène à émission directe du flux lumineux.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Disponible en trois diamètres standard ou sur mesure jusqu'à 6 mètres.
- > Installation simple sans devoir ouvrir le luminaire.
- > Diffuseur en PMMA Opale.
- > Corps en aluminium sans aucune soudure apparent.
- > Finition extérieure du luminaire dans la couleur choisie par le client avec intérieur toujours en blanc pour maintenir l'uniformité de la lumière et un haut coefficient de réflexion.

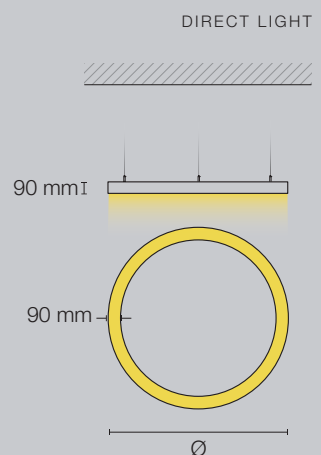

QUICK INFO

GENERAL

Suspended
IP40
650°C
Class I
Ta= -20°C +40°C

OPTIC

Opal PMMA

LED

Efficacy up to 141 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L80/B10 @TC=55°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM


Bluetooth

FINISHING

 Other Colours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

BOYA 90 DOWN SUSPENDED - DIRECT LIGHT
OPAL DIFFUSER

MATT WHITE FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1000	3250	50	33.06.40.000682	33.06.40.000695
1400	4652	72	33.06.40.000683	33.06.40.000696
1800	6053	94	33.06.40.000684	33.06.40.000697
4000 K				
1000	3250	48	33.06.40.000692	33.06.40.000768
1400	4652	68	33.06.40.000693	33.06.40.000769
1800	6053	89	33.06.40.000694	33.06.40.000770


MATT BLACK FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1000	3250	50	33.06.40.000685	33.06.40.000698
1400	4652	72	33.06.40.000690	33.06.40.000699
1800	6053	94	33.06.40.000691	33.06.40.000700
4000 K				
1000	3250	48	33.06.40.000701	33.06.40.000777
1400	4652	68	33.06.40.000702	33.06.40.000778
1800	6053	89	33.06.40.000703	33.06.40.000779

COMPONENTS

SUSPENSION SYSTEM


S1



3 pcs
3 Points Suspension +
Recessed Ceiling Cup



S2



3 pcs
3 Points Suspension +
Surface Ceiling Cup



S3



1 Point Suspension +
Surface Ceiling Cup

ON/OFF	1m	3m	5m
S1 - White Ø80 mm	35.06.40.001634	35.06.40.002263	35.06.40.002266
S2 - White Ø103x36 mm	35.06.40.001635	35.06.40.002264	35.06.40.002267
S3 - White Ø120x30 mm	35.06.40.001636	35.06.40.002265	35.06.40.002268

DALI	1m	3m	5m
S1 - White Ø80 mm	35.06.40.002283	35.06.40.002284	35.06.40.002285
S2 - White Ø103x36 mm	35.06.40.002286	35.06.40.002287	35.06.40.002288
S3 - White Ø120x30 mm	35.06.40.002289	35.06.40.002290	35.06.40.002291

BOYA 90 UP&DOWN

INDIRECT & DIRECT LIGHT

SUSPENDED




EN

- > Homogeneous lighting luminaire with 70% direct and 30% indirect light distribution.
- > Pendant luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Available in three standard diameters or customized up to 6 metres.
- > Easy installation without opening the luminaire.
- > Opal PMMA diffuser.
- > Aluminium body without visible joins.
- > External finish in customer's chosen colour with white interior to maintain light uniformity and higher reflection coefficient.

FR

- > Luminaire à éclairage homogène et émission directe (70%) et indirecte (30%) du flux.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Disponible en trois diamètres standard ou sur mesure jusqu'à 6 mètres.
- > Installation simple sans devoir ouvrir le luminaire.
- > Diffuseur en PMMA Opale.
- > Corps en aluminium sans aucune soudure apparent.
- > Finition extérieure du luminaire dans la couleur choisie par le client avec intérieur toujours en blanc pour maintenir l'uniformité de la lumière et un haut coefficient de réflexion.

INDIRECT & DIRECT LIGHT

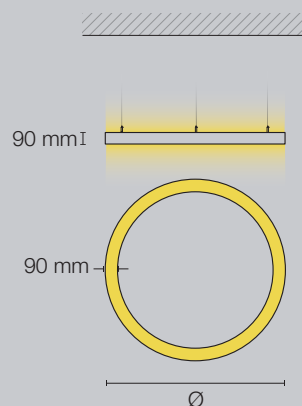

QUICK INFO

GENERAL

Suspended
IP40
650°C
Class I
Ta= -20°C +40°C

OPTIC

Opal PMMA

LED

Efficacy up to 141 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L80/B10 @Tc=55°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI
Direct / Indirect - Simultaneous Control

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut
Direct / Indirect - Separate Control

CONTROL SYSTEM


Bluetooth

FINISHING

Other Colours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

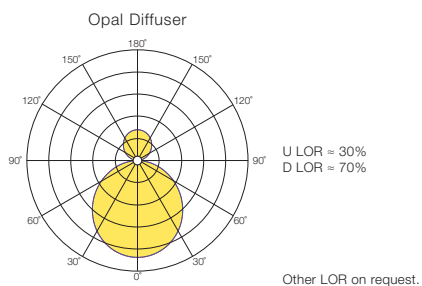BOYA 90 UP&DOWN SUSPENDED - INDIRECT & DIRECT LIGHT
OPAL DIFFUSER

MATT WHITE FINISHING



Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1000	4315	64	33.06.40.000740	33.06.40.000749
1400	6115	90	33.06.40.000741	33.06.40.000750
1800	7948	118	33.06.40.000742	33.06.40.000751
4000 K				
1000	4315	61	33.06.40.000746	33.06.40.001059
1400	6115	87	33.06.40.000747	33.06.40.001060
1800	7948	113	33.06.40.000748	33.06.40.001061

MATT BLACK FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1000	4315	64	33.06.40.000743	33.06.40.000752
1400	6115	90	33.06.40.000744	33.06.40.000753
1800	7948	118	33.06.40.000745	33.06.40.000754
4000 K				
1000	4315	61	33.06.40.000755	33.06.40.001062
1400	6115	87	33.06.40.000756	33.06.40.001063
1800	7948	113	33.06.40.000757	33.06.40.001064

COMPONENTS

SUSPENSION SYSTEM

S1	S2	S3
		
3 pcs	3 pcs	
3 Points Suspension + Recessed Ceiling Cup	3 Points Suspension + Surface Ceiling Cup	1 Point Suspension + Surface Ceiling Cup

ON/OFF	1 m	3 m	5 m
S1 - White Ø80 mm	35.06.40.001634	35.06.40.002263	35.06.40.002266
S2 - White Ø103x36 mm	35.06.40.001635	35.06.40.002264	35.06.40.002267
S3 - White Ø120x30 mm	35.06.40.001636	35.06.40.002265	35.06.40.002268

DALI	1 m	3 m	5 m
S1 - White Ø80 mm	35.06.40.002283	35.06.40.002284	35.06.40.002285
S2 - White Ø103x36 mm	35.06.40.002286	35.06.40.002287	35.06.40.002288
S3 - White Ø120x30 mm	35.06.40.002289	35.06.40.002290	35.06.40.002291

BOYA 150 UP&DOWN

INDIRECT & DIRECT LIGHT
SUSPENDED




EN

- > Homogeneous lighting luminaire with 70% direct and 30% indirect light distribution.
- > Pendant luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Available in four standard diameters or customized up to 6 metres.
- > Easy installation without opening the luminaire.
- > Opal PMMA diffuser.
- > Aluminium body without visible joins.
- > External finish in customer's chosen colour with white interior to maintain light uniformity and higher reflection coefficient.

FR

- > Luminaire à éclairage homogène et émission directe (70%) et indirecte (30%) du flux.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Disponible en quatre diamètres standard ou sur mesure jusqu'à 6 mètres.
- > Installation simple sans devoir ouvrir le luminaire.
- > Diffuseur en PMMA Opale.
- > Corps en aluminium sans aucune soudure apparent.
- > Finition extérieure du luminaire dans la couleur choisie par le client avec intérieur toujours en blanc pour maintenir l'uniformité de la lumière et un haut coefficient de réflexion.

INDIRECT & DIRECT LIGHT



QUICK INFO**GENERAL**

Suspended
IP40
650°C
Class I
Ta= -20°C +35°C

OPTIC

Opal PMMA

LED

Efficacy up to 197 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI
Direct / Indirect - Simultaneous Control

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS**LED**

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut
Direct / Indirect - Separate Control

CONTROL SYSTEM

Bluetooth

FINISHING


 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS


Motion
Ambient Light
Motion & Ambient Light

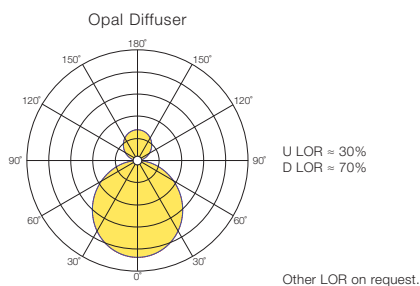**BOYA 150 UP&DOWN SUSPENDED - INDIRECT & DIRECT LIGHT OPAL DIFFUSER****MATT WHITE FINISHING**


Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
800	5708	61	33.06.40.001398	33.06.40.001402
1000	7511	78	33.06.40.001399	33.06.40.001403
1200	9180	95	33.06.40.001400	33.06.40.001404
1500	11701	121	33.06.40.001401	33.06.40.001405
4000 K				
800	5976	61	33.06.40.001414	33.06.40.001418
1000	7864	78	33.06.40.001415	33.06.40.001419
1200	9611	95	33.06.40.001416	33.06.40.001420
1500	12250	121	33.06.40.001417	33.06.40.001421

MATT BLACK FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
800	5708	61	33.06.40.001406	33.06.40.001410
1000	7511	78	33.06.40.001407	33.06.40.001411
1200	9180	95	33.06.40.001408	33.06.40.001412
1500	11701	121	33.06.40.001409	33.06.40.001413
4000 K				
800	5976	61	33.06.40.001422	33.06.40.001426
1000	7864	78	33.06.40.001423	33.06.40.001427
1200	9611	95	33.06.40.001424	33.06.40.001428
1500	12250	121	33.06.40.001425	33.06.40.001429

COMPONENTS**SUSPENSION SYSTEM****S1**

3 pcs
3 Points Suspension +
Recessed Ceiling Cup

**S2**

3 pcs
3 Points Suspension +
Surface Ceiling Cup

**S3**

1 Point Suspension +
Surface Ceiling Cup

ON/OFF	1 m	3 m	5 m
S1 - White Ø80 mm	35.06.40.001634	35.06.40.002263	35.06.40.002266
S2 - White Ø103x36 mm	35.06.40.001635	35.06.40.002264	35.06.40.002267
S3 - White Ø120x30 mm	35.06.40.001636	35.06.40.002265	35.06.40.002268

DALI	1 m	3 m	5 m
S1 - White Ø80 mm	35.06.40.002283	35.06.40.002284	35.06.40.002285
S2 - White Ø103x36 mm	35.06.40.002286	35.06.40.002287	35.06.40.002288
S3 - White Ø120x30 mm	35.06.40.002289	35.06.40.002290	35.06.40.002291



> **BOYA 150** SUSPENDED



> BOYA 90 SURFACE

BOYA 90 DIRECT LIGHT SURFACE



EN

- > Homogeneous lighting luminaire with direct light emission.
- > Surface-mounted luminaire.
- > Available in three standard diameters or customized up to 6 metres.
- > Opal PMMA diffuser.
- > Aluminium body without visible joins.
- > External finish in customer's chosen colour with white interior to maintain light uniformity and higher reflection coefficient.

FR

- > Luminaire d'éclairage homogène à émission directe du flux lumineux.
- > Pour application apparente.
- > Disponible en trois diamètres standard ou sur mesure jusqu'à 6 mètres.
- > Diffuseur en PMMA Opale.
- > Corps en aluminium sans aucune soudure apparent.
- > Finition extérieure du luminaire dans la couleur choisie par le client avec intérieur toujours en blanc pour maintenir l'uniformité de la lumière et un haut coefficient de réflexion.

QUICK INFO**GENERAL**

Surface
IP40
650°C
Class I
Ta= -20°C +40°C

OPTIC

Opal PMMA

LED

Efficacy up to 141 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L80/B10 @Tc=55°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS**LED**

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

SENSORS



Motion
Ambient Light
Motion & Ambient Light

**BOYA 90 SURFACE - DIRECT LIGHT
OPAL DIFFUSER****MATT WHITE FINISHING**

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1000	3250	50	33.06.30.000456	33.06.30.000471
1400	4652	72	33.06.30.000457	33.06.30.000472
1800	6053	94	33.06.30.000458	33.06.30.000473
4000 K				
1000	3250	48	33.06.30.000468	33.06.30.000486
1400	4652	68	33.06.30.000469	33.06.30.000487
1800	6053	89	33.06.30.000470	33.06.30.000488

MATT BLACK FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1000	3250	50	33.06.30.000459	33.06.30.000474
1400	4652	72	33.06.30.000466	33.06.30.000475
1800	6053	94	33.06.30.000467	33.06.30.000476
4000 K				
1000	3250	48	33.06.30.000477	33.06.30.000489
1400	4652	68	33.06.30.000484	33.06.30.000490
1800	6053	89	33.06.30.000485	33.06.30.000491



BOYA 90 IN
SUSPENDED





BOYA 90 IN SUSPENDED



EN

- > Inner light homogeneous lighting luminaire.
- > Pendant luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Available in three standard diameters or customized up to 6 metres.
- > Easy installation without opening the luminaire.
- > Opal Polycarbonate diffuser.
- > Aluminium body without visible joins.
- > External finish in customer's chosen colour with white interior to maintain light uniformity and higher reflection coefficient.

FR

- > Luminaire à éclairage homogène à émission interne de lumière.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Disponible en trois diamètres standard ou sur mesure jusqu'à 6 mètres.
- > Installation simple sans devoir ouvrir le luminaire.
- > Diffuseur en Polycarbonate Opale.
- > Corps en aluminium sans aucune soudure apparent.
- > Finition extérieure du luminaire dans la couleur choisie par le client avec intérieur toujours en blanc pour maintenir l'uniformité de la lumière et un haut coefficient de réflexion.

QUICK INFO

GENERAL

Suspended
IP40
850°C
Class I
Ta= -20°C +40°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 141 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L80/B10 @Tc=55°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM


Bluetooth

FINISHING

Other Colours

SENSORS

Motion
Ambient Light
Motion & Ambient Light



BOYA 90 IN SUSPENDED

OPAL DIFFUSER

MATT WHITE FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1000	3304	54	33.06.40.001255	33.06.40.001261
1400	4636	76	33.06.40.001256	33.06.40.001262
1800	5968	97	33.06.40.001257	33.06.40.001263
4000 K				
1000	3304	51	33.06.40.001267	33.06.40.001273
1400	4636	72	33.06.40.001268	33.06.40.001274
1800	5968	92	33.06.40.001269	33.06.40.001275


MATT BLACK FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1000	3304	54	33.06.40.001258	33.06.40.001264
1400	4636	76	33.06.40.001259	33.06.40.001265
1800	5968	97	33.06.40.001260	33.06.40.001266
4000 K				
1000	3304	51	33.06.40.001270	33.06.40.001276
1400	4636	72	33.06.40.001271	33.06.40.001277
1800	5968	92	33.06.40.001272	33.06.40.001278

COMPONENTS


SUSPENSION SYSTEM

S1



3 pcs
3 Points Suspension +
Recessed Ceiling Cup

S2




3 pcs
3 Points Suspension +
Surface Ceiling Cup

S3




1 Point Suspension +
Surface Ceiling Cup

TYPE	1m	3m	5m
S1 - White Ø80 mm	35.06.40.001634	35.06.40.002263	35.06.40.002266
S2 - White Ø350x50 mm	35.06.40.002271	35.06.40.002274	35.06.40.002277
S3 - White Ø350x50 mm	35.06.40.002272	35.06.40.002275	35.06.40.002278




BOYA 140 OUT
SUSPENDED

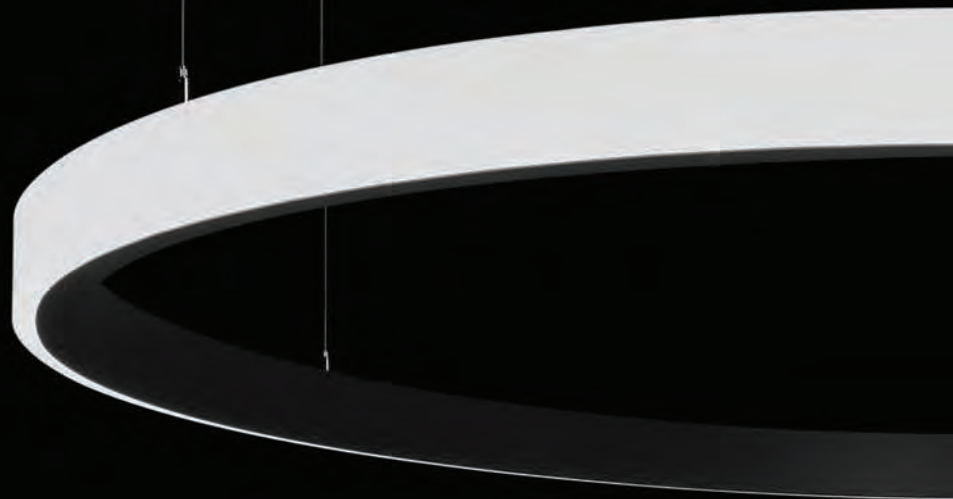



BOYA 140 OUT

SUSPENDED

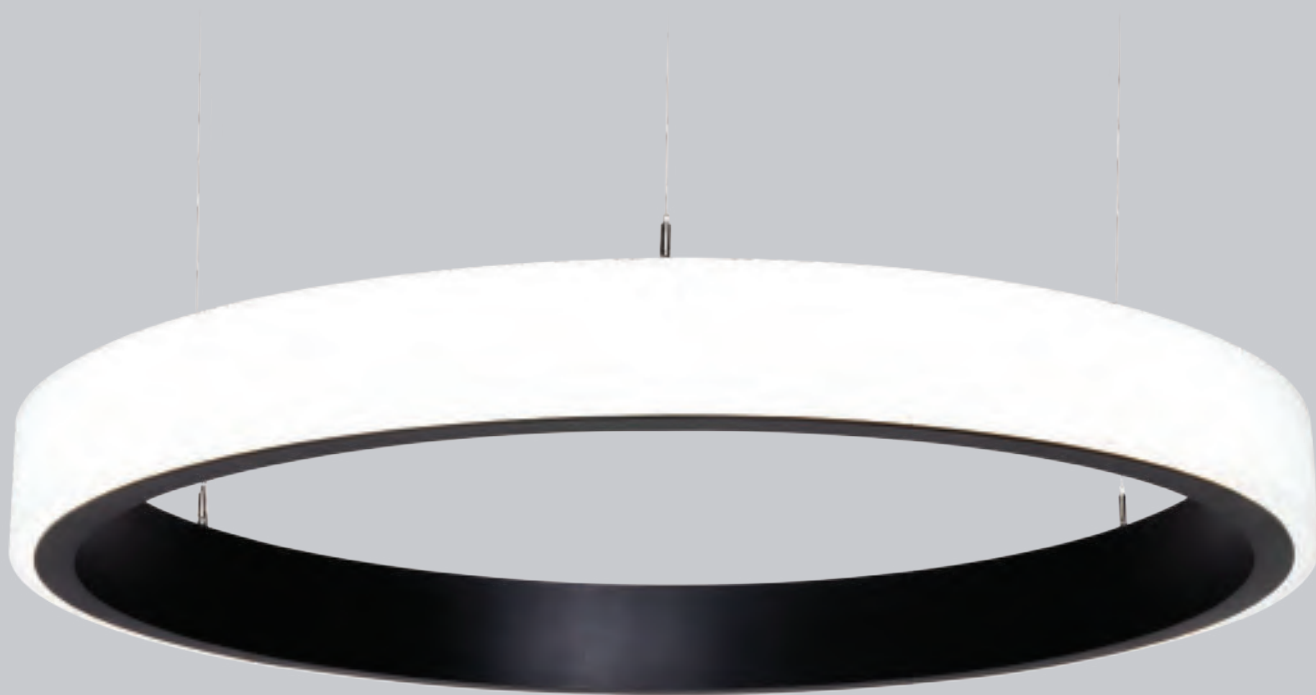


EN

- > Luminaire with homogeneous external light emission around it's perimeter.
- > Pendant luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Easy installation without opening the luminaire.
- > Opal PMMA diffuser.
- > Aluminium body without visible joins.
- > External finish in customer's chosen colour with white interior to maintain light uniformity and higher reflection coefficient.

FR

- > Luminaire à éclairage externe homogène tout autour de son périmètre.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Installation simple sans devoir ouvrir le luminaire.
- > Diffuseur en PMMA Opale.
- > Corps en aluminium sans aucune soudure apparent.
- > Finition extérieure du luminaire dans la couleur choisie par le client avec intérieur toujours en blanc pour maintenir l'uniformité de la lumière et un haut coefficient de réflexion.

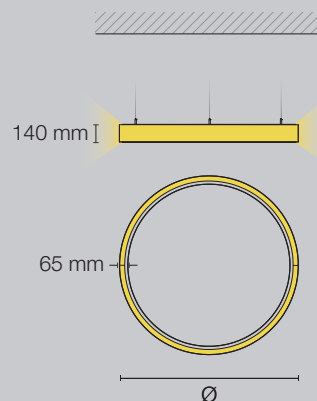

QUICK INFO

GENERAL

Suspended
IP40
650°C
Class I
Ta= -20°C +40°C

OPTIC

Opal PMMA

LED

Efficacy up to 141 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L80/B10 @Tc=55°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM


Bluetooth

FINISHING

 Other Colours

SENSORS

Motion
Ambient Light
Motion & Ambient Light



BOYA 140 OUT SUSPENDED

OPAL DIFFUSER

MATT WHITE FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1000	4652	46	33.06.40.001279	33.06.40.001285
1400	6766	67	33.06.40.001280	33.06.40.001286
1800	8880	89	33.06.40.001281	33.06.40.001287
2500	18150	195	33.06.40.001319	33.06.40.001321
4000 K				
1000	4652	46	33.06.40.001291	33.06.40.001297
1400	6766	67	33.06.40.001292	33.06.40.001298
1800	8880	89	33.06.40.001293	33.06.40.001299
2500	18150	185	33.06.40.001323	33.06.40.001325


MATT BLACK FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1000	4652	46	33.06.40.001282	33.06.40.001288
1400	6766	67	33.06.40.001283	33.06.40.001289
1800	8880	89	33.06.40.001284	33.06.40.001290
2500	18150	195	33.06.40.001320	33.06.40.001322
4000 K				
1000	4652	46	33.06.40.001294	33.06.40.001300
1400	6766	67	33.06.40.001295	33.06.40.001301
1800	8880	89	33.06.40.001296	33.06.40.001302
2500	18150	185	33.06.40.001324	33.06.40.001326

COMPONENTS

SUSPENSION SYSTEM


S1



3/4 pcs
3/4 Points Suspension +
Recessed Ceiling Cup



S2



3/4 pcs
3/4 Points Suspension +
Surface Ceiling Cup

S3



1 Point Suspension +
Surface Ceiling Cup

BOYA - Ø1000 / Ø1400 / Ø1800

3 Points Suspension

	1m	3m	5m
S1 - White Ø80 mm	35.06.40.001634	35.06.40.002263	35.06.40.002266
S2 - White Ø350x50 mm	35.06.40.002271	35.06.40.002274	35.06.40.002277
S3 - White Ø350x50 mm	35.06.40.002272	35.06.40.002275	35.06.40.002278

BOYA - Ø2500

4 Points Suspension

	1m	3m	5m
S1 - White Ø80 mm	35.06.40.003015	35.06.40.003017	35.06.40.003019
S2 - White Ø350x50 mm	35.06.40.003016	35.06.40.003018	35.06.40.003020

BOYA 90 BULBS
SUSPENDED





BOYA 90 BULBS IN SUSPENDED




EN

- > Inner light decorative luminaire.
- > Pendant luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Available in three standard diameters or customized up to 6 metres.
- > Easy installation without opening the luminaire.
- > Aluminium body without visible joins.
- > Matt black or matt white standard finish. Other colours are available on request.

FR

- > Suspension décorative à émission interne de lumière.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Disponible en trois diamètres standard ou sur mesure jusqu'à 6 mètres.
- > Installation simple sans devoir ouvrir le luminaire.
- > Corps en aluminium sans aucune soudure apparente.
- > Finition standard en noir mat ou blanc mat. Autres couleurs sont disponibles sur demande.

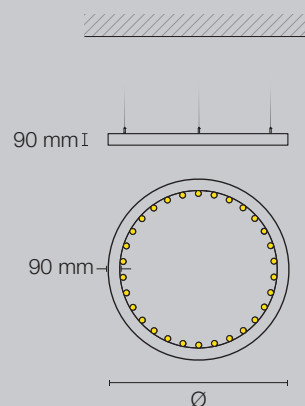

QUICK INFO

GENERAL

Suspended
IP20
960°C
Class I
Ta= -20°C +40°C

LAMP - NOT INCLUDED

E14 LED

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

FINISHING

 Other Colours

SENSORS

Motion

BOYA 90 BULBS IN SUSPENDED - LAMP

MATT WHITE FINISHING

Ø (mm)	LAMP Number	LAMP Power (W)	ON/OFF
E14			
1000	21	max. 50	33.06.40.001386
1400	30	max. 50	33.06.40.001387
1800	39	max. 50	33.06.40.001388

> Lamp not included.

MATT BLACK FINISHING


Ø (mm)	LAMP Number	LAMP Power (W)	ON/OFF
E14			
1000	21	max. 50	33.06.40.001389
1400	30	max. 50	33.06.40.001390
1800	39	max. 50	33.06.40.001391

> Lamp not included.

COMPONENTS

SUSPENSION SYSTEM


S1



3 pcs

3 Points Suspension +
Recessed Ceiling Cup

S2



3 pcs

3 Points Suspension +
Surface Ceiling Cup

S3



1 Point Suspension +
Surface Ceiling Cup

ON/OFF	1 m	3 m	5 m
S1 - White Ø80 mm	35.06.40.001634	35.06.40.002263	35.06.40.002266
S2 - White Ø103x36 mm	35.06.40.001635	35.06.40.002264	35.06.40.002267
S3 - White Ø120x30 mm	35.06.40.001636	35.06.40.002265	35.06.40.002268


RECOMMENDED LAMPS



OSRAM
PARATHOM
Retrofit
CLASSIC P
4W



PHILIPS
CLA
LEDLuster D
5W



Lamp: 4W LED (E14).

BOYA 90 BULBS OUT SUSPENDED




EN

- > Outer light decorative luminaire.
- > Pendant luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Available in three standard diameters or customized up to 6 metres.
- > Easy installation without opening the luminaire.
- > Aluminium body without visible joins.
- > Matt black or matt white standard finish. Other colours are available on request.

FR

- > Suspension décorative à émission externe de lumière.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Disponible en trois diamètres standard ou sur mesure jusqu'à 6 mètres.
- > Installation simple sans devoir ouvrir le luminaire.
- > Corps en aluminium sans aucune soudure apparente.
- > Finition standard en noir mat ou blanc mat. Autres couleurs sont disponibles sur demande.

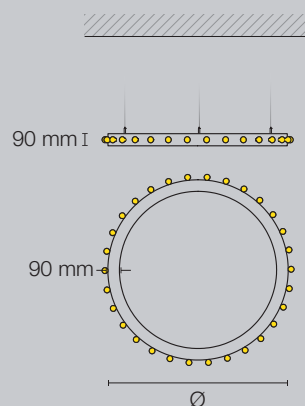

QUICK INFO

GENERAL

Suspended
IP20
960°C
Class I
Ta= -20°C +40°C

LAMP - NOT INCLUDED

E14 LED

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

FINISHING

 Other Colours

SENSORS

Motion

BOYA 90 BULBS OUT SUSPENDED - LAMP

MATT WHITE FINISHING

Ø (mm)	LAMP Number	LAMP Power (W)	ON/OFF
E14			
1000	21	max. 50	33.06.40.001392
1400	30	max. 50	33.06.40.001393
1800	39	max. 50	33.06.40.001394

> Lamp not included.

MATT BLACK FINISHING


Ø (mm)	LAMP Number	LAMP Power (W)	ON/OFF
E14			
1000	21	max. 50	33.06.40.001395
1400	30	max. 50	33.06.40.001396
1800	39	max. 50	33.06.40.001397

> Lamp not included.

COMPONENTS


SUSPENSION SYSTEM

S1



3 pcs
3 Points Suspension +
Recessed Ceiling Cup

S2



3 pcs
3 Points Suspension +
Surface Ceiling Cup

S3



1 Point Suspension +
Surface Ceiling Cup

ON/OFF	1 m	3 m	5 m
S1 - White Ø80 mm	35.06.40.001634	35.06.40.002263	35.06.40.002266
S2 - White Ø103x36 mm	35.06.40.001635	35.06.40.002264	35.06.40.002267
S3 - White Ø120x30 mm	35.06.40.001636	35.06.40.002265	35.06.40.002268


RECOMMENDED LAMPS



OSRAM
PARATHOM
Retrofit
CLASSIC P
4W



PHILIPS
CLA
LEDLuster D
5W



Lamp: 4W LED (E14).




> BOYA 140 FLOOR



> BOYA 140 FLOOR

BOYA 140

FLOOR

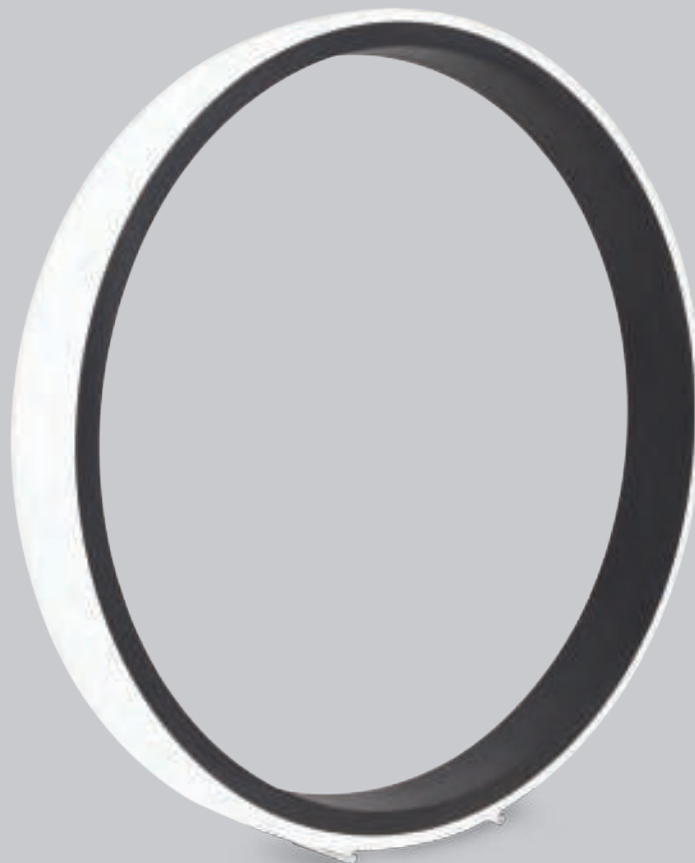

EN

- > Floor standing lamp with homogeneous external light emission around it's perimeter.
- > Pre-wired with 2500 mm feed cable, Type F plug and external box with built-in dimming push-button.
- > Opal PMMA diffuser.
- > Aluminium body without visible joins.
- > External finish in customer's chosen colour with white interior to maintain light uniformity and higher reflection coefficient.

FR

- > Lampe sur pied à éclairage externe homogène tout autour de son périmètre.
- > Fourni avec câble d'alimentation de 2500 mm, fiche du Type F et boîtier externe avec bouton pour gradation de la lumière.
- > Diffuseur en PMMA Opale.
- > Corps en aluminium sans aucune soudure apparent.
- > Finition extérieure du luminaire dans la couleur choisie par le client avec intérieur toujours en blanc pour maintenir l'uniformité de la lumière et un haut coefficient de réflexion.

QUICK INFO**GENERAL**

Floor
IP40
650°C
Class I
Ta= -20°C +40°C

OPTIC

Opal PMMA

LED

Efficacy up to 136 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L80/B10 @Tc=55°C

ELECTRICAL SYSTEM

230V/50Hz
DIMMABLE

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

BOYA 140 FLOOR**OPAL DIFFUSER****MATT WHITE FINISHING**

Ø (mm)	Output (lm)	System (W)	DIMMABLE
3000 K			
1400	6636	67	33.06.40.001119
4000 K			
1400	6636	67	33.06.40.001123

MATT BLACK FINISHING

Ø (mm)	Output (lm)	System (W)	DIMMABLE
3000 K			
1400	6636	67	33.06.40.001120
4000 K			
1400	6636	67	33.06.40.001124

OPTIONS**LED**

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM



DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

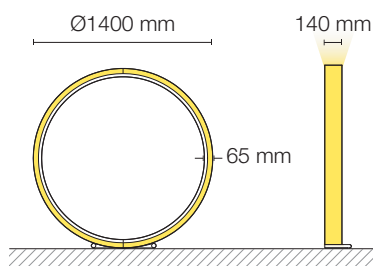

ASTRA

SUSPENDED





ASTRA 90 DIRECT LIGHT SUSPENDED




EN

- > Homogeneous lighting luminaire with direct light emission.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Available in four standard diameters or customized up to 6 metres.
- > Magnetic clamping of the body to the luminaire base.
- > Micro prismatic PMMA diffuser for glare control (UGR <19) or Opal Polycarbonate diffuser.
- > Single-piece seamless aluminium body without visible screws.
- > External finish in customer's chosen colour with white interior to maintain light uniformity and higher reflection coefficient.

FR

- > Luminaire d'éclairage homogène à émission directe du flux lumineux.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Disponible en quatre diamètres standard ou sur mesure jusqu'à 6 mètres.
- > Fixation magnétique du corps à la base du luminaire.
- > Diffuseur en PMMA Microprismatique pour contrôle de l'éblouissement (UGR <19) ou diffuseur Polycarbonate Opale.
- > Corps en aluminium d'une seule pièce sans vis apparentes.
- > Finition extérieure du luminaire dans la couleur choisie par le client avec intérieur toujours en blanc pour maintenir l'uniformité de la lumière et un haut coefficient de réflexion.

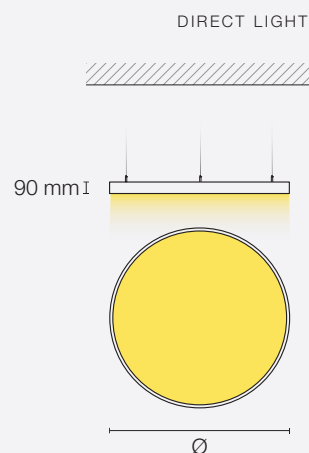

QUICK INFO

GENERAL

Suspended
IP40
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 187 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L90/B10 @TC=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

ASTRA 90 SUSPENDED - DIRECT LIGHT


OPAL DIFFUSER

MATT WHITE FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	2020	18	33.06.40.001126	33.06.40.001130
	2818	26	33.06.40.001127	33.06.40.001131
550	3498	30	33.06.40.000528	33.06.40.000600
	5358	47	33.06.40.000529	33.06.40.000601
830	7228	59	33.06.40.000530	33.06.40.000602
	11138	94	33.06.40.000531	33.06.40.000603
1110	12808	107	33.06.40.000532	33.06.40.000604
	19619	172	33.06.40.000533	33.06.40.000605
4000 K				
400	2020	18	33.06.40.001142	33.06.40.001146
	2818	26	33.06.40.001143	33.06.40.001147
550	3498	30	33.06.40.000546	33.06.40.000618
	5358	47	33.06.40.000547	33.06.40.000619
830	7228	59	33.06.40.000548	33.06.40.000620
	11138	94	33.06.40.000549	33.06.40.000621
1110	12808	107	33.06.40.000550	33.06.40.000622
	19619	172	33.06.40.000551	33.06.40.000623

MATT BLACK FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	2020	18	33.06.40.001128	33.06.40.001132
	2818	26	33.06.40.001129	33.06.40.001133
550	3498	30	33.06.40.000540	33.06.40.000612
	5358	47	33.06.40.000541	33.06.40.000613
830	7228	59	33.06.40.000542	33.06.40.000614
	11138	94	33.06.40.000543	33.06.40.000615
1110	12808	107	33.06.40.000544	33.06.40.000616
	19619	172	33.06.40.000545	33.06.40.000617
4000 K				
400	2020	18	33.06.40.001144	33.06.40.001148
	2818	26	33.06.40.001145	33.06.40.001149
550	3498	30	33.06.40.000558	33.06.40.000630
	5358	47	33.06.40.000559	33.06.40.000631
830	7228	59	33.06.40.000560	33.06.40.000632
	11138	94	33.06.40.000561	33.06.40.000633
1110	12808	107	33.06.40.000562	33.06.40.000634
	19619	172	33.06.40.000563	33.06.40.000635



QUICK INFO

GENERAL

Suspended
IP40
650°C
Class I
Ta= -20°C +35°C

OPTIC

Micro Prismatic PMMA - UGR <19

LED

Efficacy up to 193 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L90/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

ASTRA 90 SUSPENDED - DIRECT LIGHT
MICRO PRISMATIC DIFFUSER - UGR <19


MATT WHITE FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	2110	18	33.06.40.001134	33.06.40.001138
	2943	26	33.06.40.001135	33.06.40.001139
550	3654	30	33.06.40.000564	33.06.40.000636
	5597	47	33.06.40.000565	33.06.40.000637
830	7467	59	33.06.40.000566	33.06.40.000638
	11476	94	33.06.40.000567	33.06.40.000639
1110	13487	107	33.06.40.000568	33.06.40.000640
	20659	172	33.06.40.000569	33.06.40.000641
4000 K				
400	2110	18	33.06.40.001150	33.06.40.001154
	2943	26	33.06.40.001151	33.06.40.001155
550	3654	30	33.06.40.000582	33.06.40.000654
	5597	47	33.06.40.000583	33.06.40.000655
830	7467	59	33.06.40.000584	33.06.40.000656
	11476	94	33.06.40.000585	33.06.40.000657
1110	13487	107	33.06.40.000586	33.06.40.000658
	20659	172	33.06.40.000587	33.06.40.000659

MATT BLACK FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	2110	18	33.06.40.001136	33.06.40.001140
	2943	26	33.06.40.001137	33.06.40.001141
550	3654	30	33.06.40.000576	33.06.40.000648
	5597	47	33.06.40.000577	33.06.40.000649
830	7467	59	33.06.40.000578	33.06.40.000650
	11476	94	33.06.40.000579	33.06.40.000651
1110	13487	107	33.06.40.000580	33.06.40.000652
	20659	172	33.06.40.000581	33.06.40.000653
4000 K				
400	2110	18	33.06.40.001152	33.06.40.001156
	2943	26	33.06.40.001153	33.06.40.001157
550	3654	30	33.06.40.000594	33.06.40.000666
	5597	47	33.06.40.000595	33.06.40.000667
830	7467	59	33.06.40.000596	33.06.40.000668
	11476	94	33.06.40.000597	33.06.40.000669
1110	13487	107	33.06.40.000598	33.06.40.000670
	20659	172	33.06.40.000599	33.06.40.000671


Micro Prismatic Diffuser - UGR<19



COMPONENTS

SUSPENSION SYSTEM

S1



3 Points Suspension +
Recessed Ceiling Cup

S2



3 Points Suspension +
Surface Ceiling Cup

S3



1 Point Suspension +
Surface Ceiling Cup

ON/OFF

	1 m	3 m	5 m
S1 - Matt White Ø80 mm	35.06.40.001634	35.06.40.002263	35.06.40.002266
S2 - Matt White Ø103x36 mm	35.06.40.001635	35.06.40.002264	35.06.40.002267
S3 - Matt White Ø120x30 mm	35.06.40.001636	35.06.40.002265	35.06.40.002268

DALI

	1 m	3 m	5 m
S1 - Matt White Ø80 mm	35.06.40.002283	35.06.40.002284	35.06.40.002285
S2 - Matt White Ø103x36 mm	35.06.40.002286	35.06.40.002287	35.06.40.002288
S3 - Matt White Ø120x30 mm	35.06.40.002289	35.06.40.002290	35.06.40.002291



ASTRA 150

DIRECT LIGHT

SUSPENDED



EN

- > Homogeneous lighting luminaire with direct light emission.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Available in five standard diameters or customized up to 6 metres.
- > Magnetic clamping of the body to the luminaire base.
- > Opal Polycarbonate diffuser.
- > Single-piece seamless aluminium body without visible screws.
- > External finish in customer's chosen colour with white interior to maintain light uniformity and higher reflection coefficient.

FR

- > Luminaire d'éclairage homogène à émission directe du flux lumineux.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Disponible en cinq diamètres standard ou sur mesure jusqu'à 6 mètres.
- > Fixation magnétique du corps à la base du luminaire.
- > Diffuseur en Polycarbonate Opale.
- > Corps en aluminium d'une seule pièce sans vis apparentes.
- > Finition extérieure du luminaire dans la couleur choisie par le client avec intérieur toujours en blanc pour maintenir l'uniformité de la lumière et un haut coefficient de réflexion.

QUICK INFO

GENERAL

Suspended
IP40
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 179 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light



ASTRA 150 SUSPENDED - DIRECT LIGHT
OPAL DIFFUSER

MATT WHITE FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	1853	20	33.06.40.400000	33.06.40.400004
	2670	32	33.06.40.400001	33.06.40.400005
650	3763	40	33.06.40.600000	33.06.40.600004
	5111	59	33.06.40.600001	33.06.40.600005
800	6882	67	33.06.40.800000	33.06.40.800004
	9356	99	33.06.40.800001	33.06.40.800005
1000	11398	107	33.06.40.100025	33.06.40.100029
	15480	158	33.06.40.100026	33.06.40.100030
1200	17080	160	33.06.40.120000	33.06.40.120004
	23221	235	33.06.40.120001	33.06.40.120005
4000 K				
400	1853	20	33.06.40.400002	33.06.40.400006
	2670	32	33.06.40.400003	33.06.40.400007
650	3763	40	33.06.40.600002	33.06.40.600006
	5111	59	33.06.40.600003	33.06.40.600007
800	6882	67	33.06.40.800002	33.06.40.800006
	9356	99	33.06.40.800003	33.06.40.800007
1000	11398	107	33.06.40.100027	33.06.40.100031
	15480	158	33.06.40.100028	33.06.40.100032
1200	17080	160	33.06.40.120002	33.06.40.120006
	23221	235	33.06.40.120003	33.06.40.120007

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.

DIRECT LIGHT

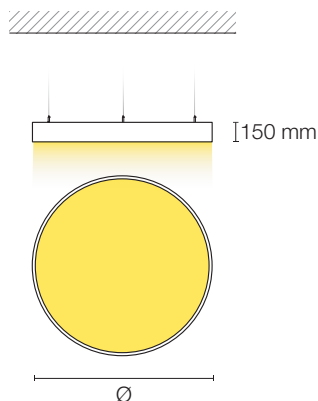

QUICK INFO

GENERAL

Suspended
IP40
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 179 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @TC=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING


 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light



ASTRA 150 SUSPENDED - DIRECT LIGHT

OPAL DIFFUSER

MATT BLACK FINISHING


Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	1853	20	33.06.40.400008	33.06.40.400012
	2670	32	33.06.40.400009	33.06.40.400013
650	3763	40	33.06.40.600008	33.06.40.600012
	5111	59	33.06.40.600009	33.06.40.600013
800	6882	67	33.06.40.800008	33.06.40.800012
	9356	99	33.06.40.800009	33.06.40.800013
1000	11398	107	33.06.40.100033	33.06.40.100037
	15480	158	33.06.40.100034	33.06.40.100038
1200	17080	160	33.06.40.120008	33.06.40.120012
	23221	235	33.06.40.120009	33.06.40.120013
4000 K				
400	1853	20	33.06.40.400010	33.06.40.400014
	2670	32	33.06.40.400011	33.06.40.400015
650	3763	40	33.06.40.600010	33.06.40.600014
	5111	59	33.06.40.600011	33.06.40.600015
800	6882	67	33.06.40.800010	33.06.40.800014
	9356	99	33.06.40.800011	33.06.40.800015
1000	11398	107	33.06.40.100035	33.06.40.100039
	15480	158	33.06.40.100036	33.06.40.100040
1200	17080	160	33.06.40.120010	33.06.40.120014
	23221	235	33.06.40.120011	33.06.40.120015

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.

COMPONENTS

SUSPENSION SYSTEM


S1



3 pcs
3 Points Suspension +
Recessed Ceiling Cup



S2



3 pcs
3 Points Suspension +
Surface Ceiling Cup



S3



1 Point Suspension +
Surface Ceiling Cup

ON/OFF	1 m	3 m	5 m
S1 - White Ø80 mm	35.06.40.001634	35.06.40.002263	35.06.40.002266
S2 - White Ø103x36 mm	35.06.40.001635	35.06.40.002264	35.06.40.002267
S3 - White Ø120x30 mm	35.06.40.001636	35.06.40.002265	35.06.40.002268

DALI	1 m	3 m	5 m
S1 - White Ø80 mm	35.06.40.002283	35.06.40.002284	35.06.40.002285
S2 - White Ø103x36 mm	35.06.40.002286	35.06.40.002287	35.06.40.002288
S3 - White Ø120x30 mm	35.06.40.002289	35.06.40.002290	35.06.40.002291



> ASTRA 150 SUSPENDED

ASTRA 90 DIRECT & INDIRECT LIGHT SUSPENDED




EN

- > Homogeneous lighting luminaire with 70% direct and 30% indirect light distribution.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Available in four standard diameters or customized up to 6 metres.
- > Magnetic clamping of the body to the luminaire base.
- > Micro prismatic PMMA diffuser for glare control (UGR <19) or Opal Polycarbonate diffuser.
- > Single-piece seamless aluminium body without visible screws.
- > External finish in customer's chosen colour with white interior to maintain light uniformity and higher reflection coefficient.

FR

- > Luminaire à éclairage homogène et émission directe (70%) et indirecte (30%) du flux.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Disponible en quatre diamètres standard ou sur mesure jusqu'à 6 mètres.
- > Fixation magnétique du corps à la base du luminaire.
- > Diffuseur en PMMA Microprismatique pour contrôle de l'éblouissement (UGR <19) ou diffuseur Polycarbonate Opale.
- > Corps en aluminium d'une seule pièce sans vis apparentes.
- > Finition extérieure du luminaire dans la couleur choisie par le client avec intérieur toujours en blanc pour maintenir l'uniformité de la lumière et un haut coefficient de réflexion.

DIRECT & INDIRECT LIGHT

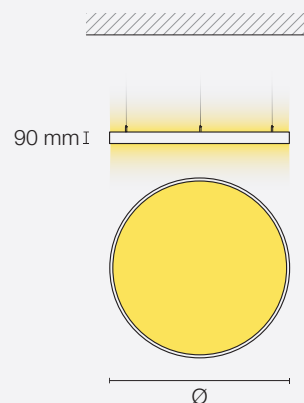

QUICK INFO**GENERAL**

Suspended
IP40
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 187 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI
Direct / Indirect - Simultaneous Control

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS**LED**

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut
Direct / Indirect - Separate Control

CONTROL SYSTEM

Bluetooth

FINISHING


 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

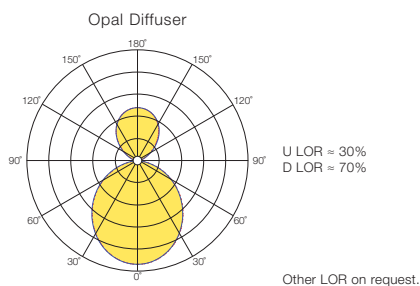**ASTRA 90 SUSPENDED - DIRECT & INDIRECT LIGHT
OPAL DIFFUSER****MATT WHITE FINISHING**

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	3508	31	33.06.40.001158	33.06.40.001162
	4683	43	33.06.40.001159	33.06.40.001163
550	5580	48	33.06.40.000782	33.06.40.000800
	7938	70	33.06.40.000783	33.06.40.000801
830	10318	86	33.06.40.000784	33.06.40.000802
	14965	129	33.06.40.000785	33.06.40.000803
1110	16825	142	33.06.40.000786	33.06.40.000804
	24594	218	33.06.40.000787	33.06.40.000805
4000 K				
400	3508	31	33.06.40.001174	33.06.40.001178
	4683	43	33.06.40.001175	33.06.40.001179
550	5580	48	33.06.40.000818	33.06.40.000836
	7938	70	33.06.40.000819	33.06.40.000837
830	10318	86	33.06.40.000820	33.06.40.000838
	14965	129	33.06.40.000821	33.06.40.000839
1110	16825	142	33.06.40.000822	33.06.40.000840
	24594	218	33.06.40.000823	33.06.40.000841

MATT BLACK FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	3508	31	33.06.40.001160	33.06.40.001164
	4683	43	33.06.40.001161	33.06.40.001165
550	5580	48	33.06.40.000794	33.06.40.000812
	7938	70	33.06.40.000795	33.06.40.000813
830	10318	86	33.06.40.000796	33.06.40.000814
	14965	129	33.06.40.000797	33.06.40.000815
1110	16825	142	33.06.40.000798	33.06.40.000816
	24594	218	33.06.40.000799	33.06.40.000817
4000 K				
400	3508	31	33.06.40.001176	33.06.40.001180
	4683	43	33.06.40.001177	33.06.40.001181
550	5580	48	33.06.40.000830	33.06.40.000848
	7938	70	33.06.40.000831	33.06.40.000849
830	10318	86	33.06.40.000832	33.06.40.000850
	14965	129	33.06.40.000833	33.06.40.000851
1110	16825	142	33.06.40.000834	33.06.40.000852
	24594	218	33.06.40.000835	33.06.40.000853

QUICK INFO

GENERAL

Suspended
IP40
650°C
Class I
Ta= -20°C +35°C

OPTIC

Micro Prismatic PMMA - UGR <19

LED

Efficacy up to 187 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI
Direct / Indirect - Simultaneous Control

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut
Direct / Indirect - Separate Control

CONTROL SYSTEM

Bluetooth

FINISHING

Other Colours


EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

Micro Prismatic Diffuser - UGR<19

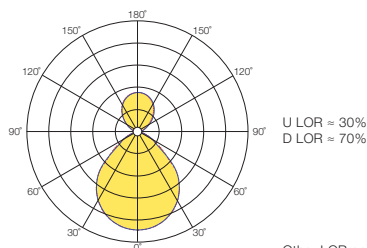

ASTRA 90 SUSPENDED - DIRECT & INDIRECT LIGHT MICRO PRISMATIC DIFFUSER - UGR <19

MATT WHITE FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	3598	31	33.06.40.001166	33.06.40.001170
	3597	43	33.06.40.001167	33.06.40.001171
550	5735	48	33.06.40.000854	33.06.40.000872
	8177	70	33.06.40.000855	33.06.40.000873
830	10556	86	33.06.40.000856	33.06.40.000874
	15302	129	33.06.40.000857	33.06.40.000875
1110	17504	142	33.06.40.000858	33.06.40.000876
	19531	218	33.06.40.000859	33.06.40.000877
4000 K				
400	3598	31	33.06.40.001182	33.06.40.001186
	3597	43	33.06.40.001183	33.06.40.001187
550	5735	48	33.06.40.000890	33.06.40.000908
	8177	70	33.06.40.000891	33.06.40.000909
830	10556	86	33.06.40.000892	33.06.40.000910
	15302	129	33.06.40.000893	33.06.40.000911
1110	17504	142	33.06.40.000894	33.06.40.000912
	19531	218	33.06.40.000895	33.06.40.000913

MATT BLACK FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	3598	31	33.06.40.001168	33.06.40.001172
	3597	43	33.06.40.001169	33.06.40.001173
550	5735	48	33.06.40.000866	33.06.40.000884
	8177	70	33.06.40.000867	33.06.40.000885
830	10556	86	33.06.40.000868	33.06.40.000886
	15302	129	33.06.40.000869	33.06.40.000887
1110	17504	142	33.06.40.000870	33.06.40.000888
	19531	218	33.06.40.000871	33.06.40.000889
4000 K				
400	3598	31	33.06.40.001184	33.06.40.001188
	3597	43	33.06.40.001185	33.06.40.001189
550	5735	48	33.06.40.000902	33.06.40.000920
	8177	70	33.06.40.000903	33.06.40.000921
830	10556	86	33.06.40.000904	33.06.40.000922
	15302	129	33.06.40.000905	33.06.40.000923
1110	17504	142	33.06.40.000906	33.06.40.000924
	19531	218	33.06.40.000907	33.06.40.000925

COMPONENTS**SUSPENSION SYSTEM****S1**

3 Points Suspension +
Recessed Ceiling Cup

S2

3 Points Suspension +
Surface Ceiling Cup

S3

1 Point Suspension +
Surface Ceiling Cup

ON/OFF

	1m	3m	5m
S1 - Matt White Ø80 mm	35.06.40.001634	35.06.40.002263	35.06.40.002266
S2 - Matt White Ø103x36 mm	35.06.40.001635	35.06.40.002264	35.06.40.002267
S3 - Matt White Ø120x30 mm	35.06.40.001636	35.06.40.002265	35.06.40.002268

DALI

	1m	3m	5m
S1 - Matt White Ø80 mm	35.06.40.002283	35.06.40.002284	35.06.40.002285
S2 - Matt White Ø103x36 mm	35.06.40.002286	35.06.40.002287	35.06.40.002288
S3 - Matt White Ø120x30 mm	35.06.40.002289	35.06.40.002290	35.06.40.002291



ASTRA 150

DIRECT & INDIRECT LIGHT

SUSPENDED



EN

- > Homogeneous lighting luminaire with 70% direct and 30% indirect light distribution.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Available in five standard diameters or customized up to 6 metres.
- > Magnetic clamping of the body to the luminaire base.
- > Opal Polycarbonate diffuser.
- > Single-piece seamless aluminium body without visible screws.
- > External finish in customer's chosen colour with white interior to maintain light uniformity and higher reflection coefficient.

FR

- > Luminaire à éclairage homogène et émission directe (70%) et indirecte (30%) du flux.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Disponible en cinq diamètres standard ou sur mesure jusqu'à 6 mètres.
- > Fixation magnétique du corps à la base du luminaire.
- > Diffuseur en Polycarbonate Opale.
- > Corps en aluminium d'une seule pièce sans vis apparentes.
- > Finition extérieure du luminaire dans la couleur choisie par le client avec intérieur toujours en blanc pour maintenir l'uniformité de la lumière et un haut coefficient de réflexion.

QUICK INFO**GENERAL**

Suspended
IP40
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 179 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI
Direct / Indirect - Simultaneous Control

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS**LED**

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut
Direct / Indirect - Separate Control

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours



SENSORS

Motion
Ambient Light
Motion & Ambient Light

**ASTRA 150 SUSPENDED - DIRECT & INDIRECT LIGHT
OPAL DIFFUSER****MATT WHITE FINISHING**

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	3341	33	33.06.40.400024	33.06.40.400028
	4535	50	33.06.40.400025	33.06.40.400029
650	5752	58	33.06.40.600024	33.06.40.600028
	7597	82	33.06.40.600025	33.06.40.600029
800	9833	93	33.06.40.800024	33.06.40.800028
	12306	133	33.06.40.800025	33.06.40.800029
1000	15235	142	33.06.40.100049	33.06.40.100053
	20276	203	33.06.40.100050	33.06.40.100054
1200	21876	204	33.06.40.120024	33.06.40.120028
	29215	293	33.06.40.120025	33.06.40.120029
4000 K				
400	3341	33	33.06.40.400026	33.06.40.400030
	4535	50	33.06.40.400027	33.06.40.400031
650	5752	58	33.06.40.600026	33.06.40.600030
	7597	82	33.06.40.600027	33.06.40.600031
800	9833	93	33.06.40.800026	33.06.40.800030
	12306	133	33.06.40.800027	33.06.40.800031
1000	15235	142	33.06.40.100051	33.06.40.100055
	20276	203	33.06.40.100052	33.06.40.100056
1200	21876	204	33.06.40.120026	33.06.40.120030
	29215	293	33.06.40.120027	33.06.40.120031

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.

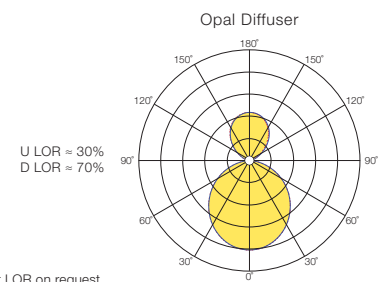DIRECT & INDIRECT LIGHT

QUICK INFO

GENERAL

Suspended
IP40
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 179 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI
Direct / Indirect - Simultaneous Control

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut
Direct / Indirect - Separate Control

CONTROL SYSTEM

Bluetooth

FINISHING


Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

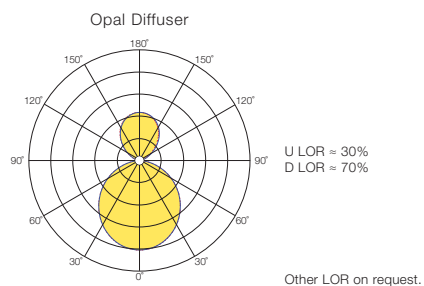ASTRA 150 SUSPENDED - DIRECT & INDIRECT LIGHT
OPAL DIFFUSER

MATT BLACK FINISHING


Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	3341	33	33.06.40.400032	33.06.40.400036
	4535	50	33.06.40.400033	33.06.40.400037
650	5752	58	33.06.40.600032	33.06.40.600036
	7597	82	33.06.40.600033	33.06.40.600037
800	9833	93	33.06.40.800032	33.06.40.800036
	12306	133	33.06.40.800033	33.06.40.800037
1000	15235	142	33.06.40.100057	33.06.40.100061
	20276	203	33.06.40.100058	33.06.40.100062
1200	21876	204	33.06.40.120032	33.06.40.120036
	29215	293	33.06.40.120033	33.06.40.120037
4000 K				
400	3341	33	33.06.40.400034	33.06.40.400038
	4535	50	33.06.40.400035	33.06.40.400039
650	5752	58	33.06.40.600034	33.06.40.600038
	7597	82	33.06.40.600035	33.06.40.600039
800	9833	93	33.06.40.800034	33.06.40.800038
	12306	133	33.06.40.800035	33.06.40.800039
1000	15235	142	33.06.40.100059	33.06.40.100063
	20276	203	33.06.40.100060	33.06.40.100064
1200	21876	204	33.06.40.120034	33.06.40.120038
	29215	293	33.06.40.120035	33.06.40.120039

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.

COMPONENTS


SUSPENSION SYSTEM

S1



3 pcs
3 Points Suspension +
Recessed Ceiling Cup

S2



3 pcs
3 Points Suspension +
Surface Ceiling Cup

S3



1 Point Suspension +
Surface Ceiling Cup

ON/OFF	1 m	3 m	5 m
S1 - White Ø80 mm	35.06.40.001634	35.06.40.002263	35.06.40.002266
S2 - White Ø103x36 mm	35.06.40.001635	35.06.40.002264	35.06.40.002267
S3 - White Ø120x30 mm	35.06.40.001636	35.06.40.002265	35.06.40.002268

DALI	1 m	3 m	5 m
S1 - White Ø80 mm	35.06.40.002283	35.06.40.002284	35.06.40.002285
S2 - White Ø103x36 mm	35.06.40.002286	35.06.40.002287	35.06.40.002288
S3 - White Ø120x30 mm	35.06.40.002289	35.06.40.002290	35.06.40.002291



> ASTRA 150 LD/LI SUSPENDED

ASTRA 90

SURFACE




EN

- > Homogeneous lighting surface mounted luminaire.
- > Available in four standard diameters or customized up to 6 metres.
- > Magnetic clamping of the body to the luminaire base.
- > Micro prismatic PMMA diffuser for glare control (UGR <19) or Opal Polycarbonate diffuser.
- > Single-piece seamless aluminium body without visible screws.
- > External finish in customer's chosen colour with white interior to maintain light uniformity and higher reflection coefficient.

FR

- > Luminaire à éclairage homogène pour une application apparente.
- > Disponible en quatre diamètres standard ou sur mesure jusqu'à 6 mètres.
- > Fixation magnétique du corps à la base du luminaire.
- > Diffuseur en PMMA Microprismatique pour contrôle de l'éblouissement (UGR <19) ou diffuseur Polycarbonate Opale.
- > Corps en aluminium d'une seule pièce sans vis apparentes.
- > Finition extérieure du luminaire dans la couleur choisie par le client avec intérieur toujours en blanc pour maintenir l'uniformité de la lumière et un haut coefficient de réflexion.



QUICK INFO

GENERAL

Surface
IP40
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 187 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L80/B10 @TC=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

ASTRA 90 SURFACE


OPAL DIFFUSER

MATT WHITE FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	2020	18	33.06.30.000401	33.06.30.000405
	2818	26	33.06.30.000402	33.06.30.000412
550	3498	30	33.06.30.000208	33.06.30.000280
	5358	47	33.06.30.000209	33.06.30.000281
830	7228	59	33.06.30.000210	33.06.30.000282
	11138	94	33.06.30.000211	33.06.30.000283
1110	12808	107	33.06.30.000212	33.06.30.000284
	19619	172	33.06.30.000213	33.06.30.000285
4000 K				
400	2020	18	33.06.30.000379	33.06.30.000383
	2818	26	33.06.30.000380	33.06.30.000384
550	3498	30	33.06.30.000226	33.06.30.000298
	5358	47	33.06.30.000227	33.06.30.000299
830	7228	59	33.06.30.000228	33.06.30.000300
	11138	94	33.06.30.000229	33.06.30.000301
1110	12808	107	33.06.30.000230	33.06.30.000302
	19619	172	33.06.30.000231	33.06.30.000303

MATT BLACK FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	2020	18	33.06.30.000403	33.06.30.000413
	2818	26	33.06.30.000404	33.06.30.000414
550	3498	30	33.06.30.000220	33.06.30.000292
	5358	47	33.06.30.000221	33.06.30.000293
830	7228	59	33.06.30.000222	33.06.30.000294
	11138	94	33.06.30.000223	33.06.30.000295
1110	12808	107	33.06.30.000224	33.06.30.000296
	19619	172	33.06.30.000225	33.06.30.000297
4000 K				
400	2020	18	33.06.30.000381	33.06.30.000385
	2818	26	33.06.30.000382	33.06.30.000386
550	3498	30	33.06.30.000238	33.06.30.000310
	5358	47	33.06.30.000239	33.06.30.000311
830	7228	59	33.06.30.000240	33.06.30.000312
	11138	94	33.06.30.000241	33.06.30.000313
1110	12808	107	33.06.30.000242	33.06.30.000314
	19619	172	33.06.30.000243	33.06.30.000315



QUICK INFO

GENERAL

Surface
IP40
650°C
Class I
Ta= -20°C +35°C

OPTIC

Micro Prismatic PMMA - UGR <19

LED

Efficacy up to 187 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

ASTRA 90 SURFACE

MICRO PRISMATIC DIFFUSER - UGR <19


MATT WHITE FINISHING


Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	2110	18	33.06.30.000365	33.06.30.000369
	2943	26	33.06.30.000366	33.06.30.000376
550	3654	30	33.06.30.000244	33.06.30.000316
	5597	47	33.06.30.000245	33.06.30.000317
830	7467	59	33.06.30.000246	33.06.30.000318
	11476	94	33.06.30.000247	33.06.30.000319
1110	13487	107	33.06.30.000248	33.06.30.000320
	20659	172	33.06.30.000249	33.06.30.000321
4000 K				
400	2110	18	33.06.30.000387	33.06.30.000397
	2943	26	33.06.30.000394	33.06.30.000398
550	3654	30	33.06.30.000262	33.06.30.000334
	5597	47	33.06.30.000263	33.06.30.000335
830	7467	59	33.06.30.000264	33.06.30.000336
	11476	94	33.06.30.000265	33.06.30.000337
1110	13487	107	33.06.30.000266	33.06.30.000338
	20659	172	33.06.30.000267	33.06.30.000339

MATT BLACK FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	2110	18	33.06.30.000367	33.06.30.000377
	2943	26	33.06.30.000368	33.06.30.000378
550	3654	30	33.06.30.000256	33.06.30.000328
	5597	47	33.06.30.000257	33.06.30.000329
830	7467	59	33.06.30.000258	33.06.30.000330
	11476	94	33.06.30.000259	33.06.30.000331
1110	13487	107	33.06.30.000260	33.06.30.000332
	20659	172	33.06.30.000261	33.06.30.000333
4000 K				
400	2110	18	33.06.30.000395	33.06.30.000399
	2943	26	33.06.30.000396	33.06.30.000400
550	3654	30	33.06.30.000274	33.06.30.000346
	5597	47	33.06.30.000275	33.06.30.000347
830	7467	59	33.06.30.000276	33.06.30.000348
	11476	94	33.06.30.000277	33.06.30.000349
1110	13487	107	33.06.30.000278	33.06.30.000350
	20659	172	33.06.30.000279	33.06.30.000351

Micro Prismatic Diffuser - UGR<19



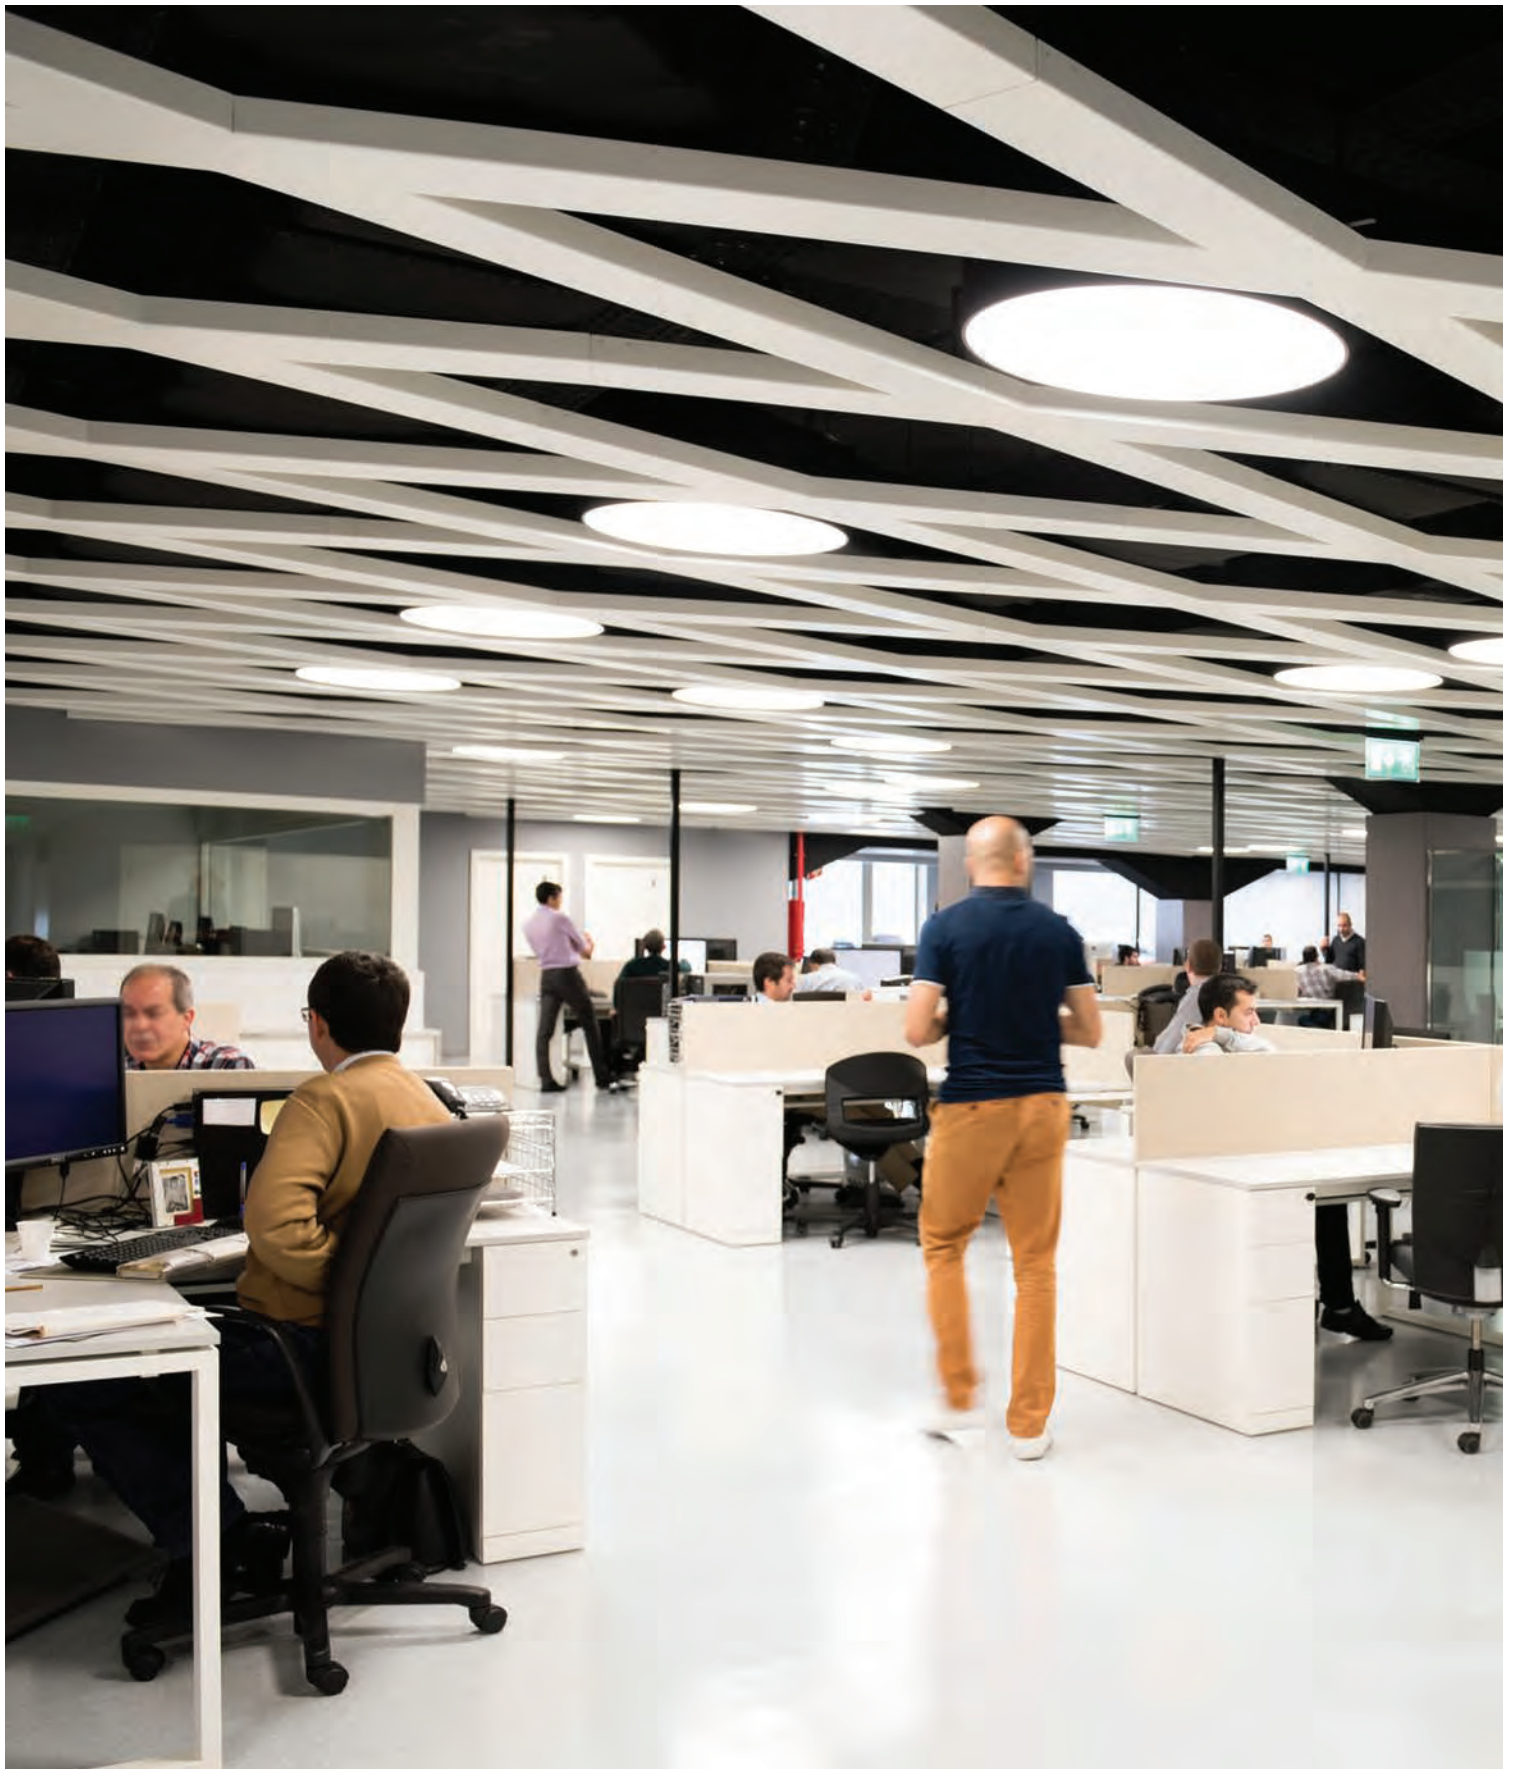

ASTRA 150

SURFACE



EN

- > Homogeneous lighting luminaire with direct light emission.
- > Surface-mounted luminaire.
- > Available in five standard diameters or customized up to 6 metres.
- > Magnetic clamping of the body to the luminaire base.
- > Opal Polycarbonate diffuser.
- > Single-piece seamless aluminium body without visible screws.
- > External finish in customer's chosen colour with white interior to maintain light uniformity and higher reflection coefficient.

FR

- > Luminaire d'éclairage homogène à émission directe du flux lumineux.
- > Pour application apparente.
- > Disponible en cinq diamètres standard ou sur mesure jusqu'à 6 mètres.
- > Fixation magnétique du corps à la base du luminaire.
- > Diffuseur en Polycarbonate Opale.
- > Corps en aluminium d'une seule pièce sans vis apparentes.
- > Finition extérieure du luminaire dans la couleur choisie par le client avec intérieur toujours en blanc pour maintenir l'uniformité de la lumière et un haut coefficient de réflexion.

QUICK INFO

GENERAL

Surface
IP40
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 179 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light



ASTRA 150 SURFACE

OPAL DIFFUSER

MATT WHITE FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	1853	20	33.06.30.400000	33.06.30.400004
	2670	32	33.06.30.400001	33.06.30.400005
650	3763	40	33.06.30.600000	33.06.30.600004
	5111	59	33.06.30.600001	33.06.30.600005
800	6882	67	33.06.30.800000	33.06.30.800004
	9356	99	33.06.30.800001	33.06.30.800005
1000	11388	107	33.06.30.100001	33.06.30.100005
	15480	158	33.06.30.100002	33.06.30.100006
1200	17080	160	33.06.30.120000	33.06.30.120004
	23221	235	33.06.30.120001	33.06.30.120005
4000 K				
400	1853	20	33.06.30.400002	33.06.30.400006
	2670	32	33.06.30.400003	33.06.30.400007
650	3763	40	33.06.30.600002	33.06.30.600006
	5111	59	33.06.30.600003	33.06.30.600007
800	6882	67	33.06.30.800002	33.06.30.800006
	9356	99	33.06.30.800003	33.06.30.800007
1000	11388	107	33.06.30.100003	33.06.30.100007
	15480	158	33.06.30.100004	33.06.30.100008
1200	17080	160	33.06.30.120002	33.06.30.120006
	23221	235	33.06.30.120003	33.06.30.120007

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.



QUICK INFO

GENERAL

Surface
IP40
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 179 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light


ASTRA 150 SURFACE

OPAL DIFFUSER

MATT BLACK FINISHING

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	1853	20	33.06.30.400008	33.06.30.400012
	2670	32	33.06.30.400009	33.06.30.400013
650	3763	40	33.06.30.600008	33.06.30.600012
	5111	59	33.06.30.600009	33.06.30.600013
800	6882	67	33.06.30.800008	33.06.30.800012
	9356	99	33.06.30.800009	33.06.30.800013
1000	11388	107	33.06.30.100009	33.06.30.100013
	15480	158	33.06.30.100010	33.06.30.100014
1200	17080	160	33.06.30.120008	33.06.30.120012
	23221	235	33.06.30.120009	33.06.30.120013
4000 K				
400	1853	20	33.06.30.400010	33.06.30.400014
	2670	32	33.06.30.400011	33.06.30.400015
650	3763	40	33.06.30.600010	33.06.30.600014
	5111	59	33.06.30.600011	33.06.30.600015
800	6882	67	33.06.30.800010	33.06.30.800014
	9356	99	33.06.30.800011	33.06.30.800015
1000	11388	107	33.06.30.100011	33.06.30.100015
	15480	158	33.06.30.100012	33.06.30.100016
1200	17080	160	33.06.30.120010	33.06.30.120014
	23221	235	33.06.30.120011	33.06.30.120015

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.





ASTRA
TRIMLESS





THIS IS
MY TRYP

我在TRYP里斯本

Je suis en TRYP à LISBONA

Eu estou no TRYP

I'm in TRYP

Yo estoy en TRYP en LISB

ASTRA 90

TRIMLESS




EN

- > Homogeneous lighting trimless recessed mounted luminaire.
- > For ceiling integration with minimal visual impact in plasterboard false ceilings.
- > Available in four standard diameters or customized up to 6 metres.
- > Micro prismatic PMMA diffuser for glare control (UGR <19) or Opal Polycarbonate diffuser.
- > Aluminium body.

FR

- > Luminaire à éclairage homogène pour application encastrée sans cadre (trimless).
- > Pour intégration avec un impact visuel minimale dans les faux plafonds en plaques de plâtre.
- > Disponible en quatre diamètres standard ou sur mesure jusqu'à 6 mètres.
- > Diffuseur en PMMA Microprismatique pour contrôle de l'éblouissement (UGR <19) ou diffuseur Polycarbonate Opale.
- > Corps en aluminium.



QUICK INFO

GENERAL

Trimless
 IP23 (Optic)
 IP20
 850°C - Opal
 650°C - Micro Prismatic PMMA
 Class I
 Ta= -20°C +35°C

OPTIC

Opal Polycarbonate
 Micro Prismatic PMMA - UGR <19

LED

Efficacy up to 187 lm/W
 3000 K, 4000 K
 CRI >80
 Lifetime 50 000 H
 L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
 ON/OFF, DALI

FINISHING

RAL 9003 Matt White

ASTRA 90 TRIMLESS

OPAL DIFFUSER

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	2020	18	33.06.30.000415	33.06.30.000417
	2818	26	33.06.30.000416	33.06.30.000418
550	3498	30	33.06.30.000352	33.06.30.000424
	5358	47	33.06.30.000353	33.06.30.000425
830	7228	59	33.06.30.000354	33.06.30.000426
	11138	94	33.06.30.000355	33.06.30.000427
1110	12828	107	33.06.30.000356	33.06.30.000428
	19619	172	33.06.30.000357	33.06.30.000429
4000 K				
400	2020	18	33.06.30.000423	33.06.30.000431
	2818	26	33.06.30.000430	33.06.30.000432
550	3498	30	33.06.30.000370	33.06.30.000442
	5358	47	33.06.30.000371	33.06.30.000443
830	7228	59	33.06.30.000372	33.06.30.000444
	11138	94	33.06.30.000373	33.06.30.000445
1110	12828	107	33.06.30.000374	33.06.30.000446
	19619	172	33.06.30.000375	33.06.30.000447

OPTIONS

LED

2700 K, 5000 K, 6500 K
 Tunable White, RGB, RGBW
 CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

EMERGENCY


1 Hour, 3 Hours
 DALI 1 Hour, 3 Hours

SENSORS

Motion
 Ambient Light
 Motion & Ambient Light

MICRO PRISMATIC DIFFUSER - UGR <19

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	2110	18	33.06.30.000419	33.06.30.000421
	2943	26	33.06.30.000420	33.06.30.000422
550	3654	30	33.06.30.000388	33.06.30.000460
	5597	47	33.06.30.000389	33.06.30.000461
830	7467	59	33.06.30.000390	33.06.30.000462
	11476	94	33.06.30.000391	33.06.30.000463
1110	13487	107	33.06.30.000392	33.06.30.000464
	20659	172	33.06.30.000393	33.06.30.000465
4000 K				
400	2110	18	33.06.30.000433	33.06.30.000435
	2943	26	33.06.30.000434	33.06.30.000436
550	3654	30	33.06.30.000406	33.06.30.000478
	5597	47	33.06.30.000407	33.06.30.000479
830	7467	59	33.06.30.000408	33.06.30.000480
	11476	94	33.06.30.000409	33.06.30.000481
1110	13487	107	33.06.30.000410	33.06.30.000482
	20659	172	33.06.30.000411	33.06.30.000483

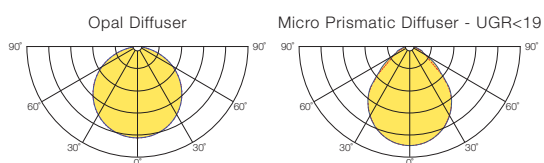

ASTRA 150

TRIMLESS



EN

- > Perfectly homogeneous lighting trimless recessed mounted luminaire.
- > For ceiling integration with minimal visual impact in plasterboard false ceilings.
- > Available in five standard diameters or customized up to 6 metres.
- > Opal Polycarbonate diffuser.
- > Aluminium body.

FR

- > Luminaire à éclairage parfaitement homogène pour application encastrée sans cadre (trimless).
- > Pour intégration avec un impact visuel minimale dans les faux plafonds en plaques de plâtre.
- > Disponible en cinq diamètres standard ou sur mesure jusqu'à 6 mètres.
- > Diffuseur en Polycarbonate Opale.
- > Corps en aluminium.

QUICK INFO

GENERAL

Trimless
IP23 (Optic)
IP20
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 179 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS



Motion
Ambient Light
Motion & Ambient Light

ASTRA 150 TRIMLESS

OPAL DIFFUSER

Ø (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
400	1853	20	33.06.30.000110	33.06.30.000114
	2670	32	33.06.30.000111	33.06.30.000115
650	3763	40	33.06.30.000118	33.06.30.000122
	5111	59	33.06.30.000119	33.06.30.000123
800	6882	67	33.06.30.000126	33.06.30.000130
	9356	99	33.06.30.000127	33.06.30.000131
1000	11388	107	33.06.30.000134	33.06.30.000138
	15480	158	33.06.30.000135	33.06.30.000139
1200	17080	160	33.06.30.000142	33.06.30.000146
	23221	235	33.06.30.000143	33.06.30.000147
4000 K				
400	1853	20	33.06.30.000112	33.06.30.000116
	2670	32	33.06.30.000113	33.06.30.000117
650	3763	40	33.06.30.000120	33.06.30.000124
	5111	59	33.06.30.000121	33.06.30.000125
800	6882	67	33.06.30.000128	33.06.30.000132
	9356	99	33.06.30.000129	33.06.30.000133
1000	11388	107	33.06.30.000136	33.06.30.000140
	15480	158	33.06.30.000137	33.06.30.000141
1200	17080	160	33.06.30.000144	33.06.30.000148
	23221	235	33.06.30.000145	33.06.30.000149

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.



TUPOLI
SUSPENDED





TUPOLI 38

SUSPENDED



EN

- > Homogeneous lighting luminaire with 300° light emission.
- > Suspended luminaire on false ceiling through stainless steel suspension with tool-less height adjustment.
- > Tubular design with 38 mm diameter.
- > Can be used as single luminaire or in clusters of several units powered from a single Driver.
- > External class II constant voltage Driver.
- > Opal PMMA tubular diffuser.
- > White opaque acrylic end caps.

FR

- > Luminaire d'éclairage homogène avec diffusion de lumière sur 300°.
- > Application suspendue en faux plafond par câble en acier inoxydable avec réglage en hauteur sans outil.
- > Forme tubulaire avec 38 mm de diamètre.
- > Peut être utilisé comme luminaire individuel ou en groupes de luminaires alimentées à partir d'un seul Driver.
- > Driver externe à tension constante et classe de protection II.
- > Diffuseur tubulaire en PMMA Opale.
- > Embouts en acrylique opaque blanc.

QUICK INFO

GENERAL

Suspended
IP40
IK04
650°C
Class III
Ta= -20°C +35°C

OPTIC

Opal PMMA

LED

Efficacy up to 122 lm/W
3000 K, 4200 K
CRI >80
Lifetime 30 000 H
L70/B10 @Tc=25°C
24 VDC

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

SENSORS

Motion
Ambient Light
Motion & Ambient Light

TUPOLI 38 SUSPENDED

OPAL DIFFUSER

c (mm)	Output (lm)	LED Power (W)	LED Voltage	COD
3000 K				
994	1153	12	24 VDC	33.49.005.08.73
1500	1730	18	24 VDC	33.49.005.08.74
2000	2307	24	24 VDC	33.49.005.08.75
4200 K				
994	1203	12	24 VDC	33.49.005.08.76
1500	1805	18	24 VDC	33.49.005.08.77
2000	2405	24	24 VDC	33.49.005.08.78

COMPONENTS

SUSPENSION SYSTEM (1pc)



TYPE	1m	3m
Matt White	35.49.002.08.80	35.49.002.08.81

RECESSED CEILING CUP (1pc)



TYPE	1m	3m
Matt White Ø80 mm	35.49.002.08.78	35.49.002.08.79



DRIVER - EXTERNAL



CLASS II

ON/OFF	DIMENSION	COD
Power Supply 4-32W IP20	21x40x220 mm	35.00.003.01.75
Power Supply 6-49W IP20	21x40x250 mm	35.00.003.01.74
Power Supply 12-86W IP20	21x40x300 mm	35.00.003.01.73
DALI	DIMENSION	COD
Power Supply 12-90W IP20	30x43x295 mm	35.00.003.01.76
Power Supply 18-135W IP20	31x43x325 mm	35.00.003.01.77

> External Driver to be housed nearby.

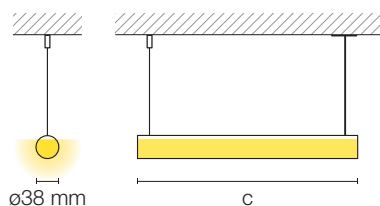

TUPOLI 38

SURFACE



EN

- > Homogeneous lighting luminaire with 300° light emission.
- > Surface mounted luminaire on false ceiling through polycarbonate mounting brackets.
- > Tubular design with 38 mm diameter.
- > Can be used as single luminaire or in clusters of several units powered from a single Driver.
- > External class II constant voltage Driver.
- > Opal PMMA tubular diffuser.
- > White opaque acrylic end caps.

FR

- > Luminaire d'éclairage homogène avec diffusion de lumière sur 300°.
- > Application apparente en faux plafond par pattes de fixation en polycarbonate.
- > Forme tubulaire avec 38 mm de diamètre.
- > Peut être utilisé comme luminaire individuel ou en groupes de luminaires alimentées à partir d'un seul Driver.
- > Driver externe à tension constante et classe de protection II.
- > Diffuseur tubulaire en PMMA Opale.
- > Embouts en acrylique opaque blanc.

QUICK INFO

GENERAL

Surface
IP40
IK04
650°C
Class III
Ta= -20°C +35°C

OPTIC

Opal PMMA

LED

Efficacy up to 122 lm/W
3000 K, 4200 K
CRI >80
Lifetime 30 000 H
L70/B10 @Tc=25°C
24 VDC

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

SENSORS

Motion
Ambient Light
Motion & Ambient Light

TUPOLI 38 SURFACE

OPAL DIFFUSER

c (mm)	Output (lm)	LED Power (W)	LED Voltage	COD
3000 K				
994	1153	12	24 VDC	33.49.002.08.12
1500	1730	18	24 VDC	33.49.002.08.13
2000	2307	24	24 VDC	33.49.002.08.14
4200 K				
994	1203	12	24 VDC	33.49.002.08.15
1500	1805	18	24 VDC	33.49.002.08.16
2000	2405	24	24 VDC	33.49.002.08.17

COMPONENTS

SURFACE MOUNTING SYSTEM (2pcs)

TYPE	COD
Polycarbonate Mounting Brackets	35.49.001.08.29



RECESSED CEILING CUP (1pc)

TYPE	COD
Matt White Ø80 mm	35.49.001.08.55

DRIVER - EXTERNAL


ON/OFF	DIMENSION	COD
Power Supply 4-32W IP20	21x40x220 mm	35.00.003.01.75
Power Supply 6-49W IP20	21x40x250 mm	35.00.003.01.74
Power Supply 12-86W IP20	21x40x300 mm	35.00.003.01.73
DALI	DIMENSION	COD
Power Supply 12-90W IP20	30x43x295 mm	35.00.003.01.76
Power Supply 18-135W IP20	31x43x325 mm	35.00.003.01.77

> External Driver to be housed nearby.



TUPOLI 55

SUSPENDED

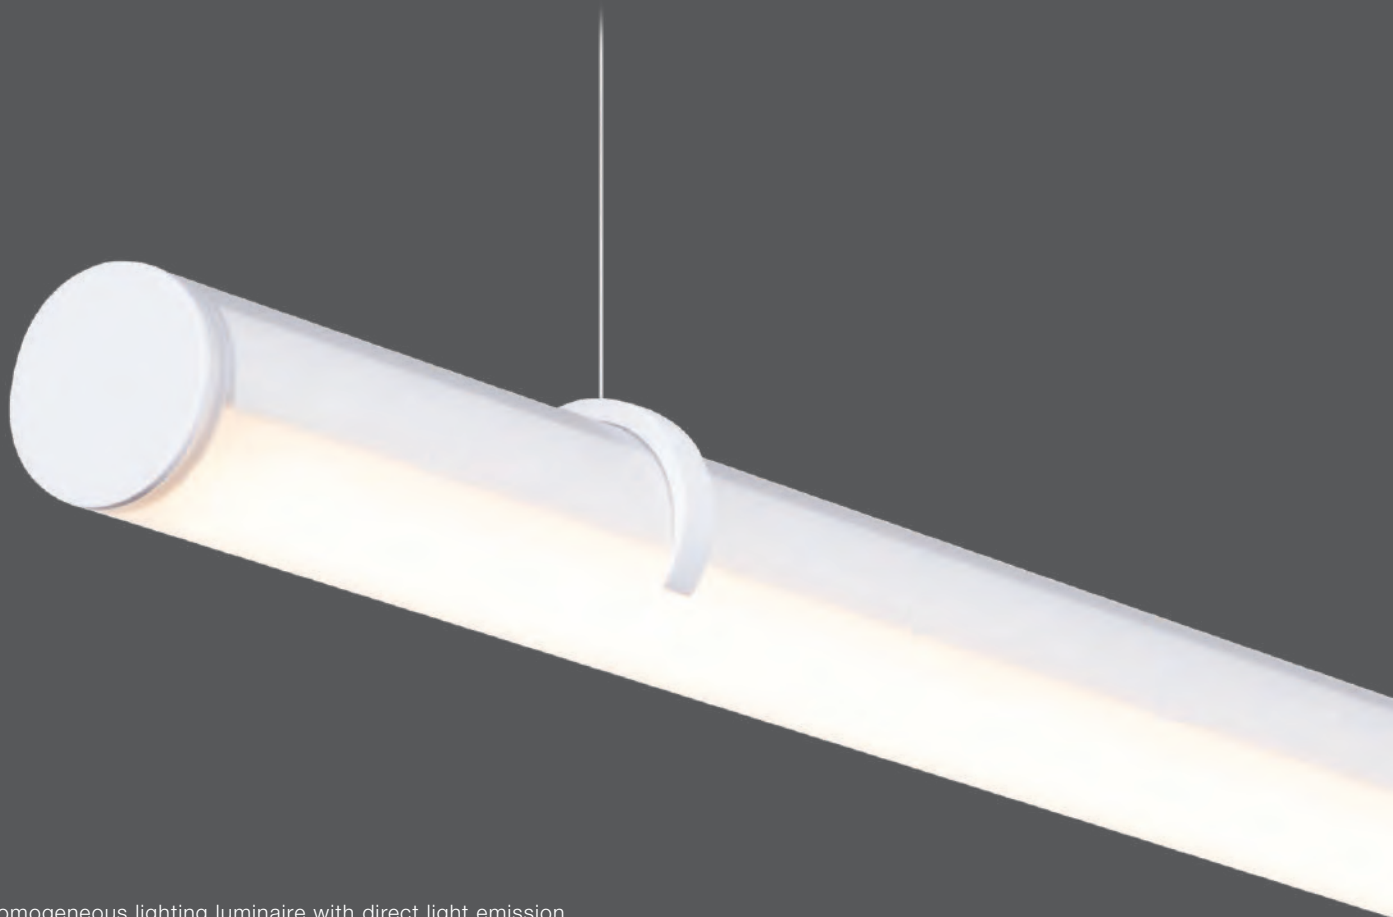

EN

- > Homogeneous lighting luminaire with direct light emission.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Opal Polycarbonate tubular diffuser.
- > Inner aluminium reflector to increase the luminaire performance.
- > Matt white powder coated aluminium end caps.

FR

- > Luminaire d'éclairage homogène à émission directe du flux lumineux.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Diffuseur tubulaire en Polycarbonate Opale.
- > Réflecteur interne en aluminium pour une performance accrue du luminaire.
- > Embouts en aluminium finition blanc mat.

QUICK INFO

GENERAL

Suspended
IP40
IK08
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 188 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=55°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS



Motion
Ambient Light
Motion & Ambient Light

TUPOLI 55 SUSPENDED

OPAL DIFFUSER

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
900	2323	19	33.49.003.08.14	33.49.003.08.23
1181	2287	18	33.49.003.08.15	33.49.003.08.24
	3096	26	33.49.003.08.16	33.49.003.08.25
1462	2858	23	33.49.003.08.17	33.49.003.08.26
	3871	32	33.49.003.08.18	33.49.003.08.27
2305	4574	36	33.49.003.08.19	33.49.003.08.28
	6193	52	33.49.003.08.20	33.49.003.08.29
2867	5716	45	33.49.003.08.21	33.49.003.08.30
	7742	64	33.49.003.08.22	33.49.003.08.31
4000 K				
900	2431	19	33.49.002.08.96	33.49.003.08.05
1181	2393	18	33.49.002.08.97	33.49.003.08.06
	3241	26	33.49.002.08.98	33.49.003.08.07
1462	2991	23	33.49.002.08.99	33.49.003.08.08
	4052	32	33.49.003.08.00	33.49.003.08.09
2305	4786	36	33.49.003.08.01	33.49.003.08.10
	6482	52	33.49.003.08.02	33.49.003.08.11
2867	5981	45	33.49.003.08.03	33.49.003.08.12
	8103	64	33.49.003.08.04	33.49.003.08.13

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.

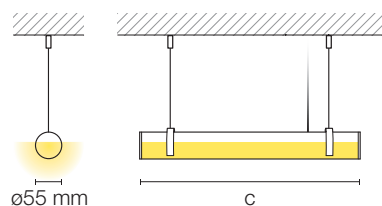

TUPOLI 55

SUSPENDED

COMPONENTS



SUSPENSION SYSTEM (2pcs)

TYPE	1m	3m	5m
Matt White + Stainless Steel Cable	35.49.001.08.32	35.49.001.08.33	35.49.002.08.75



SURFACE CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø62x36 mm	35.49.001.08.30	35.49.002.08.59	35.49.002.08.67
ON/OFF + EM	Ø62x36 mm	35.49.001.08.46	35.49.002.08.60	35.49.002.08.68
DALI	Ø62x36 mm	35.49.001.08.47	35.49.002.08.61	35.49.002.08.69
DALI + EM	Ø103x36 mm	35.49.001.08.48	35.49.002.08.62	35.49.002.08.70



RECESSED CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø80 mm	35.49.001.08.31	35.49.002.08.63	35.49.002.08.71
ON/OFF + EM	Ø80 mm	35.49.001.08.49	35.49.002.08.64	35.49.002.08.72
DALI	Ø80 mm	35.49.001.08.50	35.49.002.08.65	35.49.002.08.73
DALI + EM	Ø80 mm	35.49.001.08.51	35.49.002.08.66	35.49.002.08.74

OPTIONS



EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF	COD
EM 1H 3W	35.00.003.01.23*
DALI	COD
EM 1H 5,4W DALI	35.00.004.01.54*


* Applies to lengths equal to or greater than 1181 mm.

> On request – External Emergency. Box dimensions: 45x120x360 mm.



TUPOLI 70

SUSPENDED

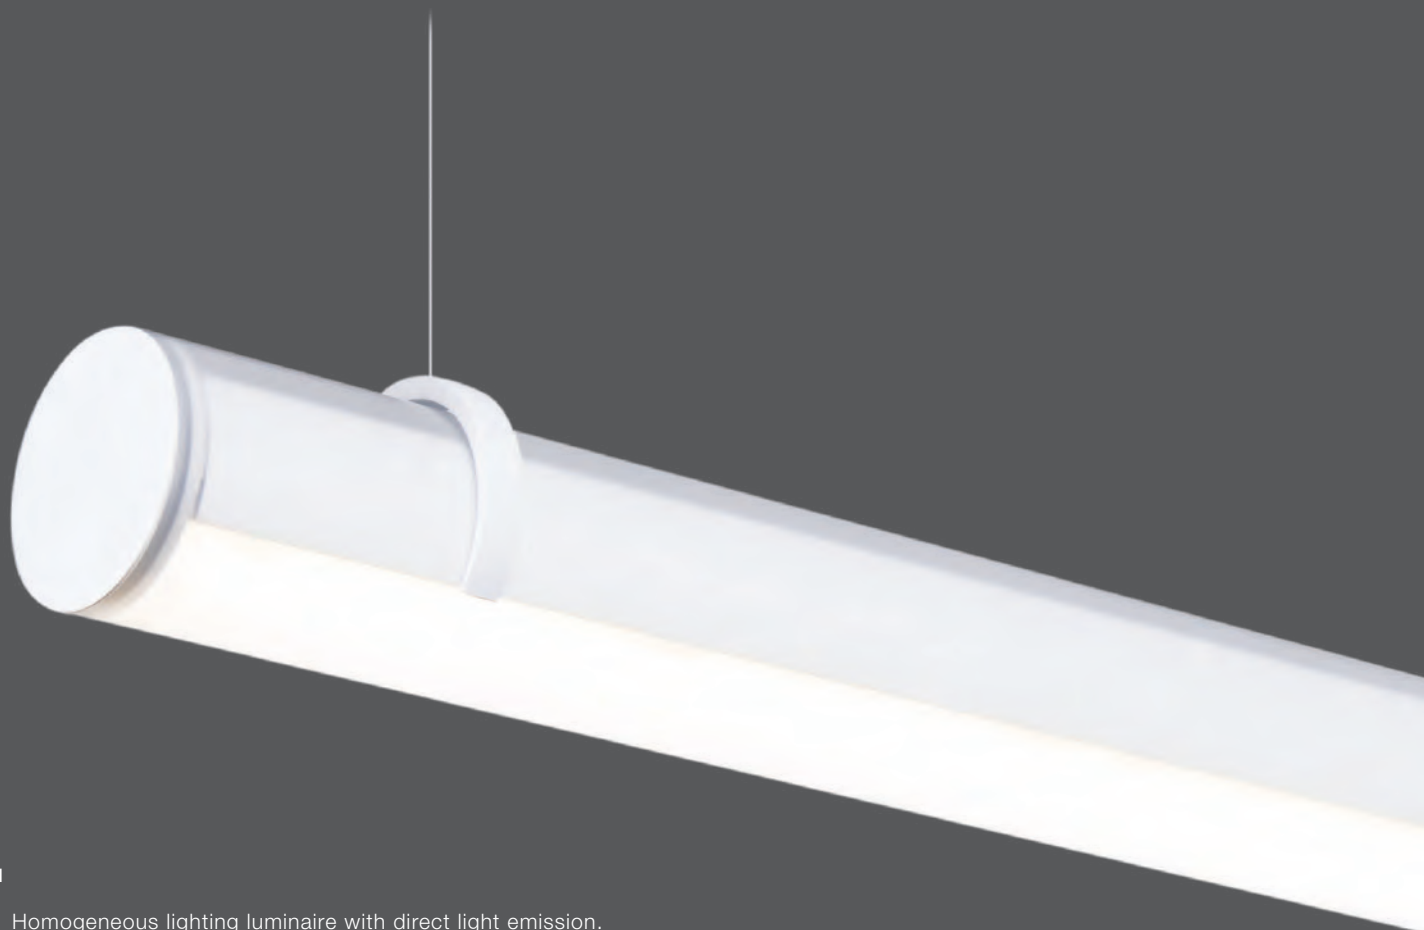

EN

- > Homogeneous lighting luminaire with direct light emission.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Opal Polycarbonate tubular diffuser.
- > Inner aluminium reflector to increase the luminaire performance.
- > Matt white powder coated aluminium end caps.

FR

- > Luminaire d'éclairage homogène à émission directe du flux lumineux.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Diffuseur tubulaire en Polycarbonate Opale.
- > Réflecteur interne en aluminium pour une performance accrue du luminaire.
- > Embouts en aluminium finition blanc mat.

QUICK INFO

GENERAL

Suspended
IP40
IK08
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 193 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS



Motion
Ambient Light
Motion & Ambient Light

TUPOLI 70 SUSPENDED

OPAL DIFFUSER

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
900	1880	14	33.49.005.08.18	33.49.005.08.19
	2705	22	33.49.003.08.32	33.49.003.08.41
	4440	38	33.49.006.08.92	33.49.006.08.97
1181	2506	19	33.49.003.08.33	33.49.003.08.42
	3607	29	33.49.003.08.34	33.49.003.08.43
	5919	51	33.49.006.08.93	33.49.006.08.98
1462	3133	24	33.49.003.08.35	33.49.003.08.44
	4509	37	33.49.003.08.36	33.49.003.08.45
	7399	63	33.49.006.08.94	33.49.006.08.99
2305	5013	38	33.49.003.08.37	33.49.003.08.46
	7213	58	33.49.003.08.38	33.49.003.08.47
	11839	101	33.49.006.08.95	33.49.007.08.00
2867	6266	48	33.49.003.08.39	33.49.003.08.48
	9018	73	33.49.003.08.40	33.49.003.08.49
	14798	127	33.49.006.08.96	33.49.007.08.01
4000 K				
900	1967	14	33.49.005.08.20	33.49.005.08.21
	2831	22	33.49.003.08.50	33.49.003.08.59
	4652	38	33.49.007.08.02	33.49.007.08.07
1181	2623	19	33.49.003.08.51	33.49.003.08.60
	3774	29	33.49.003.08.52	33.49.003.08.61
	6203	51	33.49.007.08.03	33.49.007.08.08
1462	3278	24	33.49.003.08.53	33.49.003.08.62
	4717	37	33.49.003.08.54	33.49.003.08.63
	7753	63	33.49.007.08.04	33.49.007.08.09
2305	5246	38	33.49.003.08.55	33.49.003.08.64
	7547	58	33.49.003.08.56	33.49.003.08.65
	12406	101	33.49.007.08.05	33.49.007.08.10
2867	6557	48	33.49.003.08.57	33.49.003.08.66
	9435	73	33.49.003.08.58	33.49.003.08.67
	15507	127	33.49.007.08.06	33.49.007.08.11

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.

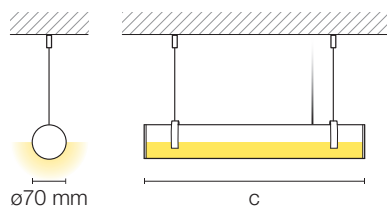

TUPOLI 70

SUSPENDED

COMPONENTS



SUSPENSION SYSTEM (2pcs)

TYPE	1m	3m	5m
Matt White + Stainless Steel Cable	35.49.003.01.48	35.49.003.01.49	35.49.002.08.76



SURFACE CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø62x36 mm	35.49.001.08.30	35.49.002.08.59	35.49.002.08.67
ON/OFF + EM	Ø62x36 mm	35.49.001.08.46	35.49.002.08.60	35.49.002.08.68
DALI	Ø62x36 mm	35.49.001.08.47	35.49.002.08.61	35.49.002.08.69
DALI + EM	Ø103x36 mm	35.49.001.08.48	35.49.002.08.62	35.49.002.08.70



RECESSED CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø80 mm	35.49.001.08.31	35.49.002.08.63	35.49.002.08.71
ON/OFF + EM	Ø80 mm	35.49.001.08.49	35.49.002.08.64	35.49.002.08.72
DALI	Ø80 mm	35.49.001.08.50	35.49.002.08.65	35.49.002.08.73
DALI + EM	Ø80 mm	35.49.001.08.51	35.49.002.08.66	35.49.002.08.74

OPTIONS



EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF	COD
EM 1H 3W	35.00.003.01.23*
EM 3H 3W	35.00.003.01.24**
DALI	COD
EM 1H 5,4W DALI	35.00.004.01.54*
EM 3H 5,4W DALI	35.00.004.01.55**

* Applies to lengths equal to or greater than 1181 mm. ** Applies to lengths equal to or greater than 1462 mm.
 > On request – External Emergency. Box dimensions: 45x120x360 mm.



TUPOLI 70 I-LIGHT

INVISIBLE LIGHT - UGR <13

SUSPENDED



EN

- > Invisible light luminaire with outstanding glare control.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > The light source is invisible, offering high visual comfort with UGR <13 for maximum glare protection.
- > The integrated lens optics allow beam angles of 16°, 40° and 35°x12° (elliptical).
- > Clear impact-resistant polycarbonate tubular body.
- > Aluminium end caps.

FR

- > Luminaire de lumière invisible offrant un contrôle exceptionnelle de l'éblouissement.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > La source de lumière est invisible, offrant un grand confort visuel avec UGR <13 pour une protection anti-éblouissement maximale.
- > L'optique de lentille intégrée permet des angles de diffusion de 16°, 40° et 35°x12° (elliptique).
- > Corps tubulaire en polycarbonate transparent résistante aux chocs.
- > Embouts en aluminium.

QUICK INFO

GENERAL

Suspended
IP40
IK08
850°C
Class I
Ta= -20°C +35°C

OPTIC

Clear Polycarbonate

LED

Efficacy up to 143 lm/W
3000 K, 4000 K
CRI >90
Lifetime 80 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9005 Matt Black

TUPOLI 70 I-LIGHT SUSPENDED
CLEAR DIFFUSER

MATT BLACK FINISHING

Beam Angle (°)	c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K					
16°	1176	3560	28	33.49.006.08.47	33.49.006.08.53
	1459	4450	35	33.49.006.08.50	33.49.006.08.56
40°	1176	3591	28	33.49.006.08.48	33.49.006.08.54
	1459	4488	35	33.49.006.08.51	33.49.006.08.57
Elliptical 35° x 12°	1176	3348	28	33.49.006.08.49	33.49.006.08.55
	1459	4185	35	33.49.006.08.52	33.49.006.08.58
4000 K					
16°	1176	3615	28	33.49.006.08.59	33.49.006.08.65
	1459	4518	35	33.49.006.08.62	33.49.006.08.68
40°	1176	3646	28	33.49.006.08.60	33.49.006.08.66
	1459	4557	35	33.49.006.08.63	33.49.006.08.69
Elliptical 35° x 12°	1176	3399	28	33.49.006.08.61	33.49.006.08.67
	1459	4249	35	33.49.006.08.64	33.49.006.08.70

OPTIONS

LED

2700 K, 5000 K, 6500 K

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING



 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

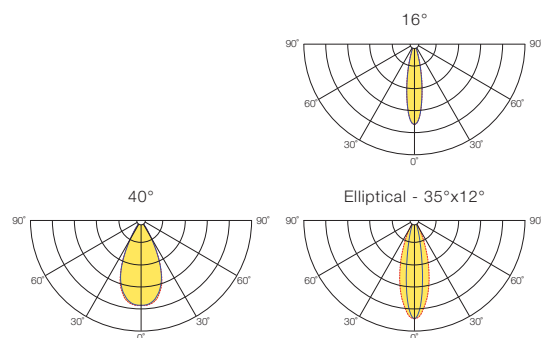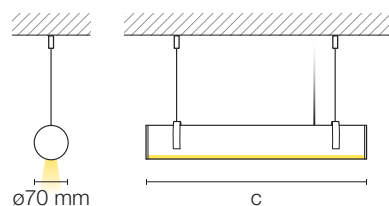

TUPOLI 70 I-LIGHT

SUSPENDED

COMPONENTS



SUSPENSION SYSTEM (2pcs)

TYPE	1m	3m	5m
Matt Black + Stainless Steel Cable	35.49.002.08.97	35.49.002.08.98	35.49.002.08.99



SURFACE CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø62x36 mm	35.49.001.08.30	35.49.002.08.59	35.49.002.08.67
ON/OFF + EM	Ø62x36 mm	35.49.001.08.46	35.49.002.08.60	35.49.002.08.68
DALI	Ø62x36 mm	35.49.001.08.47	35.49.002.08.61	35.49.002.08.69
DALI + EM	Ø103x36 mm	35.49.001.08.48	35.49.002.08.62	35.49.002.08.70



RECESSED CEILING CUP (1pc)


MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø80 mm	35.49.001.08.31	35.49.002.08.63	35.49.002.08.71
ON/OFF + EM	Ø80 mm	35.49.001.08.49	35.49.002.08.64	35.49.002.08.72
DALI	Ø80 mm	35.49.001.08.50	35.49.002.08.65	35.49.002.08.73
DALI + EM	Ø80 mm	35.49.001.08.51	35.49.002.08.66	35.49.002.08.74



> TUPOLI 70 I-LIGHT SUSPENDED

TUPOLI-V 70

SUSPENDED

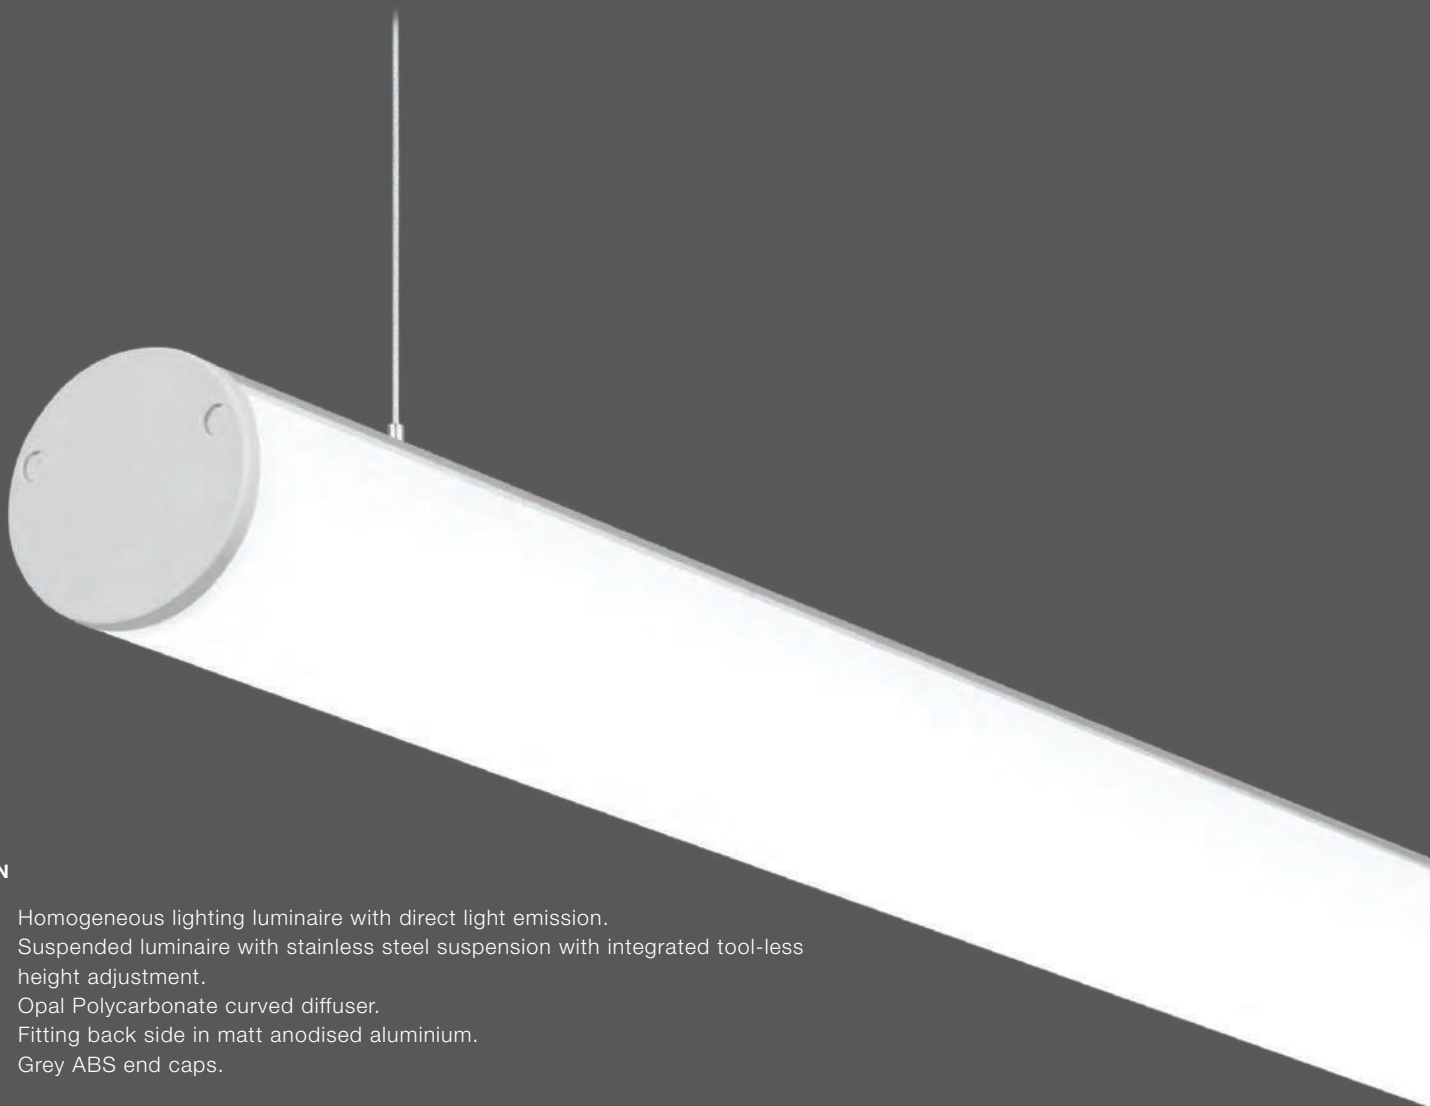

EN

- > Homogeneous lighting luminaire with direct light emission.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Opal Polycarbonate curved diffuser.
- > Fitting back side in matt anodised aluminium.
- > Grey ABS end caps.

FR

- > Luminaire d'éclairage homogène à émission directe du flux lumineux.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Diffuseur cintré en Polycarbonate Opale.
- > Profilé portant en aluminium anodisée mat.
- > Embouts en ABS finition gris.

QUICK INFO

GENERAL

Suspended
IP40
IK04
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 171 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS



Motion
Ambient Light
Motion & Ambient Light

TUPOLI-V 70 SUSPENDED

OPAL DIFFUSER

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
868	2177	19	33.49.004.08.72	33.49.004.08.82
	4353	38	33.49.004.08.73	33.49.004.08.83
1149	2901	25	33.49.004.08.74	33.49.004.08.84
	5805	50	33.49.004.08.75	33.49.004.08.85
1430	3627	31	33.49.004.08.76	33.49.004.08.86
	7255	63	33.49.004.08.77	33.49.004.08.87
2273	5803	50	33.49.004.08.78	33.49.004.08.88
	11609	101	33.49.004.08.79	33.49.004.08.89
2835	7254	63	33.49.004.08.80	33.49.004.08.90
	14511	126	33.49.004.08.81	33.49.004.08.91
4000 K				
868	2278	19	33.49.004.08.92	33.49.005.08.02
	4555	38	33.49.004.08.93	33.49.005.08.03
1149	3037	25	33.49.004.08.94	33.49.005.08.04
	6073	50	33.49.004.08.95	33.49.005.08.05
1430	3796	31	33.49.004.08.96	33.49.005.08.06
	7591	63	33.49.004.08.97	33.49.005.08.07
2273	6073	50	33.49.004.08.98	33.49.005.08.08
	12146	101	33.49.004.08.99	33.49.005.08.09
2835	7592	63	33.49.005.08.00	33.49.005.08.10
	15183	126	33.49.005.08.01	33.49.005.08.11

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.

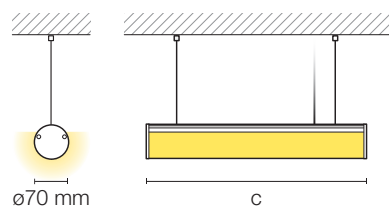

TUPOLI-V 70

SUSPENDED

COMPONENTS



SUSPENSION SYSTEM (2pcs)

TYPE	1m	3m	5m
Matt White + Stainless Steel Cable	35.42.000.01.54	35.42.000.01.62	35.42.001.01.26



SURFACE CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø62x36 mm	35.49.001.08.30	35.49.002.08.59	35.49.002.08.67
ON/OFF + EM	Ø62x36 mm	35.49.001.08.46	35.49.002.08.60	35.49.002.08.68
DALI	Ø62x36 mm	35.49.001.08.47	35.49.002.08.61	35.49.002.08.69
DALI + EM	Ø103x36 mm	35.49.001.08.48	35.49.002.08.62	35.49.002.08.70



RECESSED CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø80 mm	35.49.001.08.31	35.49.002.08.63	35.49.002.08.71
ON/OFF + EM	Ø80 mm	35.49.001.08.49	35.49.002.08.64	35.49.002.08.72
DALI	Ø80 mm	35.49.001.08.50	35.49.002.08.65	35.49.002.08.73
DALI + EM	Ø80 mm	35.49.001.08.51	35.49.002.08.66	35.49.002.08.74

OPTIONS



EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF	COD
EM 1H 3W	35.00.003.01.23*
DALI	COD
EM 1H 5,4W DALI	35.00.004.01.54*


* Applies to lengths equal to or greater than 1430 mm.

> On request – External Emergency. Box dimensions: 45x120x360 mm.



TUPOLI-V 70

SURFACE

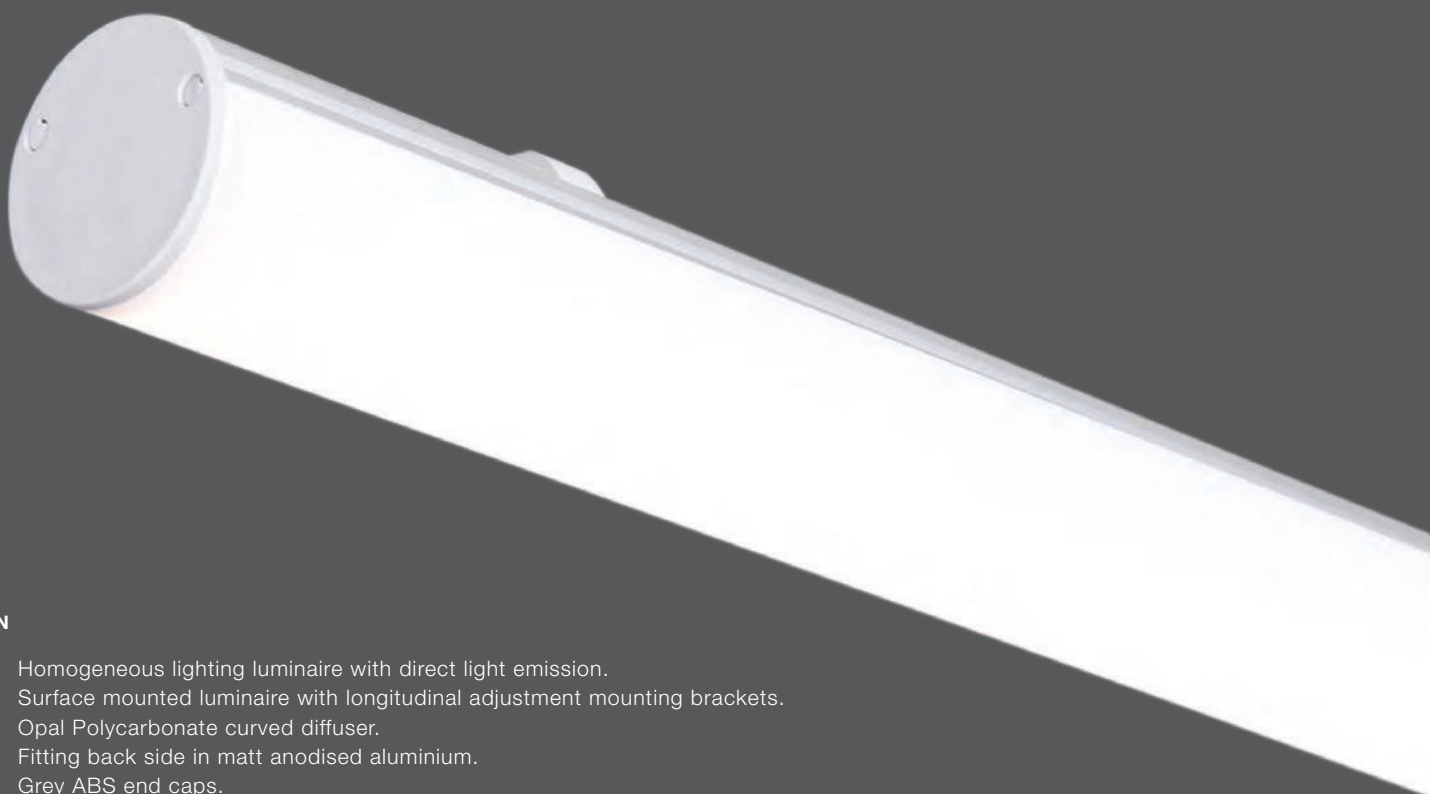

EN

- > Homogeneous lighting luminaire with direct light emission.
- > Surface mounted luminaire with longitudinal adjustment mounting brackets.
- > Opal Polycarbonate curved diffuser.
- > Fitting back side in matt anodised aluminium.
- > Grey ABS end caps.

FR

- > Luminaire d'éclairage homogène à émission directe du flux lumineux.
- > Application apparente par pattes de fixation à réglage longitudinal.
- > Diffuseur cintré en Polycarbonate Opale.
- > Profilé portant en aluminium anodisée mat.
- > Embouts en ABS finition gris.

QUICK INFO

GENERAL

Surface
IP40
IK07
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 171 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

TUPOLI-V 70 SURFACE

OPAL DIFFUSER

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
868	2177	19	33.49.004.08.32	33.49.004.08.42
	4353	38	33.49.004.08.33	33.49.004.08.43
1149	2901	25	33.49.004.08.34	33.49.004.08.44
	5805	50	33.49.004.08.35	33.49.004.08.45
1430	3627	31	33.49.004.08.36	33.49.004.08.46
	7255	63	33.49.004.08.37	33.49.004.08.47
2273	5803	50	33.49.004.08.38	33.49.004.08.48
	11609	101	33.49.004.08.39	33.49.004.08.49
2835	7254	63	33.49.004.08.40	33.49.004.08.50
	14511	126	33.49.004.08.41	33.49.004.08.51
4000 K				
868	2278	19	33.49.004.08.52	33.49.004.08.62
	4555	38	33.49.004.08.53	33.49.004.08.63
1149	3037	25	33.49.004.08.54	33.49.004.08.64
	6073	50	33.49.004.08.55	33.49.004.08.65
1430	3796	31	33.49.004.08.56	33.49.004.08.66
	7591	63	33.49.004.08.57	33.49.004.08.67
2273	6073	50	33.49.004.08.58	33.49.004.08.68
	12146	101	33.49.004.08.59	33.49.004.08.69
2835	7592	63	33.49.004.08.60	33.49.004.08.70
	15183	126	33.49.004.08.61	33.49.004.08.71

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.



OPTIONS

EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF	COD
EM 1H 3W	35.00.003.01.23*
DALI	COD
EM 1H 5,4W DALI	35.00.004.01.54*


* Applies to lengths equal to or greater than 1430 mm.

> On request – External Emergency. Box dimensions: 45x120x360 mm.



TUPOLI-360 70

SUSPENDED

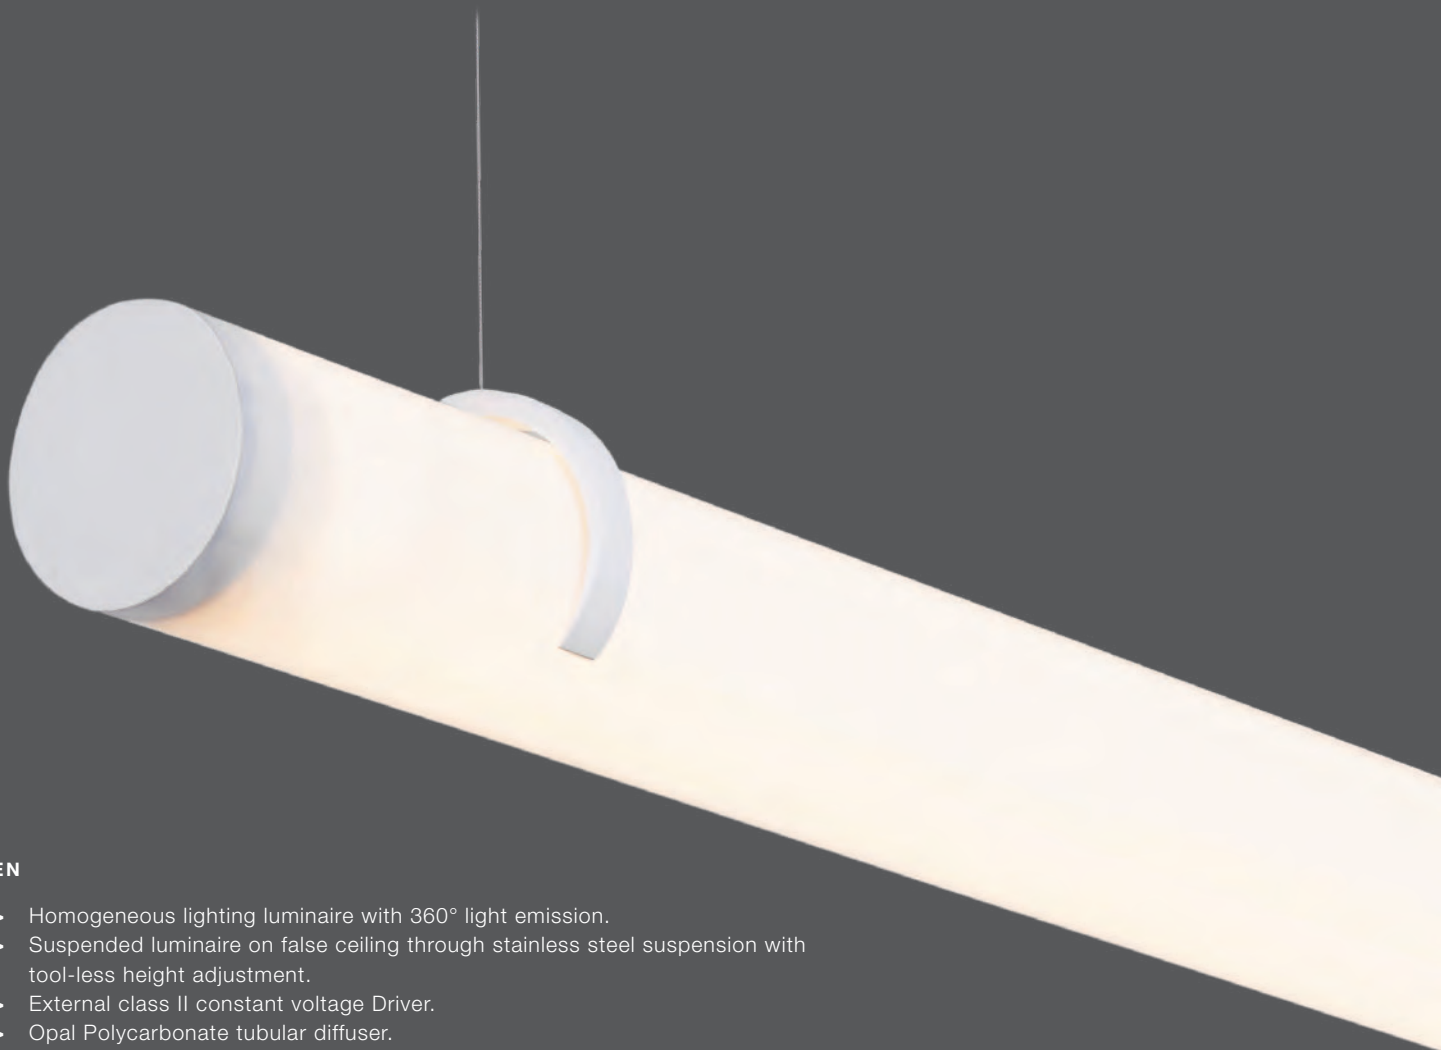

EN

- > Homogeneous lighting luminaire with 360° light emission.
- > Suspended luminaire on false ceiling through stainless steel suspension with tool-less height adjustment.
- > External class II constant voltage Driver.
- > Opal Polycarbonate tubular diffuser.
- > Inner aluminium reflector to increase the luminaire performance.
- > Matt white powder coated aluminium end caps without visible screws.

FR

- > Luminaire d'éclairage homogène avec diffusion de lumière sur 360°.
- > Application suspendue en faux plafond par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Driver externe à tension constante et classe de protection II.
- > Diffuseur tubulaire en Polycarbonate Opale.
- > Réflecteur interne en aluminium pour une performance accrue du luminaire.
- > Embouts en aluminium finition blanc mat et sans aucune vis visible.

QUICK INFO

GENERAL

Suspended
IP40
IK08
850°C
Class III
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 141 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L80/B10 @Tc=55°C
24 VDC

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

SENSORS

Motion
Ambient Light
Motion & Ambient Light

TUPOLI-360 70 SUSPENDED

OPAL DIFFUSER

c (mm)	Output (lm)	LED Power (W)	LED Voltage	COD
3000 K				
574	824	8	24 VDC	33.49.004.08.20
1074	1648	16	24 VDC	33.49.004.08.21
1574	2472	23	24 VDC	33.49.004.08.22
4000 K				
574	824	7	24 VDC	33.49.004.08.26
1074	1648	15	24 VDC	33.49.004.08.27
1574	2472	22	24 VDC	33.49.004.08.28

COMPONENTS

SUSPENSION SYSTEM (2pcs)

TYPE	1m	3m	5m
Matt White	35.49.003.01.48	35.49.003.01.49	35.49.002.08.76

RECESSED CEILING CUP (1pc)



TYPE	1m	3m	5m
Matt White Ø80 mm	35.49.001.08.31	35.49.002.08.63	35.49.002.08.71

DRIVER - EXTERNAL

ON/OFF	DIMENSION	COD
Power Supply 4-32W IP20	21x40x220 mm	35.00.003.01.75
Power Supply 6-49W IP20	21x40x250 mm	35.00.003.01.74
Power Supply 12-86W IP20	21x40x300 mm	35.00.003.01.73

DALI	DIMENSION	COD
Power Supply 12-90W IP20	30x43x295 mm	35.00.003.01.76
Power Supply 18-135W IP20	31x43x325 mm	35.00.003.01.77

> External Driver to be housed nearby.

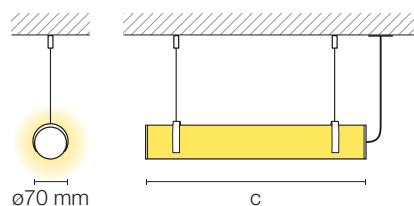



> TUPOLI-360 70 SUSPENDED



> TUPOLI-360 70 VERTICAL SUSPENDED

TUPOLI-360 70 VERTICAL SUSPENDED



EN

- > Homogeneous lighting luminaire with 360° light emission.
- > Suspended luminaire on false ceiling through stainless steel suspension with tool-less height adjustment.
- > External class II constant voltage Driver.
- > Opal Polycarbonate tubular diffuser.
- > Inner aluminium reflector to increase the luminaire performance.
- > Matt white powder coated aluminium end caps without visible screws.

FR

- > Luminaire d'éclairage homogène avec diffusion de lumière sur 360°.
- > Application suspendue en faux plafond par câble en acier inoxydable avec réglage en hauteur sans outil.
- > Driver externe à tension constante et classe de protection II.
- > Diffuseur tubulaire en Polycarbonate Opale.
- > Réflecteur interne en aluminium pour une performance accrue du luminaire.
- > Embouts en aluminium finition blanc mat et sans aucune vis visible.

QUICK INFO

GENERAL

Suspended
IP40
IK08
850°C
Class III
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 141 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L80/B10 @Tc=55°C
24 VDC

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

SENSORS

Motion
Ambient Light
Motion & Ambient Light

TUPOLI-360 70 VERTICAL SUSPENDED
OPAL DIFFUSER

c (mm)	Output (lm)	LED Power (W)	LED Voltage	COD
3000 K				
574	824	8	24 VDC	33.49.004.08.08
1074	1648	16	24 VDC	33.49.004.08.09
1574	2472	23	24 VDC	33.49.004.08.10
4000 K				
574	824	7	24 VDC	33.49.004.08.14
1074	1648	15	24 VDC	33.49.004.08.15
1574	2472	22	24 VDC	33.49.004.08.16

COMPONENTS



SUSPENSION SYSTEM (1pc)

TYPE	1 m	3 m	5 m
Matt White	35.42.001.01.77	35.42.001.01.78	35.42.001.01.79



RECESSED CEILING CUP (1pc)

TYPE	1 m	3 m	5 m
Matt White Ø80 mm	35.49.001.08.31	35.49.002.08.63	35.49.002.08.71





DRIVER - EXTERNAL

ON/OFF	DIMENSION	COD
Power Supply 4-32W IP20	21x40x220 mm	35.00.003.01.75
Power Supply 6-49W IP20	21x40x250 mm	35.00.003.01.74
Power Supply 12-86W IP20	21x40x300 mm	35.00.003.01.73

CLASS II

DALI	DIMENSION	COD
Power Supply 12-90W IP20	30x43x295 mm	35.00.003.01.76
Power Supply 18-135W IP20	31x43x325 mm	35.00.003.01.77

> External Driver to be housed nearby.



VON LINEAR TRIMLESS



OUR BESPOKE PROJECTS


The world's most exciting
to find them, we have
the best of the best
to find them, we have
the best of the best
to find them, we have
the best of the best
to find them, we have
the best of the best
to find them, we have
the best of the best






> VON C-LIGHT & DOUBLE SPOT SURFACE

VON, A MODULAR CONCEPT. OVERVIEW

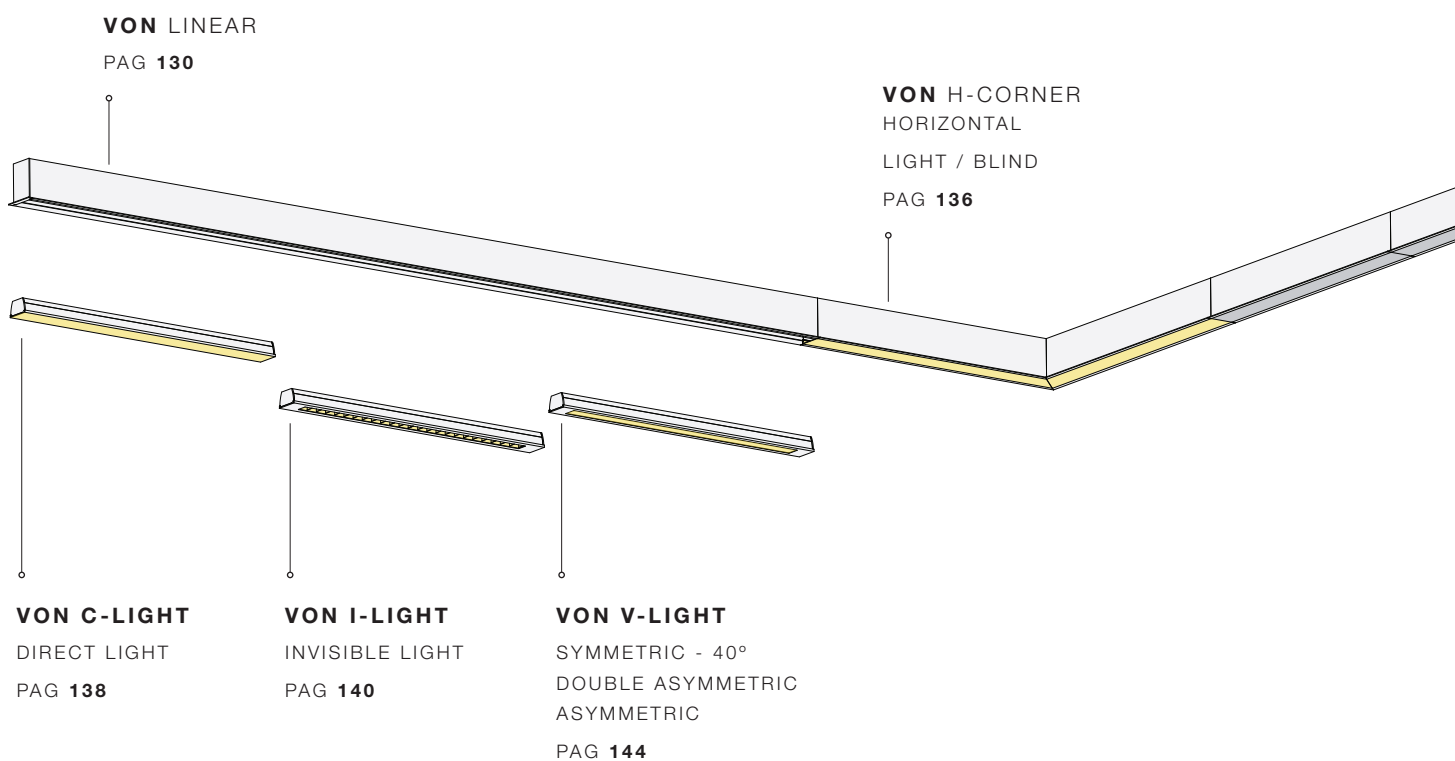

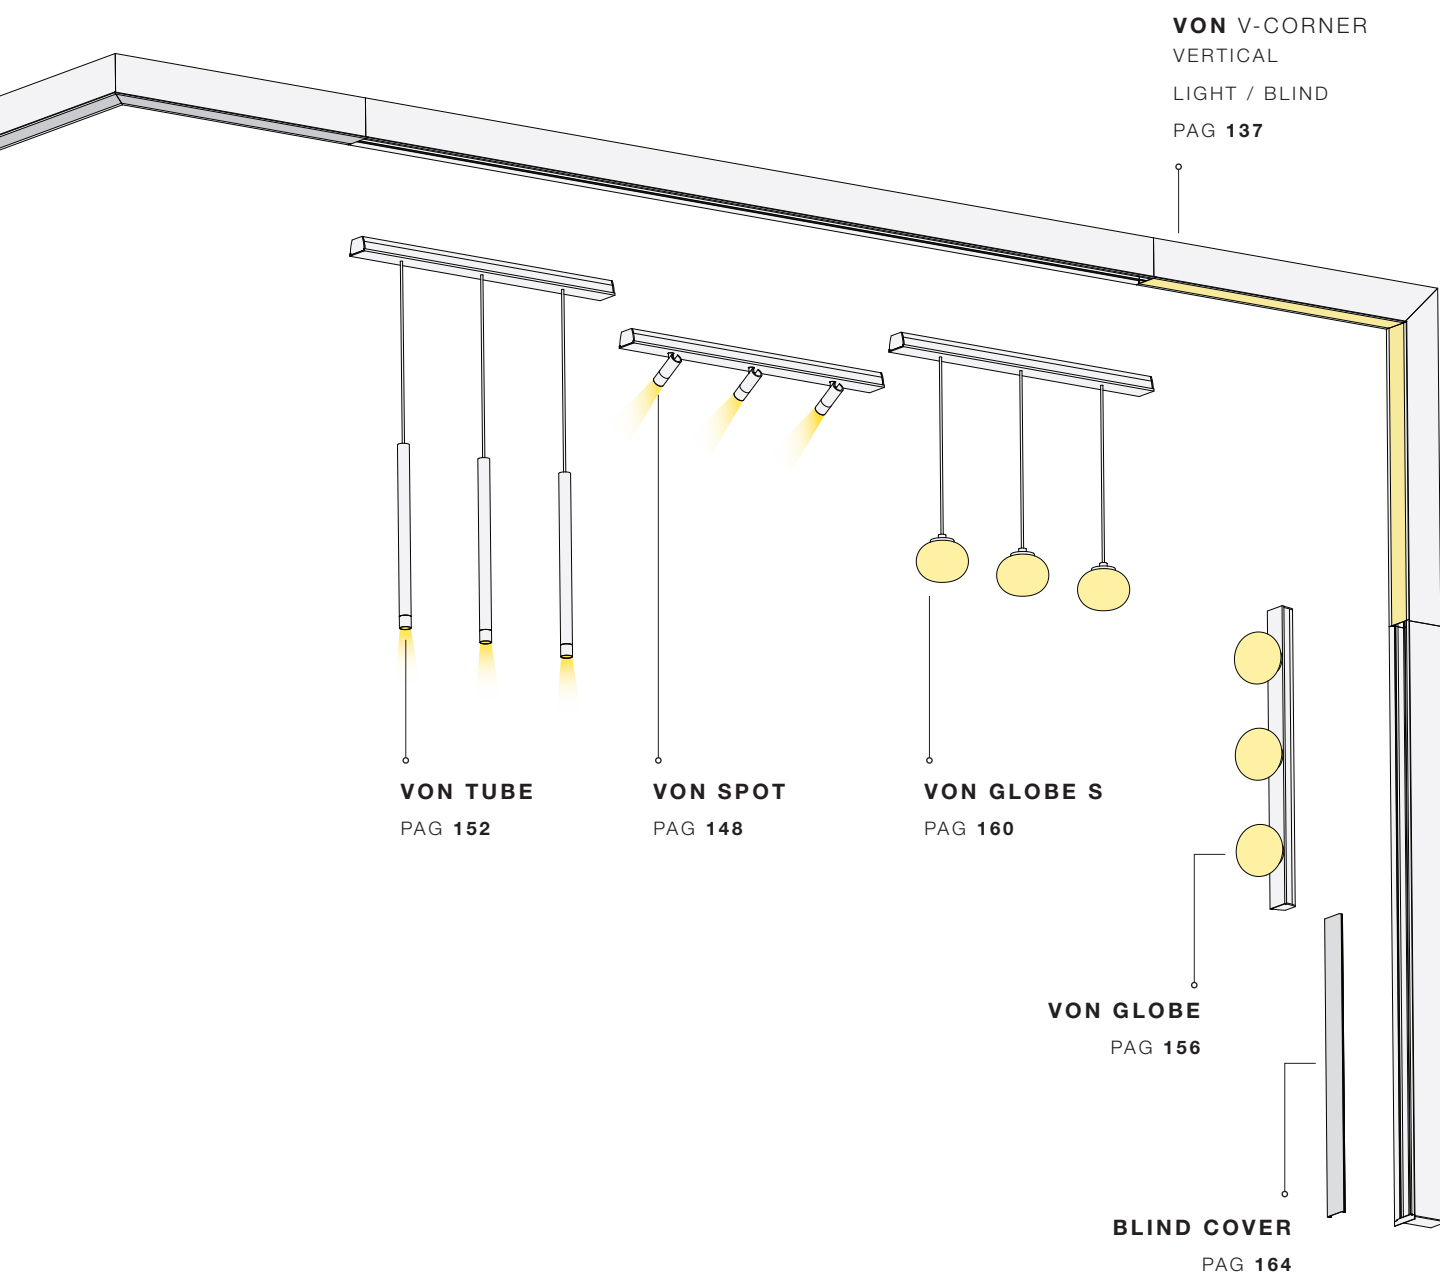

VON

A MODULAR CONCEPT

EN

- > Structural profile system for housing VON lighting modules.
- > Designed for continuous lighting systems in various installation options – recessed trim and trimless, surface-mounted and suspended.
- > Illuminated and blind 90° corners are also available allowing for horizontal or vertical direction changes.
- > The structural profiles can be fitted with different VON modules to create the ideal lighting scene for any space.
- > Lighting modules can be released from the structural profile, switched from position and then securely clicked back into place at any time.
- > Pre-wired profiles with plug & play electrical connector system.
- > Textured finish aluminium body.

FR

- > Système de profilés structurels pour loger les modules d'éclairage VON.
- > Conçu pour être utilisé en ligne continue dans plusieurs options d'application – apparente, suspendue et encastrée avec et sans cadre (trimless).
- > Angles 90° avec et sans éclairage sont aussi disponibles pour permettre des changements de direction horizontal ou vertical.
- > Les profilés structurels peuvent loger différents modules VON, pour créer l'éclairage idéal à chaque espace.
- > Les modules d'éclairage peuvent être enlevés, repositionnés et ensuite réinstallés en toute sécurité au profilé structurel en un simple clic.
- > Profilés pré-câblés de série avec système de branchement électrique rapide.
- > Corps en aluminium finition texturé.

QUICK INFO**GENERAL**

Suspended / Surface
 Recessed / Trimless
 IP20

ELECTRICAL SYSTEM

230V/50Hz
 ON/OFF, DALI

FINISHING

RAL 9003 Textured White
 RAL 9005 Textured Black


OPTIONS**FINISHING**

 Other Colours

**VON LINEAR**

- > PRE-WIRED PROFILES;
- > PLUG & PLAY SYSTEM;
- > EASY ASSEMBLY.

VON LINEAR SUSPENDED



VON SUSPENDED LINEAR

c (mm)	WHITE	BLACK
641	35.42.90.00.004	35.42.90.00.000
1281	35.42.90.00.005	35.42.90.00.001
1921	35.42.90.00.006	35.42.90.00.002
2561	35.42.90.00.007	35.42.90.00.003

COMPONENTS



END CAP (1pc)

		WHITE	BLACK
End Cap		35.42.90.00.601	35.42.90.00.602



SURFACE CEILING CUP (1pc)

WHITE	DIMENSION	1 m	3 m	5 m
ON/OFF, DALI	Ø62x36 mm	35.42.90.00.606	35.42.90.00.607	35.42.90.00.608



RECESSED CEILING CUP (1pc)

WHITE	DIMENSION	1 m	3 m	5 m
ON/OFF, DALI	Ø80 mm	35.42.90.00.609	35.42.90.00.610	35.42.90.00.611




SUSPENSION SYSTEM (2pcs)

TYPE	1 m	3 m	5 m
Matt White + Stainless Steel Cable	35.42.90.00.603	35.42.90.00.604	35.42.90.00.605
Matt Black + Stainless Steel Cable	35.42.90.00.612	35.42.90.00.613	35.42.90.00.614




LINEAR COUPLER (1pc)

	COD
Coupler	35.42.90.00.600

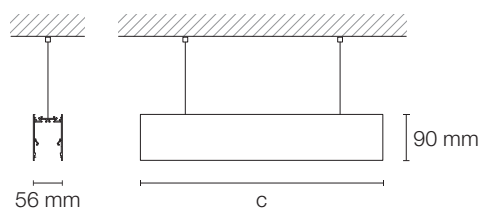

VON LINEAR SURFACE



VON SURFACE LINEAR

c (mm)	WHITE	BLACK
641	35.42.90.10.004	35.42.90.10.000
1281	35.42.90.10.005	35.42.90.10.001
1921	35.42.90.10.006	35.42.90.10.002
2561	35.42.90.10.007	35.42.90.10.003

COMPONENTS




END CAP (1pc)

	WHITE	BLACK
End Cap	35.42.90.00.601	35.42.90.00.602




LINEAR COUPLER (1pc)

	COD
Coupler	35.42.90.00.600



VON LINEAR

RECESSED / TRIMLESS



VON RECESSED LINEAR

c (mm)	WHITE	BLACK
641	35.42.90.20.004	35.42.90.20.000
1281	35.42.90.20.005	35.42.90.20.001
1921	35.42.90.20.006	35.42.90.20.002
2561	35.42.90.20.007	35.42.90.20.003



VON TRIMLESS LINEAR

c (mm)	WHITE
641	35.42.90.30.004
1281	35.42.90.30.005
1921	35.42.90.30.006
2561	35.42.90.30.007

COMPONENTS



RECESSED END CAP (1pc)

	WHITE	BLACK
End Cap	35.42.90.20.601	35.42.90.20.602



TRIMLESS END CAP (1pc)

	WHITE
End Cap	35.42.90.30.600




LINEAR COUPLER (1pc)


	COD
Coupler	35.42.90.20.600

VON RECESSED




VON TRIMLESS



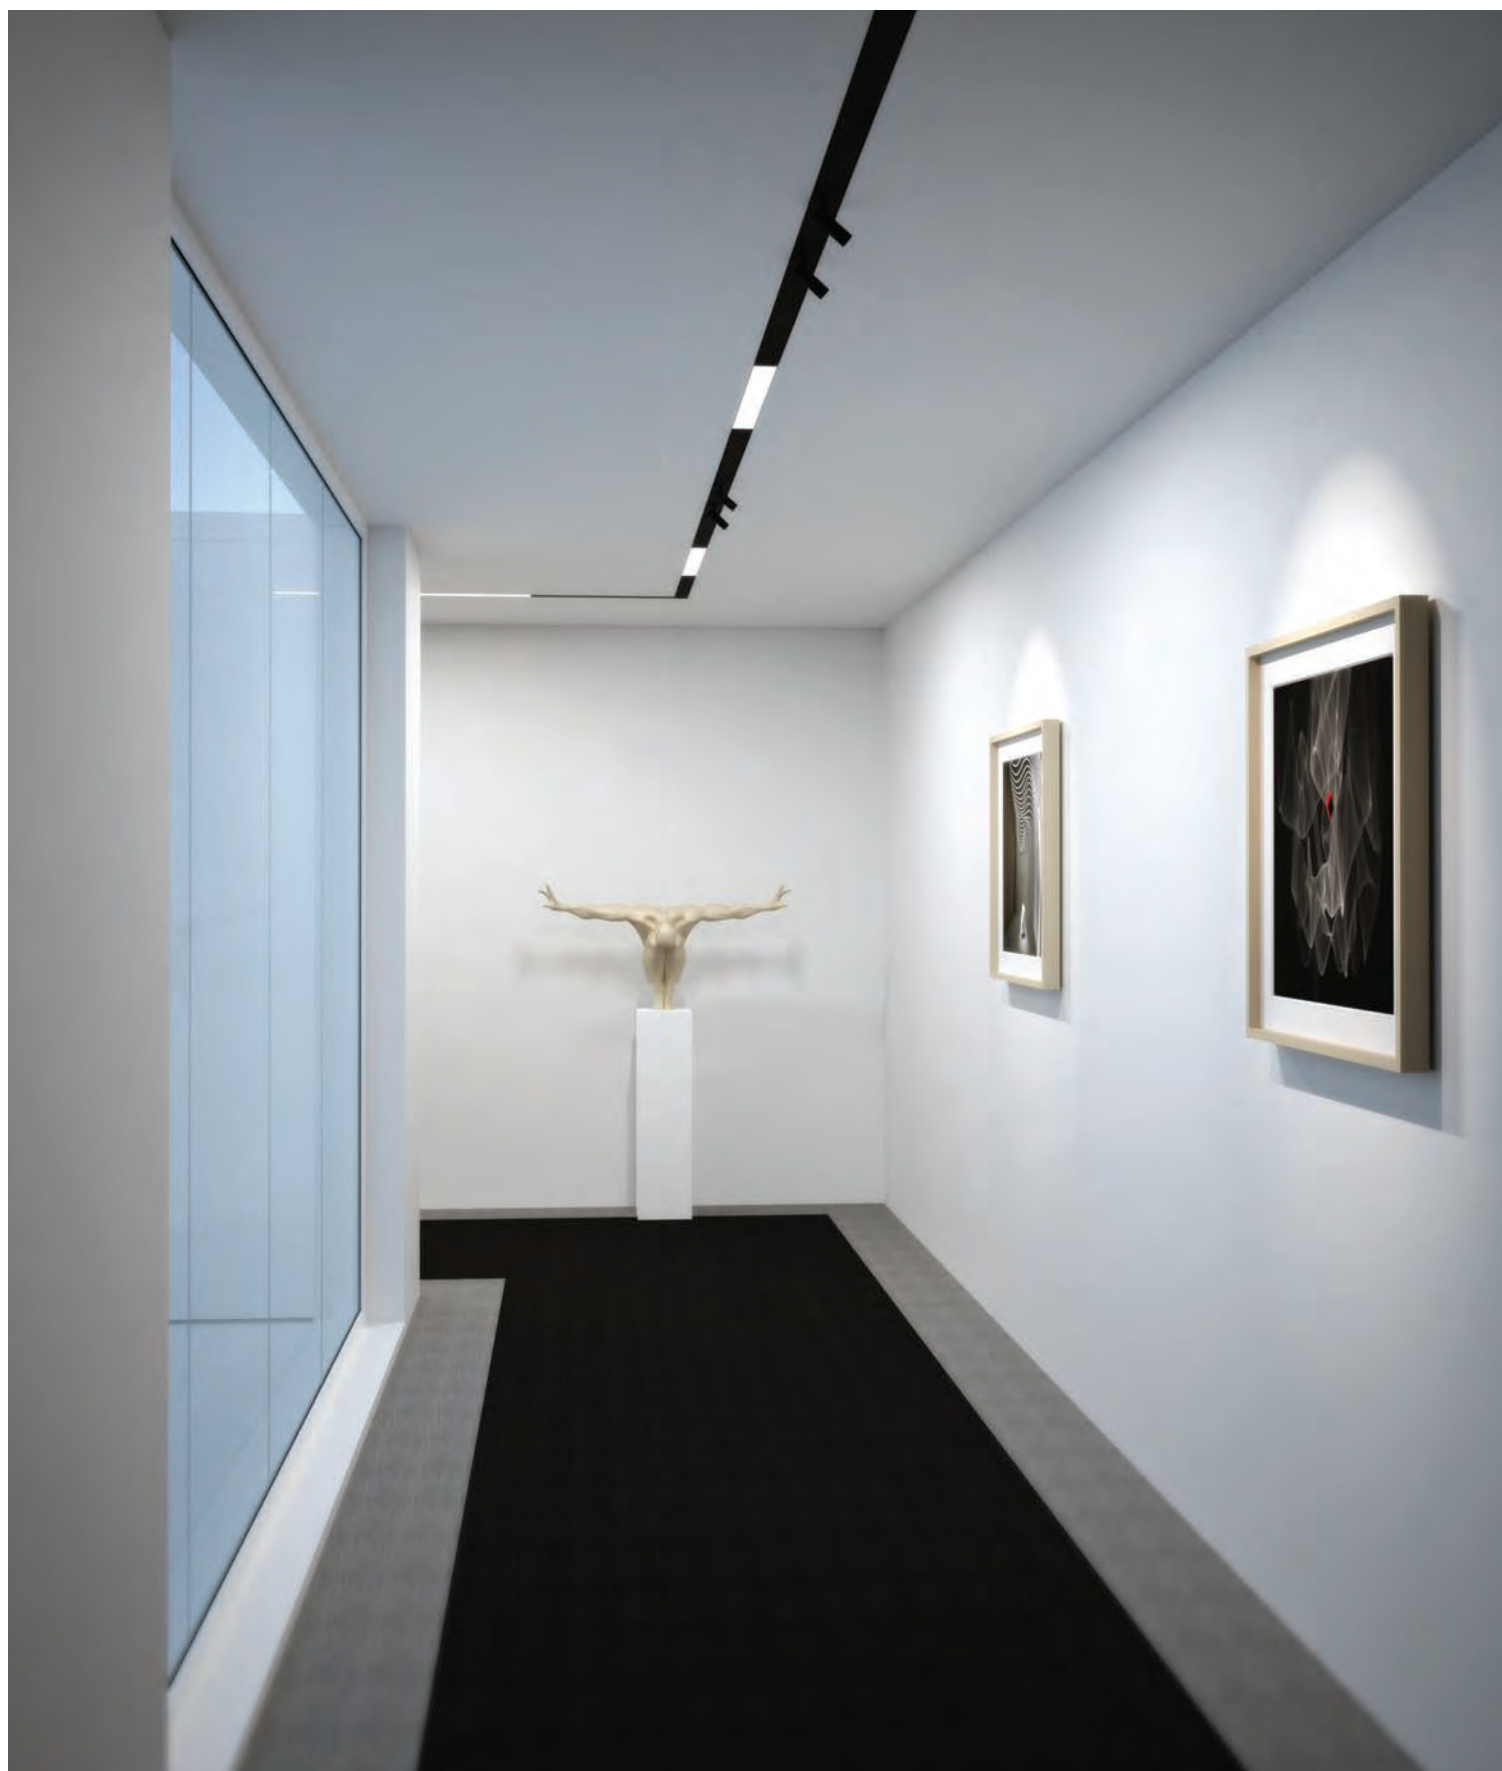


VON H-CORNER HORIZONTAL

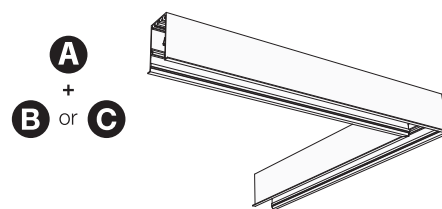


A PROFILE H-CORNER 90°

Type	WHITE	BLACK
Suspended	35.42.90.00.466	35.42.90.00.467
Surface	35.42.90.10.008	35.42.90.10.009
Recessed	35.42.90.20.010	35.42.90.20.011
Trimless	35.42.90.30.010	–



B LIGHT H-CORNER 90°


Output (lm)	System (W)	ON/OFF	DALI
2700 K			
2033	21	35.42.90.00.470	35.42.90.00.471
3955	45	35.42.90.00.460	35.42.90.00.461
3000 K			
2093	21	35.42.90.00.472	35.42.90.00.473
4078	45	35.42.90.00.462	35.42.90.00.463
4000 K			
2192	21	35.42.90.00.474	35.42.90.00.475
4266	45	35.42.90.00.464	35.42.90.00.465




C BLIND H-CORNER 90°

Type	WHITE	BLACK
Blind Cover H-Corner	35.42.90.00.446	35.42.90.00.452



SUSPENDED / SURFACE




RECESSED



TRIMLESS




VON V-CORNER VERTICAL

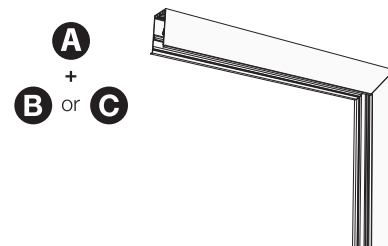

A PROFILE V-CORNER 90°

Type

	WHITE	BLACK
Recessed	35.42.90.20.008	35.42.90.20.009
Trimless	35.42.90.30.008	—



B LIGHT V-CORNER 90°


Output (lm)

System (W)

ON/OFF

DALI

2700 K			
2033	21	35.42.90.00.476	35.42.90.00.477
3955	45	35.42.90.00.454	35.42.90.00.455
3000 K			
2093	21	35.42.90.00.478	35.42.90.00.479
4078	45	35.42.90.00.456	35.42.90.00.457
4000 K			
2192	21	35.42.90.00.480	35.42.90.00.481
4266	45	35.42.90.00.458	35.42.90.00.459



C BLIND V-CORNER 90°


Type

WHITE



BLACK

Blind Cover V-Corner	35.42.90.00.447	35.42.90.00.453
----------------------	-----------------	-----------------

RECESSED



TRIMLESS



VON C-LIGHT

DIRECT LIGHT
MODULE




EN

- > Direct light module with diffuser for uniform light distribution.
- > Designed for integration into VON surface, suspended, recessed trim or trimless mounting profiles.
- > Modules are securely attached to the structural profile with a simple click.
- > Plug & play electrical connector system for quick module installation and position changes.
- > Opal Polycarbonate diffuser.
- > Textured finish aluminium body.

FR

- > Module d'éclairage directe avec diffuseur pour une répartition uniforme du flux lumineux.
- > Conçu pour l'intégration dans les profilées VON d'application apparente, suspendue ou encastrée avec et sans cadre.
- > Les modules sont solidement fixés au profilé structurel en un simple clic.
- > Le système de branchement électrique rapide simplifie l'installation et les changements de position des modules.
- > Diffuseur en Polycarbonate Opale.
- > Corps en aluminium finition texturé.

VON C-LIGHT



QUICK INFO

GENERAL

Module
IP20
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 193 lm/W
2700 K, 3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Textured White

OPTIONS

LED

5000 K, 6500 K
RGB, RGBW

ELECTRICAL SYSTEM

DSI, DIM 1-10V

CONTROL SYSTEM

Bluetooth

SENSORS



Motion
Ambient Light
Motion & Ambient Light

VON C-LIGHT MODULE

OPAL DIFFUSER

MATT WHITE FINISHING


c (mm)	Output (lm)	System (W)	ON/OFF	DALI
2700 K				
640	929	11	35.42.90.00.012	35.42.90.00.016
	1776	22	35.42.90.00.013	35.42.90.00.017
1280	1859	22	35.42.90.00.014	35.42.90.00.018
	3551	45	35.42.90.00.015	35.42.90.00.019
3000 K				
640	1077	11	35.42.90.00.020	35.42.90.00.024
	2059	22	35.42.90.00.021	35.42.90.00.025
1280	2154	22	35.42.90.00.022	35.42.90.00.026
	4118	45	35.42.90.00.023	35.42.90.00.027
4000 K				
640	1127	11	35.42.90.00.028	35.42.90.00.032
	2154	22	35.42.90.00.029	35.42.90.00.033
1280	2254	22	35.42.90.00.030	35.42.90.00.468
	4309	45	35.42.90.00.031	35.42.90.00.469

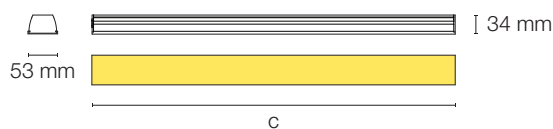

VON I-LIGHT

INVISIBLE LIGHT - UGR <13


MODULE

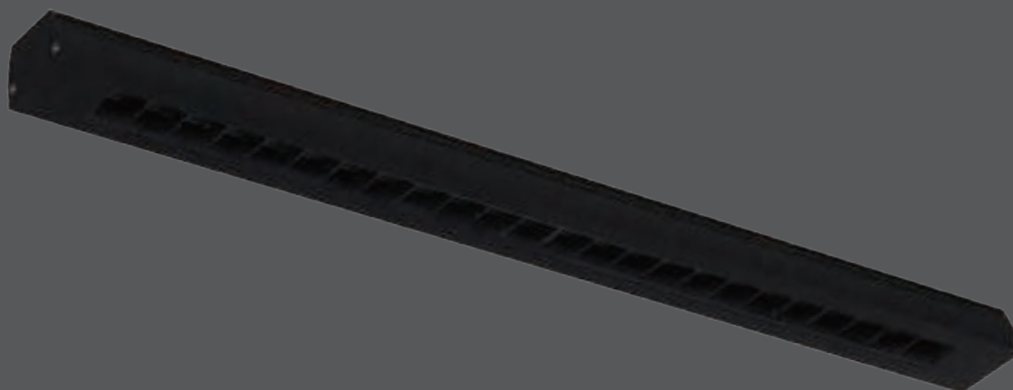

EN

- > Invisible light module with outstanding glare control.
- > Designed for integration into VON surface, suspended, recessed trim or trimless mounting profiles.
- > The light source is invisible, offering high visual comfort with UGR <13 for maximum glare protection.
- > The integrated lens optics allow beam angles of 16°, 40° or 35°x12° (elliptical).
- > Modules are securely attached to the structural profile with a simple click.
- > Plug & play electrical connector system for quick module installation and position changes.
- > Textured finish aluminium body.


VON I-LIGHT 12



FR

- > Module de lumière invisible offrant un contrôle exceptionnelle de l'éblouissement.
- > Conçu pour l'intégration dans les profilées VON d'application apparente, suspendue ou encastrée avec et sans cadre.
- > La source de lumière est invisible, offrant un grand confort visuel avec UGR <13 pour une protection anti-éblouissement maximale.
- > L'optique de lentille intégrée permet des angles de diffusion de 16°, 40° ou 35°x12° (elliptique).
- > Les modules sont solidement fixés au profilé structurel en un simple clic.
- > Le système de branchement électrique rapide simplifie l'installation et les changements de position des modules.
- > Corps en aluminium finition texturé.

VON I-LIGHT 24



QUICK INFO

GENERAL

Module
IP20
650°C
Class I
Ta= -20°C +35°C

OPTIC

Clear PMMA Lens
UGR <13

LED

Efficacy up to 103 lm/W
2700 K, 3000 K, 4000 K
CRI >90
Lifetime 80 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Textured White
RAL 9005 Textured Black

OPTIONS

LED

5000 K, 6500 K
RGB, RGBW

ELECTRICAL SYSTEM

DSI, DIM 1-10V

CONTROL SYSTEM

Bluetooth

FINISHING

Other Colours

SENSORS

Motion
Ambient Light
Motion & Ambient Light



VON I-LIGHT 12 MODULE

MATT WHITE FINISHING

Beam Angle (°)	Output (lm)	System (W)	ON/OFF	DALI
2700 K				
16°	1179	13	35.42.90.00.043	35.42.90.00.047
40°	1183	13	35.42.90.00.044	35.42.90.00.048
Elliptical 35°x12°	1066	13	35.42.90.00.045	35.42.90.00.049
3000 K				
16°	1179	13	35.42.90.00.059	35.42.90.00.063
40°	1183	13	35.42.90.00.060	35.42.90.00.064
Elliptical 35°x12°	1066	13	35.42.90.00.061	35.42.90.00.065
4000 K				
16°	1238	13	35.42.90.00.075	35.42.90.00.079
40°	1242	13	35.42.90.00.076	35.42.90.00.080
Elliptical 35°x12°	1120	13	35.42.90.00.077	35.42.90.00.081

MATT BLACK FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
2700 K				
16°	1179	13	35.42.90.00.035	35.42.90.00.039
40°	1183	13	35.42.90.00.036	35.42.90.00.040
Elliptical 35°x12°	1066	13	35.42.90.00.037	35.42.90.00.041
3000 K				
16°	1179	13	35.42.90.00.051	35.42.90.00.055
40°	1183	13	35.42.90.00.052	35.42.90.00.056
Elliptical 35°x12°	1066	13	35.42.90.00.053	35.42.90.00.057
4000 K				
16°	1238	13	35.42.90.00.067	35.42.90.00.071
40°	1242	13	35.42.90.00.068	35.42.90.00.072
Elliptical 35°x12°	1120	13	35.42.90.00.069	35.42.90.00.073

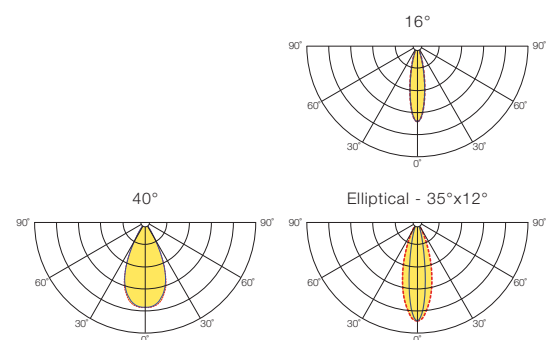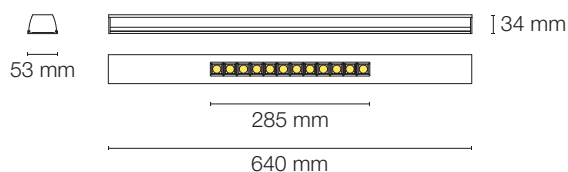

QUICK INFO

GENERAL

Module
IP20
650°C
Class I
Ta= -20°C +35°C

OPTIC

Clear PMMA Lens
UGR <13

LED

Efficacy up to 103 lm/W
2700 K, 3000 K, 4000 K
CRI >90
Lifetime 80 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Textured White
RAL 9005 Textured Black

OPTIONS

LED

5000 K, 6500 K
RGB, RGBW

ELECTRICAL SYSTEM

DSI, DIM 1-10V

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

SENSORS

Motion
Ambient Light
Motion & Ambient Light



VON I-LIGHT 24 MODULE

MATT WHITE FINISHING

Beam Angle (°)	Output (lm)	System (W)	ON/OFF	DALI
2700 K				
16°	2358	27	35.42.90.00.091	35.42.90.00.095
40°	2365	27	35.42.90.00.092	35.42.90.00.096
35°x12°	2133	27	35.42.90.00.093	35.42.90.00.097
3000 K				
16°	2358	27	35.42.90.00.107	35.42.90.00.111
40°	2365	27	35.42.90.00.108	35.42.90.00.112
35°x12°	2133	27	35.42.90.00.109	35.42.90.00.113
4000 K				
16°	2477	27	35.42.90.00.123	35.42.90.00.127
40°	2485	27	35.42.90.00.124	35.42.90.00.128
35°x12°	2240	27	35.42.90.00.125	35.42.90.00.129

MATT BLACK FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
2700 K				
16°	2358	27	35.42.90.00.083	35.42.90.00.087
40°	2365	27	35.42.90.00.084	35.42.90.00.088
35°x12°	2133	27	35.42.90.00.085	35.42.90.00.089
3000 K				
16°	2358	27	35.42.90.00.099	35.42.90.00.103
40°	2365	27	35.42.90.00.100	35.42.90.00.104
35°x12°	2133	27	35.42.90.00.101	35.42.90.00.105
4000 K				
16°	2477	27	35.42.90.00.115	35.42.90.00.119
40°	2485	27	35.42.90.00.116	35.42.90.00.120
35°x12°	2240	27	35.42.90.00.117	35.42.90.00.121

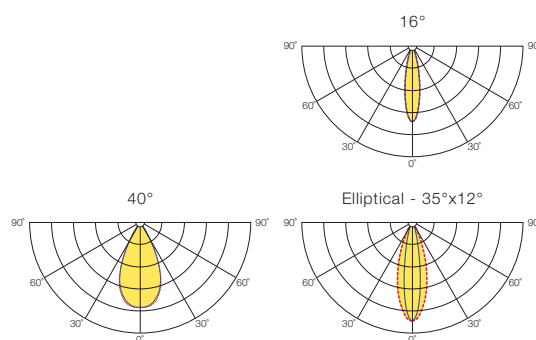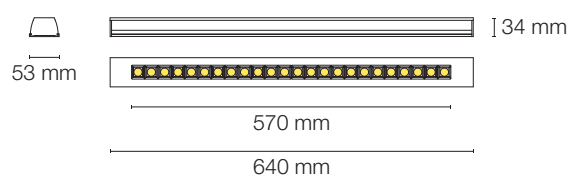



VON V-LIGHT

SYMMETRIC / ASYMMETRIC

MODULE




EN

- > Direct light module with linear lens for precise light control.
- > Designed for integration into VON surface, suspended, recessed trim or trimless mounting profiles.
- > High efficiency linear lenses for symmetric, asymmetric or double asymmetric light distribution.
- > Modules are securely attached to the structural profile with a simple click.
- > Plug & play electrical connector system for quick module installation and position changes.
- > Textured finish aluminium body.

FR

- > Module d'éclairage directe avec lentille linéaire pour un contrôle précis de la lumière.
- > Conçu pour l'intégration dans les profilées VON d'application apparente, suspendue ou encastrée avec et sans cadre.
- > Lentilles linéaires à haute efficacité avec option de distribution lumineuse symétrique, asymétrique ou double asymétrique.
- > Les modules sont solidement fixés au profilé structurel en un simple clic.
- > Le système de branchement électrique rapide simplifie l'installation et les changements de position des modules.
- > Corps en aluminium finition texturé.

VON V-LIGHT



QUICK INFO

GENERAL

Module
IP20
650°C
Class I
Ta= -20°C +35°C

OPTIC

Clear PMMA Lens

LED

Efficacy up to 161 lm/W
2700 K, 3000 K, 4000 K
CRI >90
Lifetime 72 000 H
L80/B10 @TC=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Textured White

OPTIONS

LED

5000 K, 6500 K
RGB, RGBW

ELECTRICAL SYSTEM

DSI, DIM 1-10V

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours



SENSORS

Motion
Ambient Light
Motion & Ambient Light

VON V-LIGHT MODULE

MATT WHITE FINISHING

Beam Angle (°)	Output (lm)	System (W)	ON/OFF	DALI
2700 K				
Symmetric 40°	1201	12	35.42.90.00.144	35.42.90.00.150
	2476	25	35.42.90.00.147	35.42.90.00.153
Double Asymmetric	1215	12	35.42.90.00.143	35.42.90.00.149
	2503	25	35.42.90.00.146	35.42.90.00.152
Asymmetric	1151	12	35.42.90.00.142	35.42.90.00.148
	2373	25	35.42.90.00.145	35.42.90.00.151
3000 K				
Symmetric 40°	1372	12	35.42.90.00.168	35.42.90.00.174
	2589	25	35.42.90.00.171	35.42.90.00.177
Double Asymmetric	1387	12	35.42.90.00.167	35.42.90.00.173
	2617	25	35.42.90.00.170	35.42.90.00.176
Asymmetric	1315	12	35.42.90.00.166	35.42.90.00.172
	2481	25	35.42.90.00.169	35.42.90.00.175
4000 K				
Symmetric 40°	1432	12	35.42.90.00.192	35.42.90.00.198
	2702	25	35.42.90.00.195	35.42.90.00.201
Double Asymmetric	1448	12	35.42.90.00.191	35.42.90.00.197
	2732	25	35.42.90.00.194	35.42.90.00.200
Asymmetric	1373	12	35.42.90.00.190	35.42.90.00.196
	2589	25	35.42.90.00.193	35.42.90.00.199

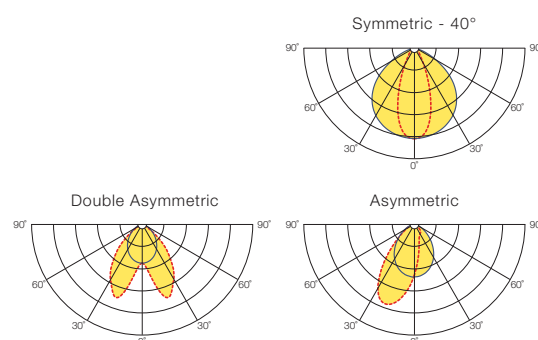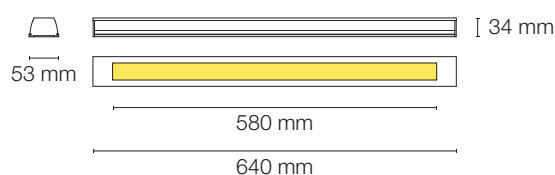

QUICK INFO

GENERAL

Module
IP20
650°C
Class I
Ta= -20°C +35°C

OPTIC

Clear PMMA Lens

LED

Efficacy up to 161 lm/W
2700 K, 3000 K, 4000 K
CRI >90
Lifetime 72 000 H
L80/B10 @TC=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9005 Textured Black

OPTIONS

LED

5000 K, 6500 K
RGB, RGBW

ELECTRICAL SYSTEM

DSI, DIM 1-10V

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours



SENSORS

Motion
Ambient Light
Motion & Ambient Light

VON V-LIGHT MODULE

MATT BLACK FINISHING

Beam Angle (°)	Output (lm)	System (W)	ON/OFF	DALI
2700 K				
Symmetric 40°	1201	12	35.42.90.00.132	35.42.90.00.138
	2476	25	35.42.90.00.135	35.42.90.00.141
Double Asymmetric	1215	12	35.42.90.00.131	35.42.90.00.137
	2503	25	35.42.90.00.134	35.42.90.00.140
Asymmetric	1151	12	35.42.90.00.130	35.42.90.00.136
	2373	25	35.42.90.00.133	35.42.90.00.139
3000 K				
Symmetric 40°	1372	12	35.42.90.00.156	35.42.90.00.162
	2589	25	35.42.90.00.159	35.42.90.00.165
Double Asymmetric	1387	12	35.42.90.00.155	35.42.90.00.161
	2617	25	35.42.90.00.158	35.42.90.00.164
Asymmetric	1315	12	35.42.90.00.154	35.42.90.00.160
	2481	25	35.42.90.00.157	35.42.90.00.163
4000 K				
Symmetric 40°	1432	12	35.42.90.00.180	35.42.90.00.186
	2702	25	35.42.90.00.183	35.42.90.00.189
Double Asymmetric	1448	12	35.42.90.00.179	35.42.90.00.185
	2732	25	35.42.90.00.182	35.42.90.00.188
Asymmetric	1373	12	35.42.90.00.178	35.42.90.00.184
	2589	25	35.42.90.00.181	35.42.90.00.187

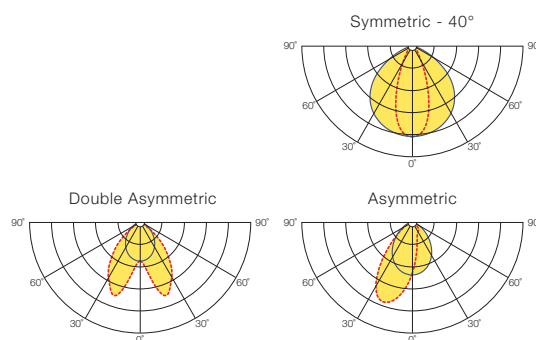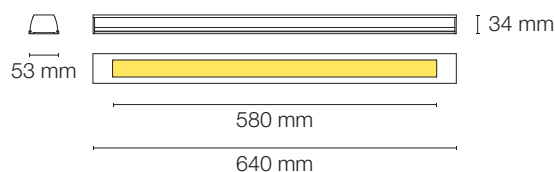




VON SPOT MODULE



EN

- > Module of directional mini-spotlights.
- > Designed for integration into VON surface, suspended, recessed trim or trimless mounting profiles.
- > Spotlights can be rotated 355° and swivelled 90°.
- > The integrated lens optics allow beam angles of 30° or 60°.
- > Modules are securely attached to the structural profile with a simple click.
- > Plug & play electrical connector system for quick module installation and position changes.
- > Textured finish aluminium body and spotlights.


VON DOUBLE SPOT



FR

- > Module de mini-projecteurs orientables.
- > Conçu pour l'intégration dans les profilées VON d'application apparente, suspendue ou encastrée avec et sans cadre.
- > Projecteurs peuvent tourner jusqu'à 355° et pivoter sur 90°.
- > L'optique de lentille intégrée permet des angles de diffusion de 30° ou 60°.
- > Les modules sont solidement fixés au profilé structurel en un simple clic.
- > Le système de branchement électrique rapide simplifie l'installation et les changements de position des modules.
- > Corps et projecteurs en aluminium finition texturé.

VON TRIPLE SPOT



QUICK INFO

GENERAL

Module
IP20
650°C
Class I
Ta= -20°C +35°C

OPTIC

Clear PMMA Lens

LED

Efficacy up to 129 lm/W
2700 K, 3000 K, 4000 K
CRI >90
Lifetime 80 000 H
L80/B10 @TC=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Textured White
RAL 9005 Textured Black

OPTIONS

LED

5000 K, 6500 K
RGB, RGBW

ELECTRICAL SYSTEM

DSI, DIM 1-10V

CONTROL SYSTEM

Bluetooth



FINISHING

Other Colours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

ROTATION

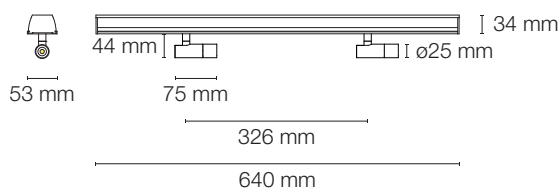


VON DOUBLE SPOT MODULE

MATT WHITE FINISHING

Beam Angle (°)	Output (lm)	System (W)	ON/OFF	DALI
2700 K				
30°	572	10	35.42.90.00.259	35.42.90.00.263
60°	539	10	35.42.90.00.261	35.42.90.00.265
3000 K				
30°	617	10	35.42.90.00.275	35.42.90.00.279
60°	583	10	35.42.90.00.277	35.42.90.00.281
4000 K				
30°	664	10	35.42.90.00.291	35.42.90.00.295
60°	627	10	35.42.90.00.293	35.42.90.00.297

MATT BLACK FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
2700 K				
30°	572	10	35.42.90.00.251	35.42.90.00.255
60°	539	10	35.42.90.00.253	35.42.90.00.257
3000 K				
30°	617	10	35.42.90.00.267	35.42.90.00.271
60°	583	10	35.42.90.00.269	35.42.90.00.273
4000 K				
30°	664	10	35.42.90.00.283	35.42.90.00.287
60°	627	10	35.42.90.00.285	35.42.90.00.289

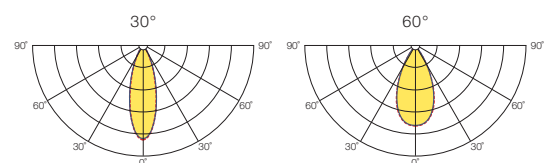

QUICK INFO

GENERAL

Module
IP20
650°C
Class I
Ta= -20°C +35°C

OPTIC

Clear PMMA Lens

LED

Efficacy up to 129 lm/W
2700 K, 3000 K, 4000 K
CRI >90
Lifetime 80 000 H
L80/B10 @TC=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Textured White
RAL 9005 Textured Black

OPTIONS

LED

5000 K, 6500 K
RGB, RGBW

ELECTRICAL SYSTEM

DSI, DIM 1-10V

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

VON TRIPLE SPOT MODULE




MATT WHITE FINISHING

Beam Angle (°)	Output (lm)	System (W)	ON/OFF	DALI
2700 K				
30°	808	15	35.42.90.00.211	35.42.90.00.215
60°	776	15	35.42.90.00.213	35.42.90.00.217
3000 K				
30°	872	15	35.42.90.00.227	35.42.90.00.231
60°	838	15	35.42.90.00.229	35.42.90.00.233
4000 K				
30°	938	15	35.42.90.00.243	35.42.90.00.247
60°	902	15	35.42.90.00.245	35.42.90.00.249

MATT BLACK FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
2700 K				
30°	808	15	35.42.90.00.203	35.42.90.00.207
60°	776	15	35.42.90.00.205	35.42.90.00.209
3000 K				
30°	872	15	35.42.90.00.219	35.42.90.00.223
60°	838	15	35.42.90.00.221	35.42.90.00.225
4000 K				
30°	938	15	35.42.90.00.235	35.42.90.00.239
60°	902	15	35.42.90.00.237	35.42.90.00.241

ROTATION

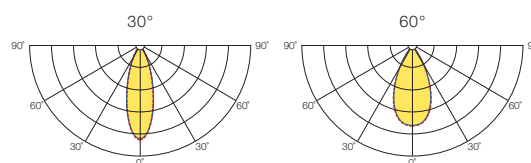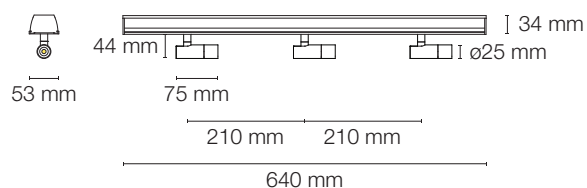



VON TUBE MODULE




EN

- > Module of pendant tube luminaires.
- > Designed for integration into VON surface, suspended, recessed trim or trimless mounting profiles.
- > The integrated lens optics allow beam angles of 30° or 60°.
- > Modules are securely attached to the structural profile with a simple click.
- > Plug & play electrical connector system for quick module installation and position changes.
- > Textured finish aluminium body and tubes.


FR

- > Module de suspensions tubulaires.
- > Conçu pour l'intégration dans les profilées VON d'application apparente, suspendue ou encastrée avec et sans cadre.
- > L'optique de lentille intégrée permet des angles de diffusion de 30° ou 60°.
- > Les modules sont solidement fixés au profilé structurel en un simple clic.
- > Le système de branchement électrique rapide simplifie l'installation et les changements de position des modules.
- > Corps et tubes en aluminium finition texturé.

VON DOUBLE TUBE



VON TRIPLE TUBE



QUICK INFO

GENERAL

Module

IP20

650°C

Class I

$$T_a = -20^{\circ}\text{C} + 35^{\circ}\text{C}$$

OPTIC

Clear PMMA Lens

LED

Efficacy up to 129 lm/W

2700 K, 3000 K, 4000 K

CRI >90

Lifetime 80 000 H

L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz

ON/OFF, DALI

FINISHING

RAL 9003 Textured White

RAL 9005 Textured Black

OPTIONS

LED

5000 K, 6500 K

RGB, RGBW

ELECTRICAL SYSTEM

DSI, DIM 1-10V

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

SENSORS

Motion

Ambient Light

Motion & Ambient Light



VON DOUBLE TUBE MODULE

MATT WHITE FINISHING

Beam Angle (°)	Output (lm)	System (W)	ON/OFF	DALI
2700 K				
30°	572	10	35.42.90.00.355	35.42.90.00.359
60°	539	10	35.42.90.00.357	35.42.90.00.361
3000 K				
30°	617	10	35.42.90.00.371	35.42.90.00.375
60°	583	10	35.42.90.00.373	35.42.90.00.377
4000 K				
30°	664	10	35.42.90.00.387	35.42.90.00.391
60°	627	10	35.42.90.00.389	35.42.90.00.393

MATT BLACK FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
2700 K				
30°	572	10	35.42.90.00.347	35.42.90.00.351
60°	539	10	35.42.90.00.349	35.42.90.00.353
3000 K				
30°	617	10	35.42.90.00.363	35.42.90.00.367
60°	583	10	35.42.90.00.365	35.42.90.00.369
4000 K				
30°	664	10	35.42.90.00.379	35.42.90.00.383
60°	627	10	35.42.90.00.381	35.42.90.00.385

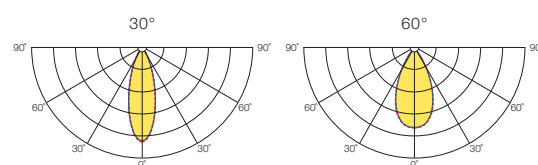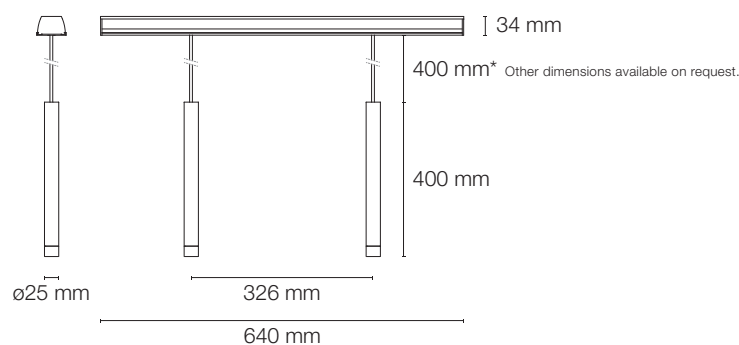

QUICK INFO

GENERAL

Module
IP20
650°C
Class I
Ta= -20°C +35°C

OPTIC

Clear PMMA Lens

LED

Efficacy up to 129 lm/W
2700 K, 3000 K, 4000 K
CRI >90
Lifetime 80 000 H
L80/B10 @TC=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Textured White
RAL 9005 Textured Black

OPTIONS

LED

5000 K, 6500 K
RGB, RGBW

ELECTRICAL SYSTEM

DSI, DIM 1-10V

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

SENSORS

Motion
Ambient Light
Motion & Ambient Light



VON TRIPLE TUBE MODULE

MATT WHITE FINISHING

Beam Angle (°)	Output (lm)	System (W)	ON/OFF	DALI
2700 K				
30°	808	15	35.42.90.00.307	35.42.90.00.311
60°	776	15	35.42.90.00.309	35.42.90.00.313
3000 K				
30°	872	15	35.42.90.00.323	35.42.90.00.327
60°	838	15	35.42.90.00.325	35.42.90.00.329
4000 K				
30°	938	15	35.42.90.00.339	35.42.90.00.343
60°	902	15	35.42.90.00.341	35.42.90.00.345

MATT BLACK FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
2700 K				
30°	808	15	35.42.90.00.299	35.42.90.00.303
60°	776	15	35.42.90.00.301	35.42.90.00.305
3000 K				
30°	872	15	35.42.90.00.315	35.42.90.00.319
60°	838	15	35.42.90.00.317	35.42.90.00.321
4000 K				
30°	938	15	35.42.90.00.331	35.42.90.00.335
60°	902	15	35.42.90.00.333	35.42.90.00.337

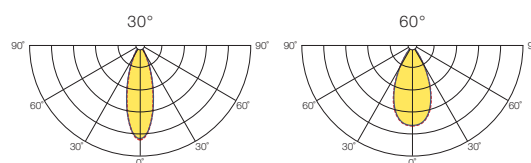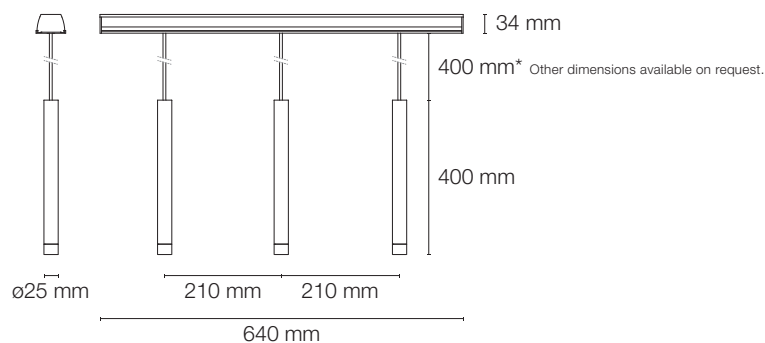



VON GLOBE MODULE




EN

- > Module with glass globes providing soft diffused light.
- > Designed for integration into VON surface, suspended, recessed trim or trimless mounting profiles.
- > Modules are securely attached to the structural profile with a simple click.
- > Plug & play electrical connector system for quick module installation and position changes.
- > Opal glass globes.
- > Textured finish aluminium body.

FR

- > Module avec globes en verre à lumière diffuse.
- > Conçu pour l'intégration dans les profilées VON d'application apparente, suspendue ou encastrée avec et sans cadre.
- > Les modules sont solidement fixés au profilé structurel en un simple clic.
- > Le système de branchement électrique rapide simplifie l'installation et les changements de position des modules.
- > Globes en verre Opale.
- > Corps en aluminium finition texturé.

VON DOUBLE GLOBE



VON TRIPLE GLOBE



QUICK INFO

GENERAL

Module
IP20
960°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Glass

LED

Efficacy up to 129 lm/W
2700 K, 3000 K, 4000 K
CRI >90
Lifetime 80 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Textured White
RAL 9005 Textured Black

VON DOUBLE GLOBE MODULE

MATT WHITE FINISHING

Output (lm)	System (W)	ON/OFF	DALI
2700 K			
335	10	35.42.90.00.408	35.42.90.00.409
3000 K			
362	10	35.42.90.00.412	35.42.90.00.413
4000 K			
390	10	35.42.90.00.416	35.42.90.00.417

MATT BLACK FINISHING

Output (lm)	System (W)	ON/OFF	DALI
2700 K			
335	10	35.42.90.00.406	35.42.90.00.407
3000 K			
362	10	35.42.90.00.410	35.42.90.00.411
4000 K			
390	10	35.42.90.00.414	35.42.90.00.415

OPTIONS

LED

5000 K, 6500 K
RGB, RGBW

ELECTRICAL SYSTEM

DSI, DIM 1-10V

CONTROL SYSTEM



Bluetooth

FINISHING

Other Colours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

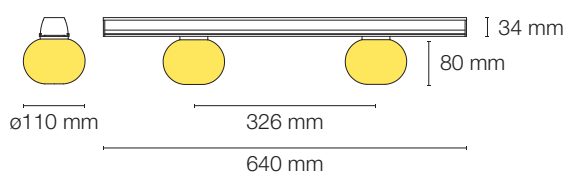

QUICK INFO

GENERAL

Module
IP20
960°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Glass

LED

Efficacy up to 129 lm/W
2700 K, 3000 K, 4000 K
CRI >90
Lifetime 80 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Textured White
RAL 9005 Textured Black

VON TRIPLE GLOBE MODULE

MATT WHITE FINISHING

Output (lm)	System (W)	ON/OFF	DALI
2700 K			
517	15	35.42.90.00.396	35.42.90.00.397
3000 K			
558	15	35.42.90.00.400	35.42.90.00.401
4000 K			
601	15	35.42.90.00.404	35.42.90.00.405

MATT BLACK FINISHING

Output (lm)	System (W)	ON/OFF	DALI
2700 K			
517	15	35.42.90.00.394	35.42.90.00.395
3000 K			
558	15	35.42.90.00.398	35.42.90.00.399
4000 K			
601	15	35.42.90.00.402	35.42.90.00.403

OPTIONS

LED

5000 K, 6500 K
RGB, RGBW

ELECTRICAL SYSTEM

DSI, DIM 1-10V

CONTROL SYSTEM



Bluetooth

FINISHING

Other Colours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

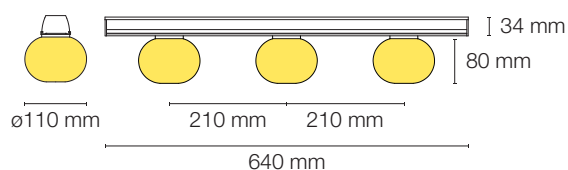



VON GLOBE S MODULE




EN

- > Module with glass pendant globes providing soft diffused light.
- > Designed for integration into VON surface, suspended, recessed trim or trimless mounting profiles.
- > Modules are securely attached to the structural profile with a simple click.
- > Plug & play electrical connector system for quick module installation and position changes.
- > Opal glass globes.
- > Textured finish aluminium body.


FR

- > Module avec globes suspendus en verre à lumière diffuse.
- > Conçu pour l'intégration dans les profilées VON d'application apparente, suspendue ou encastrée avec et sans cadre.
- > Les modules sont solidement fixés au profilé structurel en un simple clic.
- > Le système de branchement électrique rapide simplifie l'installation et les changements de position des modules.
- > Globes en verre Opale.
- > Corps en aluminium finition texturé.

VON DOUBLE GLOBE S



VON TRIPLE GLOBE S



QUICK INFO

GENERAL

Module
IP20
750°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Glass

LED

Efficacy up to 129 lm/W
2700 K, 3000 K, 4000 K
CRI >90
Lifetime 80 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Textured White
RAL 9005 Textured Black

VON DOUBLE GLOBE MODULE

MATT WHITE FINISHING

Output (lm)	System (W)	ON/OFF	DALI
2700 K			
410	10	35.42.90.00.432	35.42.90.00.433
3000 K			
442	10	35.42.90.00.436	35.42.90.00.437
4000 K			
476	10	35.42.90.00.440	35.42.90.00.441

MATT BLACK FINISHING

Output (lm)	System (W)	ON/OFF	DALI
2700 K			
410	10	35.42.90.00.430	35.42.90.00.431
3000 K			
442	10	35.42.90.00.434	35.42.90.00.435
4000 K			
476	10	35.42.90.00.438	35.42.90.00.439

OPTIONS

LED

5000 K, 6500 K
RGB, RGBW

ELECTRICAL SYSTEM

DSI, DIM 1-10V

CONTROL SYSTEM



Bluetooth

FINISHING

Other Colours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

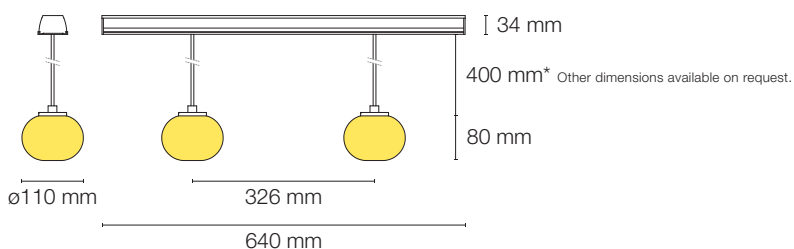

QUICK INFO

GENERAL

Module
IP20
750°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Glass

LED

Efficacy up to 129 lm/W
2700 K, 3000 K, 4000 K
CRI >90
Lifetime 80 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Textured White
RAL 9005 Textured Black

VON TRIPLE GLOBE MODULE

MATT WHITE FINISHING

Output (lm)	System (W)	ON/OFF	DALI
2700 K			
615	15	35.42.90.00.420	35.42.90.00.421
3000 K			
664	15	35.42.90.00.424	35.42.90.00.425
4000 K			
714	15	35.42.90.00.428	35.42.90.00.429

MATT BLACK FINISHING

Output (lm)	System (W)	ON/OFF	DALI
2700 K			
615	15	35.42.90.00.418	35.42.90.00.419
3000 K			
664	15	35.42.90.00.422	35.42.90.00.423
4000 K			
714	15	35.42.90.00.426	35.42.90.00.427

OPTIONS

LED

5000 K, 6500 K
RGB, RGBW

ELECTRICAL SYSTEM

DSI, DIM 1-10V

CONTROL SYSTEM



Bluetooth

FINISHING

 Other Colours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

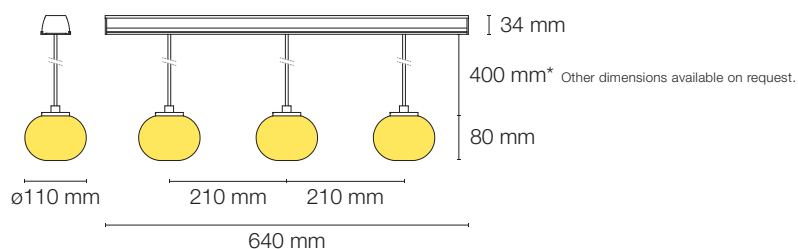



VON BLIND COVER MODULE



EN

- > Blind cover module allowing uniform finishing of the continuous line.
- > For closing intermediate spaces in the VON surface, suspended, recessed trim or trimless mounting profiles.
- > Blind covers are securely attached to the structural profile with a simple click.
- > Polycarbonate with two colour options and four pre-defined lengths.

FR

- > Module de cache de recouvrement permettant une finition uniforme de la ligne continue.
- > Pour fermeture des espaces intermédiaires dans les profilées VON d'application apparente, suspendue ou encastrée avec et sans cadre.
- > Les caches de recouvrement sont solidement fixés au profilé structurel en un simple clic.
- > En Polycarbonate avec deux options de couleur et quatre longueurs prédéfinies.

VON BLIND COVER



QUICK INFO

GENERAL
Module
850°C

FINISHING
RAL 9003 Textured White
RAL 9005 Textured Black


OPTIONS

FINISHING

 Other Colours

BLIND COVER

c (mm)	WHITE	BLACK
640	35.42.90.00.442	35.42.90.00.448
1280	35.42.90.00.443	35.42.90.00.449
1920	35.42.90.00.444	35.42.90.00.450
2560	35.42.90.00.445	35.42.90.00.451










VON

ORDER GUIDE

1 SELECT THE
PROFILE

2 SELECT THE
LENGTH / FINISHING

3 IF NEEDED, SELECT THE **CORNERS**
HORIZONTAL (H) CORNERS
VERTICAL (V) CORNERS

LINEAR		CORNERS	
SUSPENDED 	641 / 1281 / 1921 / 2561 mm (W) White (B) Black	605 x 605 mm (W) White (B) Black H-CORNER LIGHT / BLIND 	
			
SURFACE 	641 / 1281 / 1921 / 2561 mm (W) White (B) Black	605 x 605 mm (W) White (B) Black H-CORNER LIGHT / BLIND 	
			
RECESSED 	641 / 1281 / 1921 / 2561 mm (W) White (B) Black	613 x 613 mm (W) White (B) Black H-CORNER LIGHT / BLIND 	629 x 629 mm (W) White (B) Black V-CORNER LIGHT / BLIND 
			
TRIMLESS 	641 / 1281 / 1921 / 2561 mm (W) White	612 x 612 mm (W) White H-CORNER LIGHT / BLIND 	629 x 629 mm (W) White V-CORNER LIGHT / BLIND 
			

4 SELECT THE **MODULES**

(640 mm PER MODULE)

MODULES

C-LIGHT

Ⓜ White



I-LIGHT 12

Ⓜ White Ⓟ Black



I-LIGHT 24

Ⓜ White Ⓟ Black



V-LIGHT

Ⓜ White Ⓟ Black



DOUBLE SPOT

Ⓜ White Ⓟ Black



TRIPLE SPOT

Ⓜ White Ⓟ Black




DOUBLE TUBE

Ⓜ White Ⓟ Black




TRIPLE TUBE

Ⓜ White Ⓟ Black




DOUBLE GLOBE

Ⓜ White Ⓟ Black




TRIPLE GLOBE

Ⓜ White Ⓟ Black




DOUBLE GLOBE S

Ⓜ White Ⓟ Black



TRIPLE GLOBE S

Ⓜ White Ⓟ Black



BLIND COVER

Ⓜ White Ⓟ Black



DROP
SUSPENDED





> **DROP** SUSPENDED

DROP SUSPENDED



EN

- > Homogeneous lighting luminaire with direct light emission.
- > Minimalist aluminium profile with compact dimensions (33x75 mm).
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > External class II constant voltage Driver.
- > Opal PMMA diffuser.
- > Epoxy-polyester powder coated aluminium body.

FR

- > Luminaire d'éclairage homogène à émission directe du flux lumineux.
- > Profil d'aluminium ultra compacte (33x75 mm) au design minimaliste.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Driver externe à tension constante et classe de protection II.
- > Diffuseur en PMMA Opale.
- > Corps en aluminium avec revêtement époxy-polyester.

QUICK INFO
GENERAL

Suspended
IP40
750°C
Class III
Ta= -20°C +35°C

OPTIC

PMMA Opal

LED

Efficacy up to 124 lm/W
3000 K, 4000 K
CRI >80
Lifetime 60 000 H
L70/B10 @TC=65°C
24 VDC

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS
LED

2700 K, 5000 K, 6500 K
Tunable White, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

RAL 9005 Matt Black

 Other Colours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

DROP SUSPENDED
OPAL DIFFUSER

c (mm)	Output (lm)	LED Power (W)	MATT WHITE
3000 K			
1530	984	24	33.41.18.000075
2530	1640	40	33.41.18.000076
4000 K			
1530	984	21	33.41.18.000077
2530	1640	36	33.41.18.000078

COMPONENTS
SUSPENSION SYSTEM (2pcs)


TYPE	1m	3m	5m
Matt White	35.41.18.000602	35.41.18.000603	35.41.18.000604


RECESSED CEILING CUP (1pc)

TYPE	1m	3m	5m
Matt White Ø80 mm	35.41.18.000608	35.41.18.000609	35.41.18.000610





CLASS II

DRIVER - EXTERNAL

ON/OFF	DIMENSION	COD
Power Supply 4-32W IP20	21x40x220 mm	35.00.003.01.75
Power Supply 6-49W IP20	21x40x250 mm	35.00.003.01.74
Power Supply 12-86W IP20	21x40x300 mm	35.00.003.01.73
DALI	DIMENSION	COD
Power Supply 12-90W IP20	30x43x295 mm	35.00.003.01.76
Power Supply 18-135W IP20	31x43x325 mm	35.00.003.01.77

> External Driver to be housed nearby.

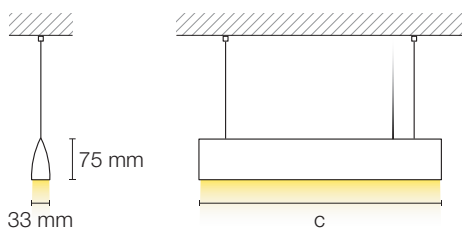


SNAP
SUSPENDED





> **SNAP** SUSPENDED

SNAP DIRECT LIGHT SUSPENDED

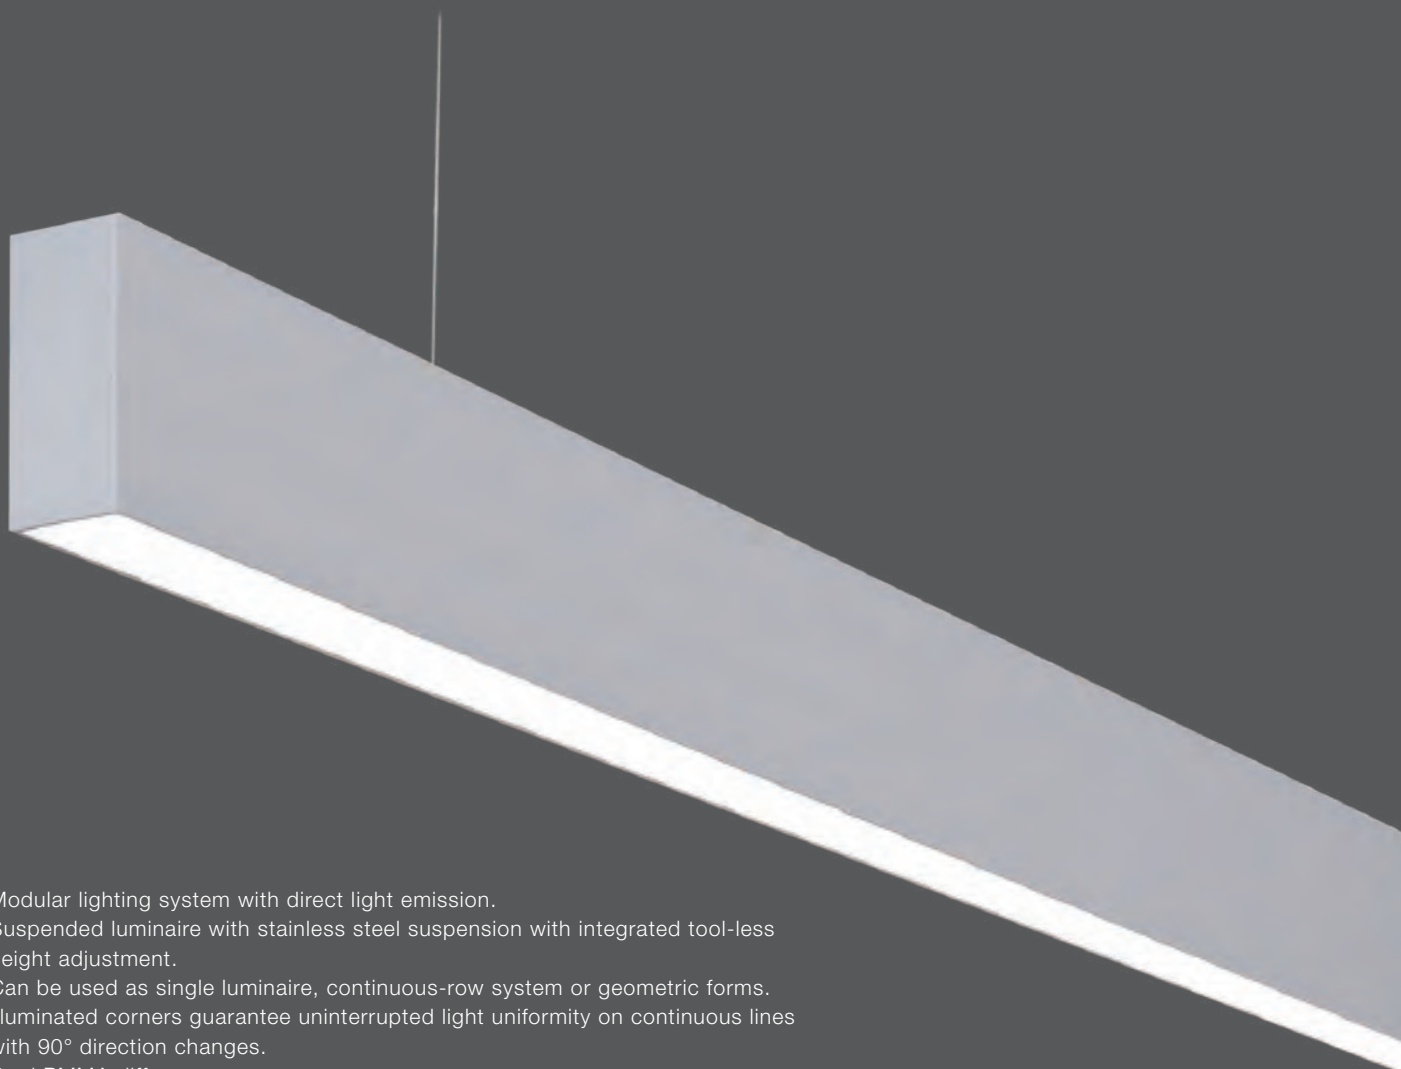

EN

- > Modular lighting system with direct light emission.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Can be used as single luminaire, continuous-row system or geometric forms.
- > Illuminated corners guarantee uninterrupted light uniformity on continuous lines with 90° direction changes.
- > Opal PMMA diffuser.
- > Extruded aluminium profile body.
- > Die-cast end caps without screws.

FR

- > Système modulaire d'éclairage à émission directe du flux lumineux.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Peut être utilisé comme luminaire individuel, système en ligne continue ou formes géométriques.
- > Les angles éclairés assurent une lumière uniforme sans interruption dans les lignes continues avec des changements de direction à 90°.
- > Diffuseur en PMMA Opale.
- > Corps en profil d'aluminium extrudé.
- > Embouts injectées et sans vis.

QUICK INFO
GENERAL

Suspended
IP40
IK04
750°C
Class I
Ta= -20°C +35°C

OPTIC

Opal PMMA

LED

Efficacy up to 188 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
Matt Anodized

**SNAP SUSPENDED - DIRECT LIGHT
OPAL DIFFUSER**
MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
852	1593	18	33.42.33.00.005	33.42.33.00.015
1134	2124	24	33.42.33.00.006	33.42.33.00.016
1415	2655	30	33.42.33.00.007	33.42.33.00.017
2258	4248	48	33.42.33.00.008	33.42.33.00.018
2539	4779	54	33.42.33.00.009	33.42.33.00.019
Corner 595x595	2124	24	33.42.33.00.501	33.42.33.00.503
4000 K				
852	1666	18	33.42.33.00.025	33.42.33.00.035
1134	2222	24	33.42.33.00.026	33.42.33.00.036
1415	2777	30	33.42.33.00.027	33.42.33.00.037
2258	4443	48	33.42.33.00.028	33.42.33.00.038
2539	4998	54	33.42.33.00.029	33.42.33.00.039
Corner 595x595	2222	24	33.42.33.00.505	33.42.33.00.507

OPTIONS
LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY



1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light


MATT ANODIZED FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
852	1593	18	33.42.33.00.000	33.42.33.00.010
1134	2124	24	33.42.33.00.001	33.42.33.00.011
1415	2655	30	33.42.33.00.002	33.42.33.00.012
2258	4248	48	33.42.33.00.003	33.42.33.00.013
2539	4779	54	33.42.33.00.004	33.42.33.00.014
Corner 595x595	2124	24	33.42.33.00.500	33.42.33.00.502
4000 K				
852	1666	18	33.42.33.00.020	33.42.33.00.030
1134	2222	24	33.42.33.00.021	33.42.33.00.031
1415	2777	30	33.42.33.00.022	33.42.33.00.032
2258	4443	48	33.42.33.00.023	33.42.33.00.033
2539	4998	54	33.42.33.00.024	33.42.33.00.034
Corner 595x595	2222	24	33.42.33.00.504	33.42.33.00.506

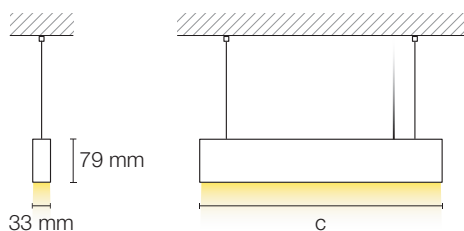

SNAP DIRECT LIGHT

SUSPENDED

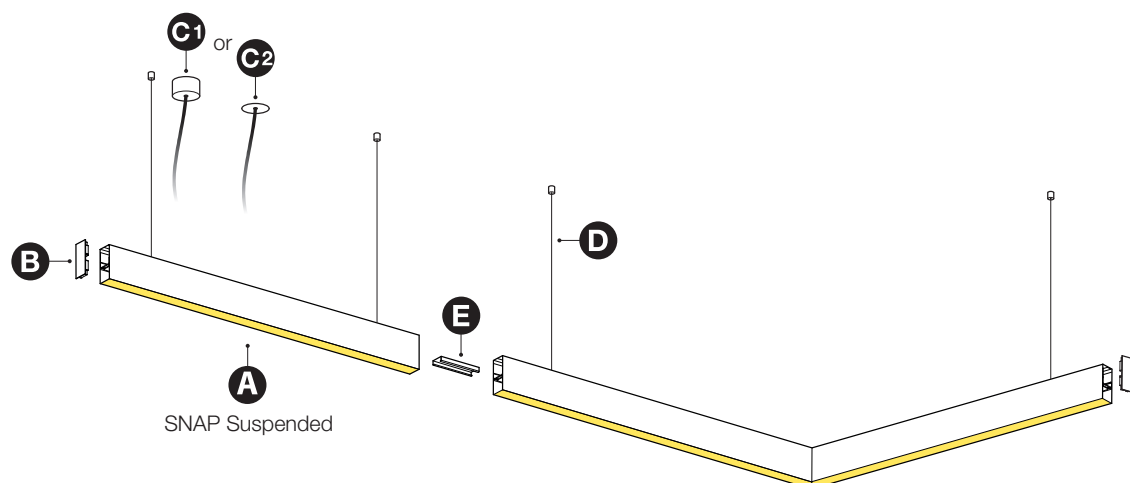

COMPONENTS



B END CAP (1pc)

	COD
Matt White	35.42.33.00.000
Matt Anodized Similar Painting	35.42.33.00.001



C1 SURFACE CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø62x36 mm	35.42.001.01.80	35.42.001.01.88	35.42.001.01.96
ON/OFF + EM	Ø62x36 mm	35.42.001.01.81	35.42.001.01.89	35.42.001.01.97
DALI	Ø62x36 mm	35.42.001.01.82	35.42.001.01.90	35.42.001.01.98
DALI + EM	Ø103x36 mm	35.42.001.01.83	35.42.001.01.91	35.42.001.01.99



C2 RECESSED CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø80 mm	35.42.001.01.84	35.42.001.01.92	35.42.002.01.00
ON/OFF + EM ON/OFF	Ø80 mm	35.42.001.01.85	35.42.001.01.93	35.42.002.01.01
DALI	Ø80 mm	35.42.001.01.86	35.42.001.01.94	35.42.002.01.02
DALI + EM DALI	Ø80 mm	35.42.001.01.87	35.42.001.01.95	35.42.002.01.03



D SUSPENSION SYSTEM (2pcs)

TYPE	1m	3m	5m
Matt White + Stainless Steel Cable	35.42.000.01.54	35.42.000.01.62	35.42.001.01.26



E LINEAR COUPLER (1pc)

Coupler

COD

35.42.33.10.000

OPTIONS



EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF

COD

EM 1H 3W

35.00.003.01.23*

DALI

COD

EM 1H 5,4W DALI

35.00.004.01.54*

* Applies to lengths equal to or greater than 1415 mm.

> On request – External Emergency. Box dimensions: 45x120x360 mm.



SNAP

DIRECT & INDIRECT LIGHT

SUSPENDED



EN

- > Modular lighting system with 70% direct and 30% indirect light distribution.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Can be used as single luminaire, continuous-row system or geometric forms.
- > Illuminated corners guarantee uninterrupted light uniformity on continuous lines with 90° direction changes.
- > Opal PMMA diffuser.
- > Extruded aluminium profile body.
- > Die-cast end caps without screws.

FR

- > Système modulaire d'éclairage à émission directe (70%) et indirecte (30%) du flux.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Peut être utilisé comme luminaire individuel, système en ligne continue ou formes géométriques.
- > Les angles éclairés assurent une lumière uniforme sans interruption dans les lignes continues avec des changements de direction à 90°.
- > Diffuseur en PMMA Opale.
- > Corps en profil d'aluminium extrudé.
- > Embouts injectées et sans vis.

QUICK INFO

GENERAL

Suspended
IP40
IK04
750°C
Class I
Ta= -20°C +35°C

OPTIC

Opal PMMA

LED

Efficacy up to 188 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI
Direct / Indirect - Simultaneous Control

FINISHING

RAL 9003 Matt White
Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut
Direct / Indirect - Separate Control

CONTROL SYSTEM

Bluetooth

FINISHING


Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

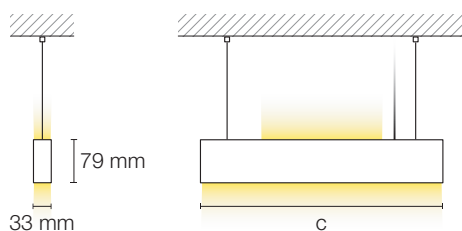

SNAP SUSPENDED - DIRECT & INDIRECT LIGHT OPAL DIFFUSER

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1415	3765	42	33.42.33.01.003	33.42.33.01.009
2258	6467	72	33.42.33.01.004	33.42.33.01.010
2539	7553	85	33.42.33.01.005	33.42.33.01.011
Corner 595x595 *	2124	24	33.42.33.01.501	33.42.33.01.503
4000 K				
1415	3938	42	33.42.33.01.015	33.42.33.01.021
2258	6765	72	33.42.33.01.016	33.42.33.01.022
2539	7900	85	33.42.33.01.017	33.42.33.01.023
Corner 595x595 *	2222	24	33.42.33.01.505	33.42.33.01.507

* Direct Light only.


MATT ANODIZED FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1415	3765	42	33.42.33.01.000	33.42.33.01.006
2258	6467	72	33.42.33.01.001	33.42.33.01.007
2539	7553	85	33.42.33.01.002	33.42.33.01.008
Corner 595x595 *	2124	24	33.42.33.01.500	33.42.33.01.502
4000 K				
1415	3938	42	33.42.33.01.012	33.42.33.01.018
2258	6765	72	33.42.33.01.013	33.42.33.01.019
2539	7900	85	33.42.33.01.014	33.42.33.01.020
Corner 595x595 *	2222	24	33.42.33.01.504	33.42.33.01.506

* Direct Light only.




Opal Diffuser

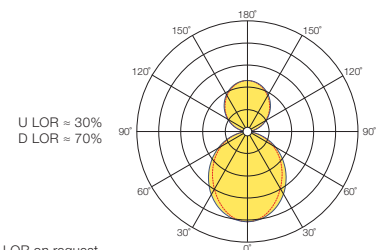

Other LOR on request.

SNAP DIRECT & INDIRECT LIGHT

SUSPENDED

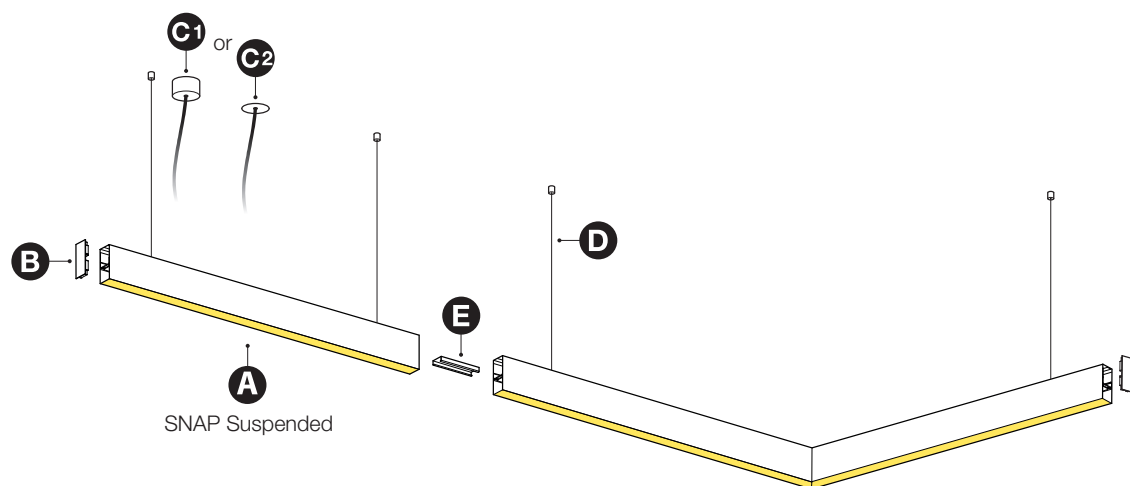

COMPONENTS



B END CAP (1pc)

	COD
Matt White	35.42.33.00.000
Matt Anodized Similar Painting	35.42.33.00.001



C1 SURFACE CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø62x36 mm	35.42.001.01.80	35.42.001.01.88	35.42.001.01.96
DALI	Ø62x36 mm	35.42.001.01.82	35.42.001.01.90	35.42.001.01.98



C2 RECESSED CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø80 mm	35.42.001.01.84	35.42.001.01.92	35.42.002.01.00
DALI	Ø80 mm	35.42.001.01.86	35.42.001.01.94	35.42.002.01.02



D SUSPENSION SYSTEM (2pcs)

TYPE	1m	3m	5m
Matt White + Stainless Steel Cable	35.42.000.01.54	35.42.000.01.62	35.42.001.01.26




E LINEAR COUPLER (1pc)

	COD
Coupler	35.42.33.10.000



ALPHA TRACK

SUSPENDED

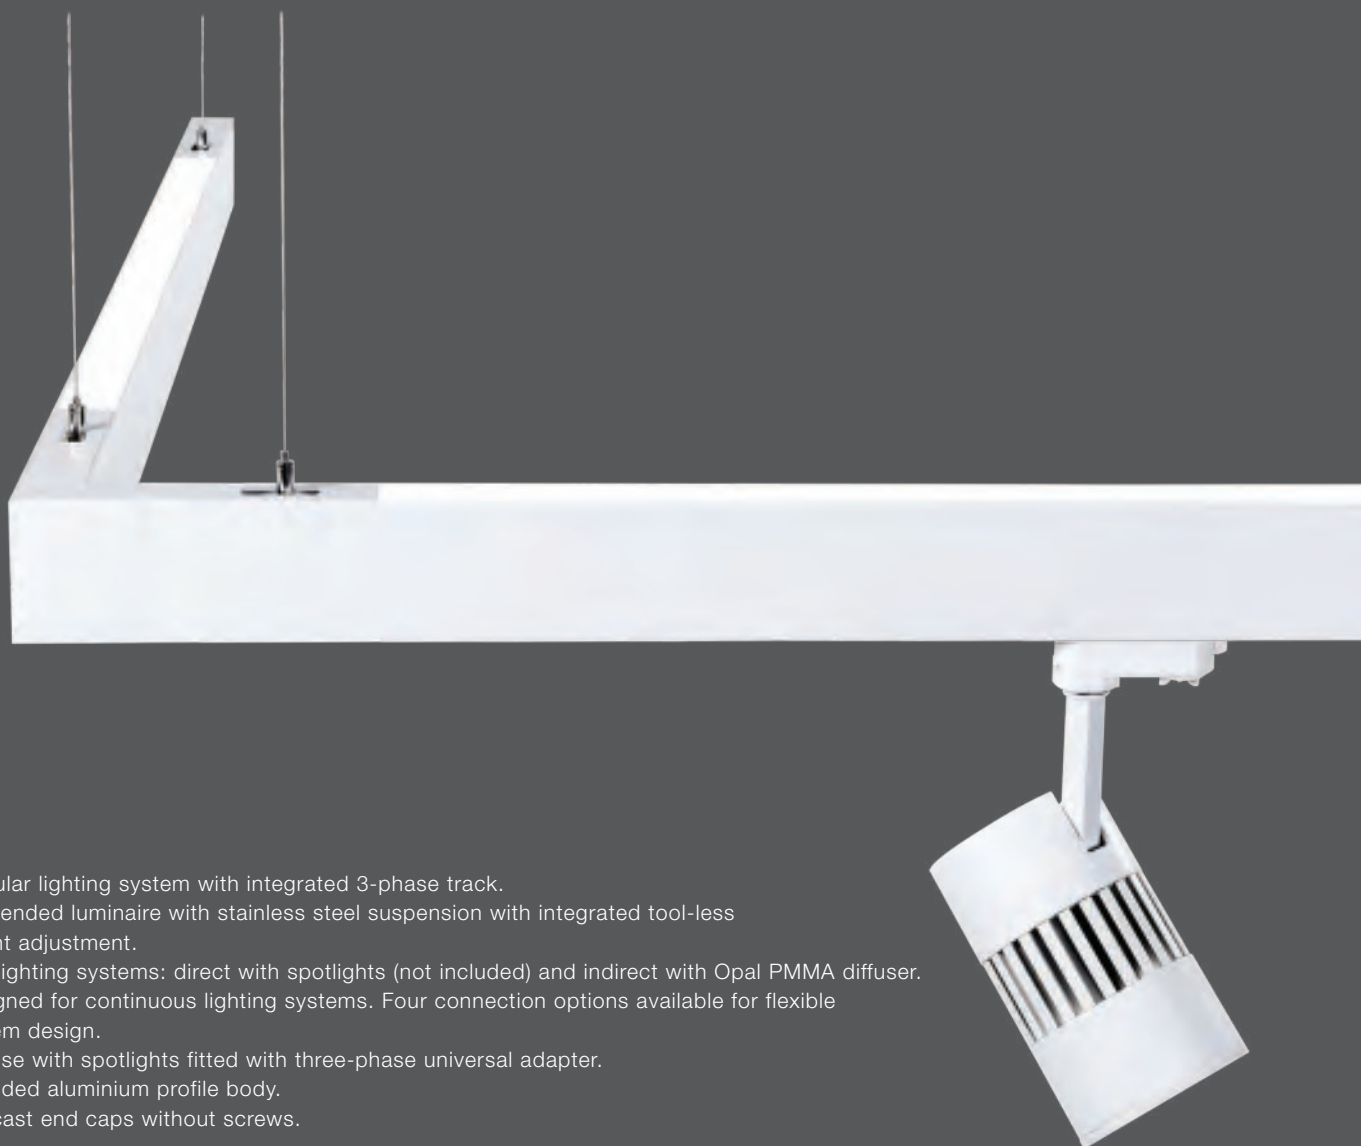

EN

- > Modular lighting system with integrated 3-phase track.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Two lighting systems: direct with spotlights (not included) and indirect with Opal PMMA diffuser.
- > Designed for continuous lighting systems. Four connection options available for flexible system design.
- > For use with spotlights fitted with three-phase universal adapter.
- > Extruded aluminium profile body.
- > Die-cast end caps without screws.

FR

- > Système modulaire d'éclairage avec rail triphasé intégrée.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Deux systèmes d'éclairage: Direct avec projecteurs (non inclus) et indirect avec diffuseur en PMMA Opale.
- > Quatre types de jonctions disponibles permettant des lignes continues en plusieurs configurations.
- > Permet l'application de projecteurs équipés d'adaptateur universel triphasé.
- > Corps en profil d'aluminium extrudé.
- > Embouts injectées et sans vis.

QUICK INFO

GENERAL

Suspended
IP20
IK04
750°C
Class I
Ta= -20°C +35°C

OPTIC

Opal PMMA (Indirect Light)

LED


Efficacy up to 188 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF - Track Ref. XTS
DALI - Track Ref. XTSC
Direct / Indirect - Separate Control

FINISHING

RAL 9003 Matt White
Metallic Grey



ALPHA TRACK SUSPENDED - PROFILE WITH INDIRECT LIGHT

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1995	1062	12	33.42.33.02.011	33.42.33.02.017
2995	2655	30	33.42.33.02.013	33.42.33.02.019
4000 K				
1995	1111	12	33.42.33.02.023	33.42.33.02.029
2995	2777	30	33.42.33.02.025	33.42.33.02.031

METALLIC GREY FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1995	1062	12	33.42.33.02.008	33.42.33.02.014
2995	2655	30	33.42.33.02.010	33.42.33.02.016
4000 K				
1995	1111	12	33.42.33.02.020	33.42.33.02.026
2995	2777	30	33.42.33.02.022	33.42.33.02.028

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING


 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light





ALPHA TRACK SUSPENDED - PROFILE

MATT WHITE FINISHING

c (mm)	ON/OFF	DALI
1995	33.42.33.02.002	33.42.33.02.006
2995	33.42.33.02.003	33.42.33.02.007


METALLIC GREY FINISHING

c (mm)	ON/OFF	DALI
1995	33.42.33.02.000	33.42.33.02.004
2995	33.42.33.02.001	33.42.33.02.005

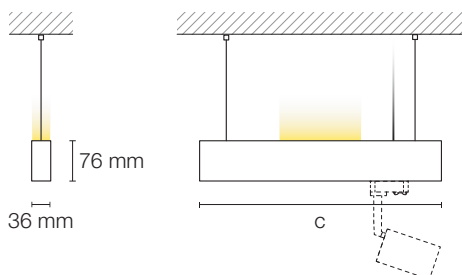

ALPHA TRACK

SUSPENDED

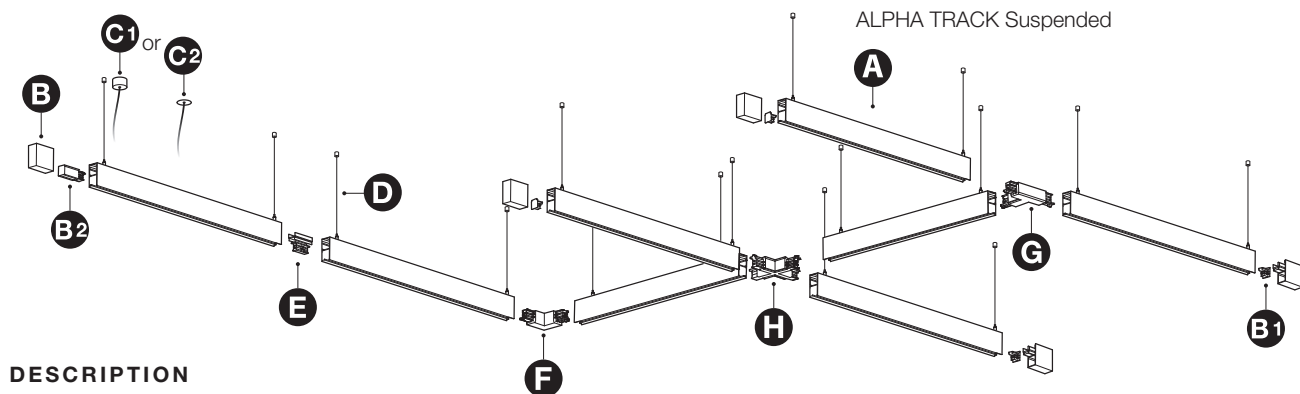

DESCRIPTION

— > Red Line indicates polarity.

⚡ > Feed Unit.

COMPONENTS



B END CAP (1pc)


MATT WHITE

METALLIC GREY

End Cap

35.42.33.02.001

35.42.33.02.000



B1 END CAP TRACK ADAPTER (1pc)

REF

MATT WHITE

REF

METALLIC GREY

End Cap Track Adapter

XTS 41-3

35.42.007.08.56

XTS 41-1

35.42.004.08.11



B2 END FEED TRACK ADAPTER (1pc)

REF

MATT WHITE

REF

METALLIC GREY

⚡ End Feed Track Adapter - Type 1

ON/OFF

XTS 11-3

35.42.007.08.52

XTS 11-1

35.42.004.08.07

DALI

XTSC 611-3

35.42.007.08.54

XTSC 611-1

35.42.004.08.09

⚡ End Feed Track Adapter - Type 2

ON/OFF

XTS 12-3

35.42.007.08.53

XTS 12-1

35.42.004.08.08

DALI

XTSC 612-3

35.42.007.08.55

XTSC 612-1

35.42.004.08.10

Type 1



Type 2



F "L" FEED (1pc)

REF

MATT WHITE

REF

METALLIC GREY

⚡ "L" Feed Track Adapter - Type 1

ON/OFF

XTS 34-3

35.42.33.02.006

XTS 34-1

35.42.33.02.002

DALI

XTSC 634-3

35.42.33.02.008

XTSC 634-1

35.42.33.02.004

⚡ "L" Feed Track Adapter - Type 2

ON/OFF

XTS 35-3

35.42.33.02.007

XTS 35-1

35.42.33.02.003

DALI

XTSC 635-3

35.42.33.02.009

XTSC 635-1

35.42.33.02.005

ON/OFF

DALI



Type 1




Type 2





G "T" FEED (1pc)

		REF	MATT WHITE	REF	METALLIC GREY
	"T" Feed Track Adapter - Type 1	ON/OFF	XTS 36-3 35.42.33.02.022	XTS 36-1	35.42.33.02.014
		DALI	XTSC 636-3 35.42.33.02.026	XTSC 636-1	35.42.33.02.018
	"T" Feed Track Adapter - Type 2	ON/OFF	XTS 37-3 35.42.33.02.023	XTS 37-1	35.42.33.02.015
		DALI	XTSC 637-3 35.42.33.02.027	XTSC 637-1	35.42.33.02.019
	"T" Feed Track Adapter - Type 3	ON/OFF	XTS 39-3 35.42.33.02.024	XTS 39-1	35.42.33.02.016
		DALI	XTSC 639-3 35.42.33.02.028	XTSC 639-1	35.42.33.02.020
	"T" Feed Track Adapter - Type 4	ON/OFF	XTS 40-3 35.42.33.02.025	XTS 40-1	35.42.33.02.017
		DALI	XTSC 640-3 35.42.33.02.029	XTSC 640-1	35.42.33.02.021


ON/OFF




DALI




Type 1




Type 2



Type 3



Type 4




H "X" FEED (1pc)

		REF	MATT WHITE	REF	METALLIC GREY
	"X" Feed Track Adapter	ON/OFF	XTS 38-3 35.42.33.02.012	XTS 38-1	35.42.33.02.010
		DALI	XTS 638-3 35.42.33.02.013	XTS 638-1	35.42.33.02.011

ON/OFF



DALI


E STRAIGHT CONNECTOR (1pc)

		REF	MATT WHITE	REF	METALLIC GREY
Straight Connector Track Adapter	ON/OFF	XTS 21-3	35.42.007.08.57	XTS 21-1	35.42.004.08.12
	DALI	XTSC 621-3	35.42.007.08.58	XTS 621-1	35.42.004.08.13


C1 SURFACE CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
1 - ON/OFF (Profile)	Ø103x36 mm	35.42.002.01.04	35.42.002.01.12	35.42.002.01.20
1 - ON/OFF (Profile with Indirect Light)	Ø103x36 mm	35.42.002.01.05	35.42.002.01.13	35.42.002.01.21
1 - DALI (Profile)	Ø103x36 mm	35.42.002.01.06	35.42.002.01.14	35.42.002.01.22
2 - DALI (Profile with Indirect Light)	Ø103x36 mm	35.42.002.01.07	35.42.002.01.15	35.42.002.01.23


C2 RECESSED CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
1 - ON/OFF (Profile)	Ø80 mm	35.42.002.01.08	35.42.002.01.16	35.42.002.01.24
1 - ON/OFF (Profile with Indirect Light)	Ø80 mm	35.42.002.01.09	35.42.002.01.17	35.42.002.01.25
1 - DALI (Profile)	Ø80 mm	35.42.002.01.10	35.42.002.01.18	35.42.002.01.26
2 - DALI (Profile with Indirect Light)	Ø80 mm	35.42.002.01.11	35.42.002.01.19	35.42.002.01.27


D SUSPENSION SYSTEM (2pcs)

TYPE	1m	3m	5m
Matt White + Stainless Steel Cable	35.42.000.01.54	35.42.000.01.62	35.42.001.01.26

SNAP SURFACE



EN

- > Modular lighting system for surface mounting.
- > Can be used as single luminaire, continuous-row system or geometric forms.
- > Illuminated corners guarantee uninterrupted light uniformity on continuous lines with 90° direction changes.
- > Opal PMMA diffuser.
- > Extruded aluminium profile body.
- > Die-cast end caps without screws.

FR

- > Système modulaire d'éclairage pour une application apparente.
- > Peut être utilisé comme luminaire individuel, système en ligne continue ou formes géométriques.
- > Les angles éclairés assurent une lumière uniforme sans interruption dans les lignes continues avec des changements de direction à 90°.
- > Diffuseur en PMMA Opale.
- > Corps en profil d'aluminium extrudé.
- > Embouts injectées et sans vis.

QUICK INFO

GENERAL

Surface
IP40
IK04
750°C
Class I
Ta= -20°C +35°C

OPTIC

Opal PMMA

LED

Efficacy up to 188 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
Matt Anodized

SNAP SURFACE

OPAL DIFFUSER

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
852	1593	18	33.42.33.10.005	33.42.33.10.015
1134	2124	24	33.42.33.10.006	33.42.33.10.016
1415	2655	30	33.42.33.10.007	33.42.33.10.017
2258	4248	48	33.42.33.10.008	33.42.33.10.018
2539	4779	54	33.42.33.10.009	33.42.33.10.019
Corner 595x595	2124	24	33.42.33.10.501	33.42.33.10.503
4000 K				
852	1666	18	33.42.33.10.025	33.42.33.10.035
1134	2222	24	33.42.33.10.026	33.42.33.10.036
1415	2777	30	33.42.33.10.027	33.42.33.10.037
2258	4443	48	33.42.33.10.028	33.42.33.10.038
2539	4998	54	33.42.33.10.029	33.42.33.10.039
Corner 595x595	2222	24	33.42.33.10.505	33.42.33.10.507

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY



1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light


MATT ANODIZED FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
852	1593	18	33.42.33.10.000	33.42.33.10.010
1134	2124	24	33.42.33.10.001	33.42.33.10.011
1415	2655	30	33.42.33.10.002	33.42.33.10.012
2258	4248	48	33.42.33.10.003	33.42.33.10.013
2539	4779	54	33.42.33.10.004	33.42.33.10.014
Corner 595x595	2124	24	33.42.33.10.500	33.42.33.10.502
4000 K				
852	1666	18	33.42.33.10.020	33.42.33.10.030
1134	2222	24	33.42.33.10.021	33.42.33.10.031
1415	2777	30	33.42.33.10.022	33.42.33.10.032
2258	4443	48	33.42.33.10.023	33.42.33.10.033
2539	4998	54	33.42.33.10.024	33.42.33.10.034
Corner 595x595	2222	24	33.42.33.10.504	33.42.33.10.506

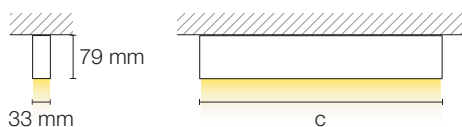

SNAP

SURFACE

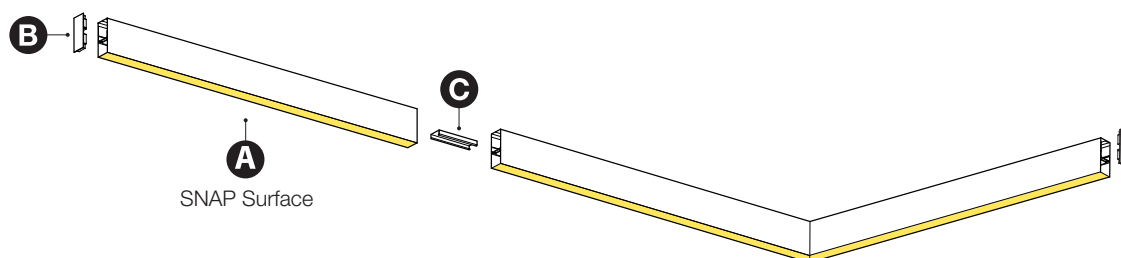

COMPONENTS



B END CAP (1pc)

COD

Matt White	35.42.33.00.000
Matt Anodized Similar Painting	35.42.33.00.001



C LINEAR COUPLER (1pc)

COD

Coupler	35.42.33.10.000
---------	-----------------

OPTIONS



EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF

COD

EM 1H 3W	35.00.003.01.23*
----------	------------------

DALI

COD


EM 1H 5,4W DALI	35.00.004.01.54*
-----------------	------------------

* Applies to lengths equal to or greater than 1415 mm.

> On request – External Emergency. Box dimensions: 45x120x360 mm.



SNAP MINI SURFACE

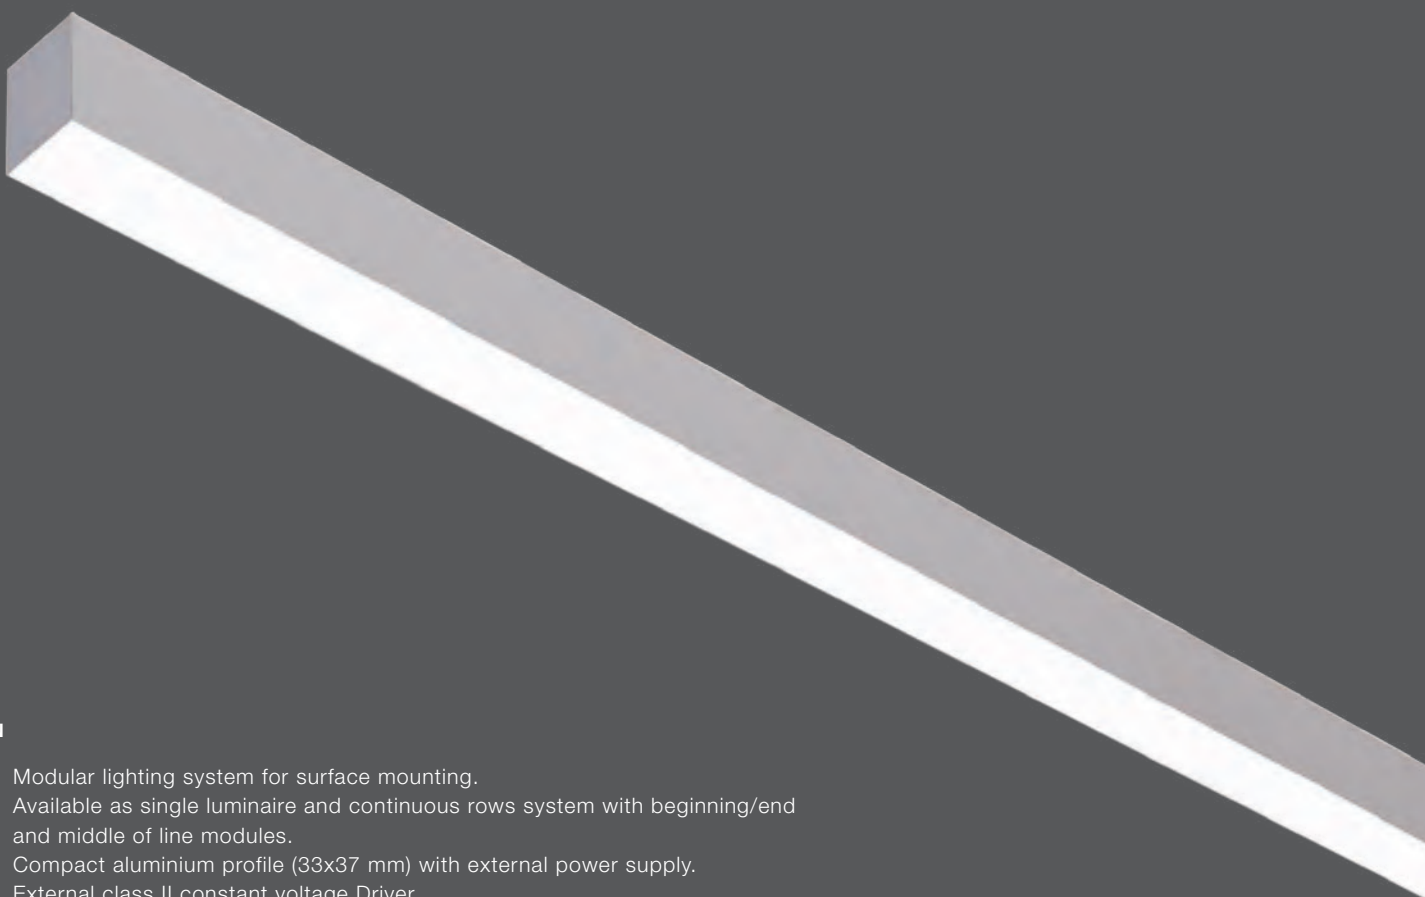

EN

- > Modular lighting system for surface mounting.
- > Available as single luminaire and continuous rows system with beginning/end and middle of line modules.
- > Compact aluminium profile (33x37 mm) with external power supply.
- > External class II constant voltage Driver.
- > Opal PMMA diffuser.
- > Extruded aluminium profile body.
- > Supplied with end caps and linear couplers.

FR

- > Système modulaire d'éclairage pour une application apparente.
- > Disponible comme luminaire individuel ou système pour l'installation en ligne continue avec modules de début/fin et milieu de ligne.
- > Profil d'aluminium ultra compacte (33x37 mm) avec source d'alimentation externe.
- > Driver externe à tension constante et classe de protection II.
- > Diffuseur en PMMA Opale.
- > Corps en profil d'aluminium extrudé.
- > Fourni avec embouts de fermeture et jonctions.

QUICK INFO

GENERAL

Surface
IP40
IK04
750°C
Class III
Ta= -20°C +35°C

OPTIC

Opal PMMA

LED

Efficacy up to 137 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L80/B10 @Tc=55°C
24 VDC

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
Matt Anodized

SNAP MINI SURFACE - INDIVIDUAL OPAL DIFFUSER

c (mm)	Output (lm)	LED Power (W)	LED Voltage	MATT WHITE	ANODIZED
3000 K					
432	244	5,5	24 VDC	33.42.33.11.006	33.42.33.11.000
832	489	11	24 VDC	33.42.33.11.007	33.42.33.11.001
1238	733	16,5	24 VDC	33.42.33.11.008	33.42.33.11.002
1640	977	22	24 VDC	33.42.33.11.009	33.42.33.11.003
2042	1221	27,5	24 VDC	33.42.33.11.010	33.42.33.11.004
2444	1466	33	24 VDC	33.42.33.11.011	33.42.33.11.005
4000 K					
432	244	5,5	24 VDC	33.42.33.11.018	33.42.33.11.012
832	489	11	24 VDC	33.42.33.11.019	33.42.33.11.013
1238	733	16,5	24 VDC	33.42.33.11.020	33.42.33.11.014
1640	977	22	24 VDC	33.42.33.11.021	33.42.33.11.015
2042	1221	27,5	24 VDC	33.42.33.11.022	33.42.33.11.016
2444	1466	33	24 VDC	33.42.33.11.023	33.42.33.11.017

COMPONENTS

DRIVER - EXTERNAL

ON/OFF	DIMENSION	COD
Power Supply 4-32W IP20	21x40x220 mm	35.00.003.01.75
Power Supply 6-49W IP20	21x40x250 mm	35.00.003.01.74
Power Supply 12-86W IP20	21x40x300 mm	35.00.003.01.73
DALI	DIMENSION	COD
Power Supply 12-90W IP20	30x43x295 mm	35.00.003.01.76
Power Supply 18-135W IP20	31x43x325 mm	35.00.003.01.77

> External Driver to be housed nearby.



CLASS II

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM




Bluetooth

FINISHING

Other Colours

SENSORS

Motion
Ambient Light
Motion & Ambient Light



QUICK INFO

GENERAL

Surface
IP40
IK04
750°C
Class III
Ta= -20°C +35°C

OPTIC

Opal PMMA

LED

Efficacy up to 137 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L80/B10 @TC=55°C
24 VDC

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
Matt Anodized

SNAP MINI SURFACE - CONTINUOUS LINE

OPAL DIFFUSER


BEGINNING/END OF LINE

c (mm)	Output (lm)	LED Power (W)	LED Voltage	MATT WHITE	ANODIZED
3000 K					
416	244	5,5	24 VDC	33.42.33.11.030	33.42.33.11.024
816	489	11	24 VDC	33.42.33.11.031	33.42.33.11.025
1222	733	16,5	24 VDC	33.42.33.11.032	33.42.33.11.026
1624	977	22	24 VDC	33.42.33.11.033	33.42.33.11.027
2026	1221	27,5	24 VDC	33.42.33.11.034	33.42.33.11.028
2428	1466	33	24 VDC	33.42.33.11.035	33.42.33.11.029
4000 K					
416	244	5,5	24 VDC	33.42.33.11.042	33.42.33.11.036
816	489	11	24 VDC	33.42.33.11.043	33.42.33.11.037
1222	733	16,5	24 VDC	33.42.33.11.044	33.42.33.11.038
1624	977	22	24 VDC	33.42.33.11.045	33.42.33.11.039
2026	1221	27,5	24 VDC	33.42.33.11.046	33.42.33.11.040
2428	1466	33	24 VDC	33.42.33.11.047	33.42.33.11.041


MIDDLE OF LINE

c (mm)	Output (lm)	LED Power (W)	LED Voltage	MATT WHITE	ANODIZED
3000 K					
403	244	5,5	24 VDC	33.42.33.11.506	33.42.33.11.500
803	489	11	24 VDC	33.42.33.11.507	33.42.33.11.501
1209	733	16,5	24 VDC	33.42.33.11.508	33.42.33.11.502
1611	977	22	24 VDC	33.42.33.11.509	33.42.33.11.503
2013	1221	27,5	24 VDC	33.42.33.11.510	33.42.33.11.504
2415	1466	33	24 VDC	33.42.33.11.511	33.42.33.11.505
Corner 210x210	244	5,5	24 VDC	33.42.33.11.526	33.42.33.11.524
4000 K					
403	244	5,5	24 VDC	33.42.33.11.518	33.42.33.11.512
803	489	11	24 VDC	33.42.33.11.519	33.42.33.11.513
1209	733	16,5	24 VDC	33.42.33.11.520	33.42.33.11.514
1611	977	22	24 VDC	33.42.33.11.521	33.42.33.11.515
2013	1221	27,5	24 VDC	33.42.33.11.522	33.42.33.11.516
2415	1466	33	24 VDC	33.42.33.11.523	33.42.33.11.517
Corner 210x210	244	5,5	24 VDC	33.42.33.11.527	33.42.33.11.525

BEGINNING/END OF LINE

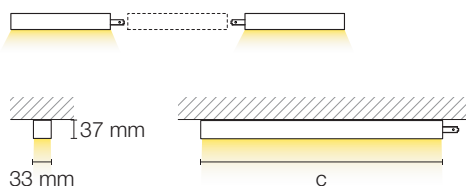

MIDDLE OF LINE

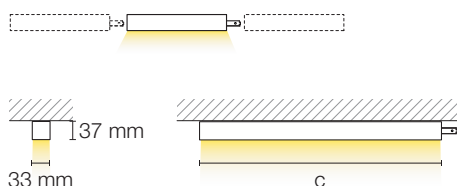

SNAP MINI SURFACE

COMPONENTS



CLASS II

DRIVER - EXTERNAL

ON/OFF	DIMENSION	COD
Power Supply 4-32W IP20	21x40x220 mm	35.00.003.01.75
Power Supply 6-49W IP20	21x40x250 mm	35.00.003.01.74
Power Supply 12-86W IP20	21x40x300 mm	35.00.003.01.73
DALI	DIMENSION	COD
Power Supply 12-90W IP20	30x43x295 mm	35.00.003.01.76
Power Supply 18-135W IP20	31x43x325 mm	35.00.003.01.77

> External Driver to be housed nearby.



GAP RECESSED



EN

- > Modular lighting system for recessed mounting.
- > Can be used as single luminaire, continuous-row system or geometric forms.
- > Illuminated corners guarantee uninterrupted light uniformity on continuous lines with 90° direction changes.
- > Opal PMMA diffuser.
- > Extruded aluminium profile body.

FR

- > Système modulaire d'éclairage pour application encastrée.
- > Peut être utilisé comme luminaire individuel, système en ligne continue ou formes géométriques.
- > Les angles éclairés assurent une lumière uniforme sans interruption dans les lignes continues avec des changements de direction à 90°.
- > Diffuseur en PMMA Opale.
- > Corps en profil d'aluminium extrudé.

QUICK INFO
GENERAL

Recessed
 IP43 (Optic)
 IP20
 IK04
 750°C
 Class I
 Ta= -20°C +35°C

OPTIC

Opal PMMA

LED

Efficacy up to 188 lm/W
 3000 K, 4000 K
 CRI >80
 Lifetime 72 000 H
 L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
 ON/OFF, DALI

FINISHING

RAL 9003 Matt White
 Matt Anodized

OPTIONS
GENERAL (Individual Luminaire)

IP44 (Optic)
 Class II

LED

2700 K, 5000 K, 6500 K
 Tunable White, RGB, RGBW
 CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING


Other Colours

EMERGENCY

1 Hour, 3 Hours
 DALI 1 Hour, 3 Hours

SENSORS

Motion
 Ambient Light
 Motion & Ambient Light

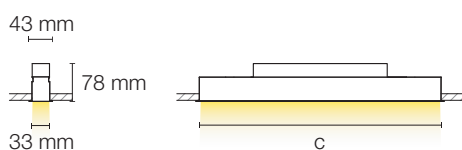

GAP RECESSED
OPAL DIFFUSER
MATT WHITE FINISHING


c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
857	1593	18	33.42.33.20.005	33.42.33.20.015
1138	2124	24	33.42.33.20.006	33.42.33.20.016
1419	2655	30	33.42.33.20.007	33.42.33.20.017
2262	4248	48	33.42.33.20.008	33.42.33.20.018
2543	4779	54	33.42.33.20.009	33.42.33.20.019
Corner 600x600	2124	24	33.42.33.20.501	33.42.33.20.503
4000 K				
857	1666	18	33.42.33.20.025	33.42.33.20.035
1138	2222	24	33.42.33.20.026	33.42.33.20.036
1419	2777	30	33.42.33.20.027	33.42.33.20.037
2262	4443	48	33.42.33.20.028	33.42.33.20.038
2543	4998	54	33.42.33.20.029	33.42.33.20.039
Corner 600x600	2222	24	33.42.33.20.505	33.42.33.20.507

MATT ANODIZED FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
857	1593	18	33.42.33.20.000	33.42.33.20.010
1138	2124	24	33.42.33.20.001	33.42.33.20.011
1419	2655	30	33.42.33.20.002	33.42.33.20.012
2262	4248	48	33.42.33.20.003	33.42.33.20.013
2543	4779	54	33.42.33.20.004	33.42.33.20.014
Corner 600x600	2124	24	33.42.33.20.500	33.42.33.20.502
4000 K				
857	1666	18	33.42.33.20.020	33.42.33.20.030
1138	2222	24	33.42.33.20.021	33.42.33.20.031
1419	2777	30	33.42.33.20.022	33.42.33.20.032
2262	4443	48	33.42.33.20.023	33.42.33.20.033
2543	4998	54	33.42.33.20.024	33.42.33.20.034
Corner 600x600	2222	24	33.42.33.20.504	33.42.33.20.506


ON REQUEST (INDIVIDUAL LUMINAIRE)

- > IP44 (OPTIC);
- > CLASS II;
- > EXTERNAL DRIVER:  45 mm



GAP

RECESSED

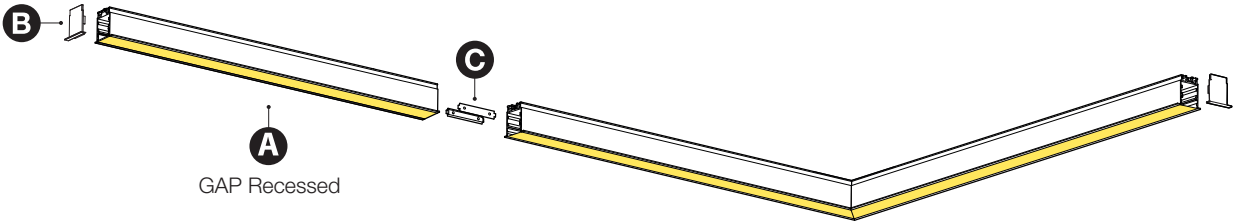

COMPONENTS



B END CAP (1pc)

COD

Matt White	35.42.33.20.000
Matt Anodized Similar Painting	35.42.33.20.001



C LINEAR COUPLER (2pcs)


COD

Coupler	35.42.33.20.002
---------	-----------------



GAP

TRIMLESS

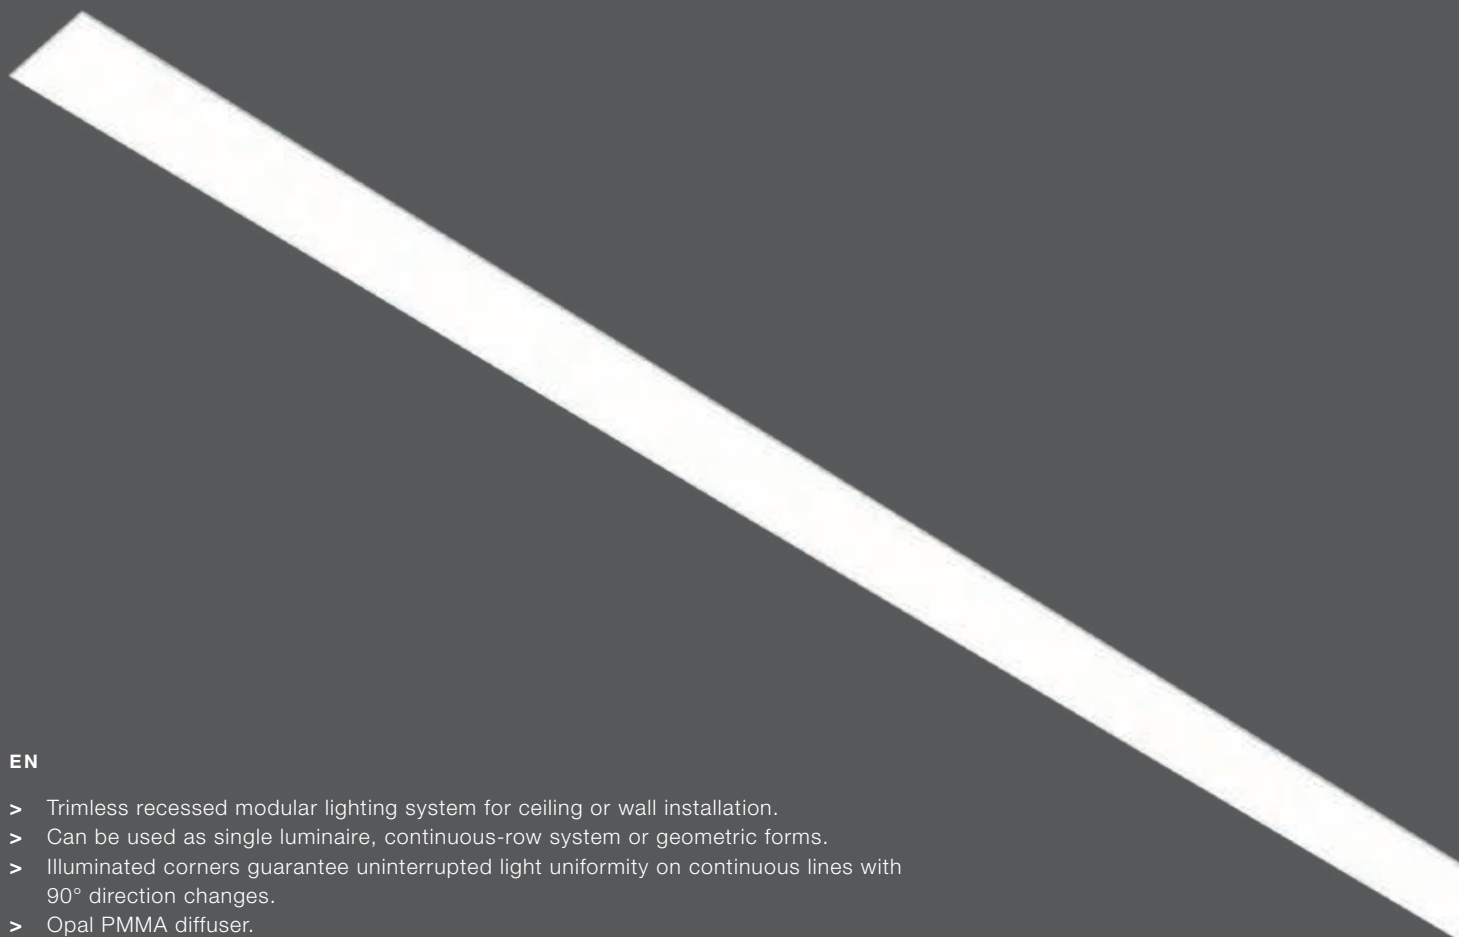

EN

- > Trimless recessed modular lighting system for ceiling or wall installation.
- > Can be used as single luminaire, continuous-row system or geometric forms.
- > Illuminated corners guarantee uninterrupted light uniformity on continuous lines with 90° direction changes.
- > Opal PMMA diffuser.
- > Extruded aluminium profile body.

FR

- > Système modulaire d'éclairage pour application encastrée sans cadre (trimless).
- > Peut être utilisé comme luminaire individuel, système en ligne continue ou formes géométriques.
- > Les angles éclairés assurent une lumière uniforme sans interruption dans les lignes continues avec des changements de direction à 90°.
- > Diffuseur en PMMA Opale.
- > Corps en profil d'aluminium extrudé.

QUICK INFO
GENERAL

Trimless
 IP43 (Optic)
 IP20
 IK04
 750°C
 Class I
 Ta= -20°C +35°C

OPTIC

Opal PMMA

LED

Efficacy up to 188 lm/W
 3000 K, 4000 K
 CRI >80
 Lifetime 72 000 H
 L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
 ON/OFF, DALI

FINISHING

RAL 9003 Matt White

GAP TRIMLESS
OPAL DIFFUSER
MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
847	1593	18	33.42.33.30.000	33.42.33.30.005
1128	2124	24	33.42.33.30.001	33.42.33.30.006
1409	2655	30	33.42.33.30.002	33.42.33.30.007
2252	4248	48	33.42.33.30.003	33.42.33.30.008
2533	4779	54	33.42.33.30.004	33.42.33.30.009
Corner 610x610	2124	24	33.42.33.30.500	33.42.33.30.501
4000 K				
847	1666	18	33.42.33.30.010	33.42.33.30.015
1128	2222	24	33.42.33.30.011	33.42.33.30.016
1409	2777	30	33.42.33.30.012	33.42.33.30.017
2252	4443	48	33.42.33.30.013	33.42.33.30.018
2533	4998	54	33.42.33.30.014	33.42.33.30.019
Corner 610x610	2222	24	33.42.33.30.502	33.42.33.30.503

OPTIONS
GENERAL (Individual Luminaire)

IP44 (Optic)
 Class II

LED

2700 K, 5000 K, 6500 K
 Tunable White, RGB, RGBW
 CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

EMERGENCY

1 Hour, 3 Hours
 DALI 1 Hour, 3 Hours

SENSORS

Motion
 Ambient Light
 Motion & Ambient Light

COMPONENTS
END CAP (1pc)



TYPE	COD
Matt White	35.42.33.30.001


LINEAR COUPLER (1pc)

TYPE	COD
Coupler	35.42.33.30.000

ON REQUEST (INDIVIDUAL LUMINAIRE)

- > IP44 (OPTIC);
- > CLASS II.

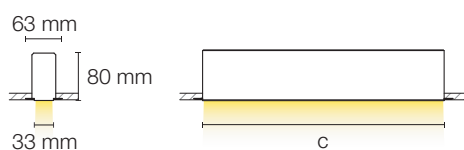

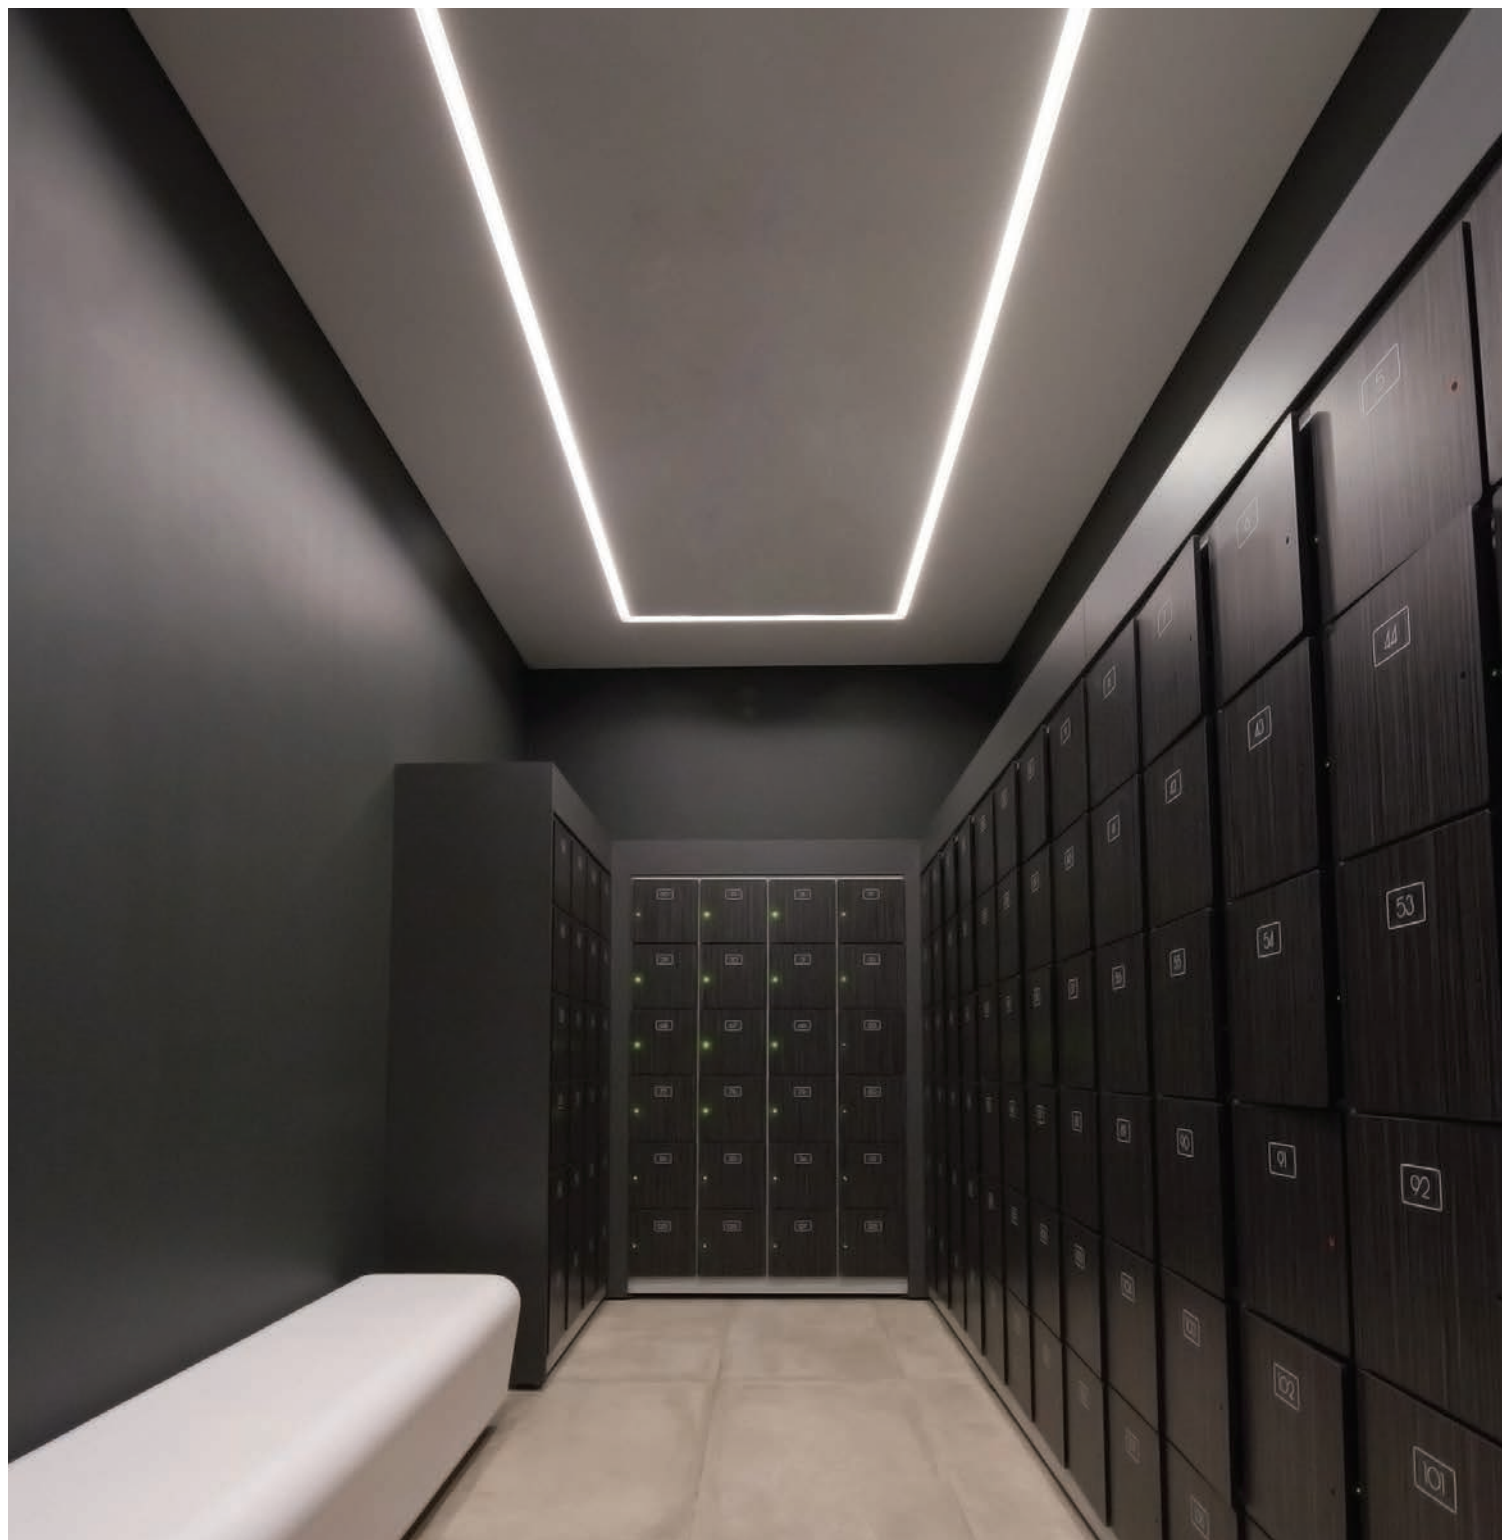

> **GAP** TRIMLESS



> **GAP** TRIMLESS

SNAP DIRECT OR INDIRECT LIGHT
WALL






SNAP

DIRECT OR INDIRECT LIGHT

WALL

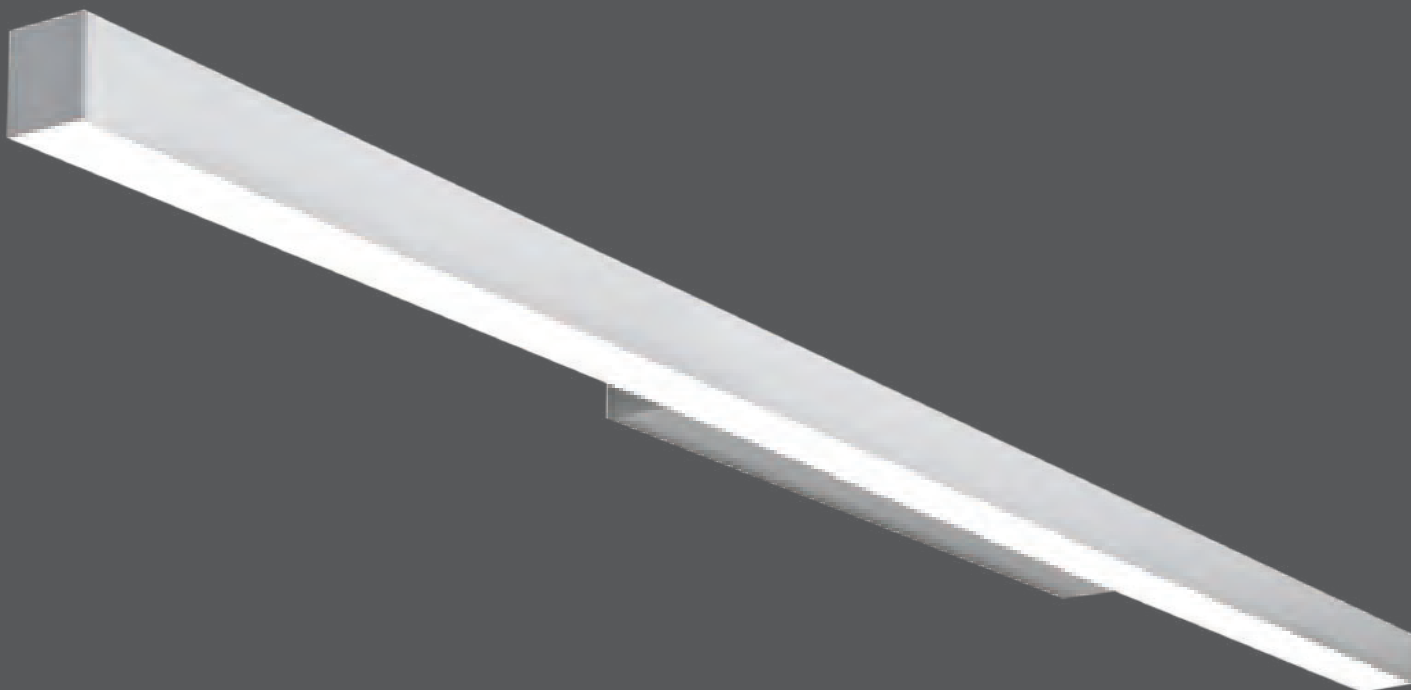

EN

- > Wall mounted luminaire with direct or indirect light output.
- > Direct or indirect light distribution defined by mounting.
- > PMMA Opal diffuser.
- > Extruded aluminium profile body.
- > Supplied with die-cast end caps without screws.

FR

- > Luminaire mural à émission directe ou indirecte du flux lumineux.
- > Émission directe ou indirect défini à l'application.
- > Diffuseur en PMMA Opale.
- > Corps en profil d'aluminium extrudé.
- > Fourni avec embouts injectées et sans vis.

DIRECT LIGHT



INDIRECT LIGHT



QUICK INFO

GENERAL

Wall
IP40
IK04
750°C
Class I
Ta= -20°C +35°C

OPTIC

Opal PMMA

LED

Efficacy up to 188 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

SENSORS

Motion
Ambient Light
Motion & AmbientLight

SNAP WALL - DIRECT OR INDIRECT LIGHT


OPAL DIFFUSER

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
590	1062	12	33.42.33.40.004	33.42.33.40.012
871	1593	18	33.42.33.40.005	33.42.33.40.013
1152	2124	24	33.42.33.40.006	33.42.33.40.014
1433	2655	30	33.42.33.40.007	33.42.33.40.015
4000 K				
590	1111	12	33.42.33.40.020	33.42.33.40.028
871	1666	18	33.42.33.40.021	33.42.33.40.029
1152	2222	24	33.42.33.40.022	33.42.33.40.030
1433	2777	30	33.42.33.40.023	33.42.33.40.031

MATT ANODIZED FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
590	1062	12	33.42.33.40.000	33.42.33.40.008
871	1593	18	33.42.33.40.001	33.42.33.40.009
1152	2124	24	33.42.33.40.002	33.42.33.40.010
1433	2655	30	33.42.33.40.003	33.42.33.40.011
4000 K				
590	1111	12	33.42.33.40.016	33.42.33.40.024
871	1666	18	33.42.33.40.017	33.42.33.40.025
1152	2222	24	33.42.33.40.018	33.42.33.40.026
1433	2777	30	33.42.33.40.019	33.42.33.40.027



SNAP

DIRECT & INDIRECT LIGHT

WALL



EN

- > Wall mounted luminaire with 70% direct and 30% indirect light distribution.
- > PMMA Opal diffuser.
- > Extruded aluminium profile body.
- > Supplied with die-cast end caps without screws.

FR

- > Luminaire mural à émission directe (70%) et indirecte (30%) du flux.
- > Diffuseur en PMMA Opale.
- > Corps en profil d'aluminium extrudé.
- > Fourni avec embouts injectées et sans vis.

DIRECT & INDIRECT LIGHT



QUICK INFO

GENERAL

Wall
IP40
750°C
Class I
Ta= -20°C +35°C

OPTIC

Opal PMMA

LED

Efficacy up to 188 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF
Direct / Indirect - Simultaneous Control

FINISHING

RAL 9003 Matt White
Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DALI, DSI, DIM 1-10V, Phase-cut
Direct / Indirect - Separate Control

CONTROL SYSTEM


Bluetooth

FINISHING

 Other Colours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

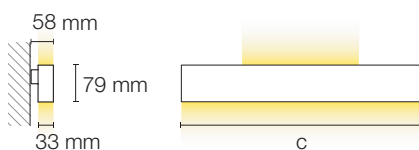


SNAP WALL - DIRECT & INDIRECT LIGHT OPAL DIFFUSER

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF
3000 K			
854	2124	24	33.42.33.41.003
1136	3186	36	33.42.33.41.004
1417	4248	48	33.42.33.41.005
4000 K			
854	2222	24	33.42.33.41.009
1136	3332	36	33.42.33.41.010
1417	4443	48	33.42.33.41.011


MATT ANODIZED FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF
3000 K			
854	2124	24	33.42.33.41.000
1136	3186	36	33.42.33.41.001
1417	4248	48	33.42.33.41.002
4000 K			
854	2222	24	33.42.33.41.006
1136	3332	36	33.42.33.41.007
1417	4443	48	33.42.33.41.008

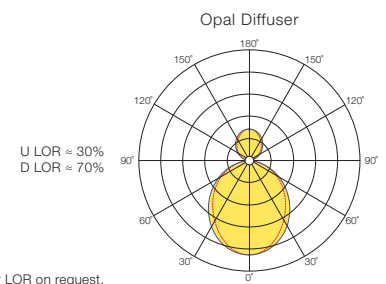


WELINE DIRECT LIGHT
SUSPENDED



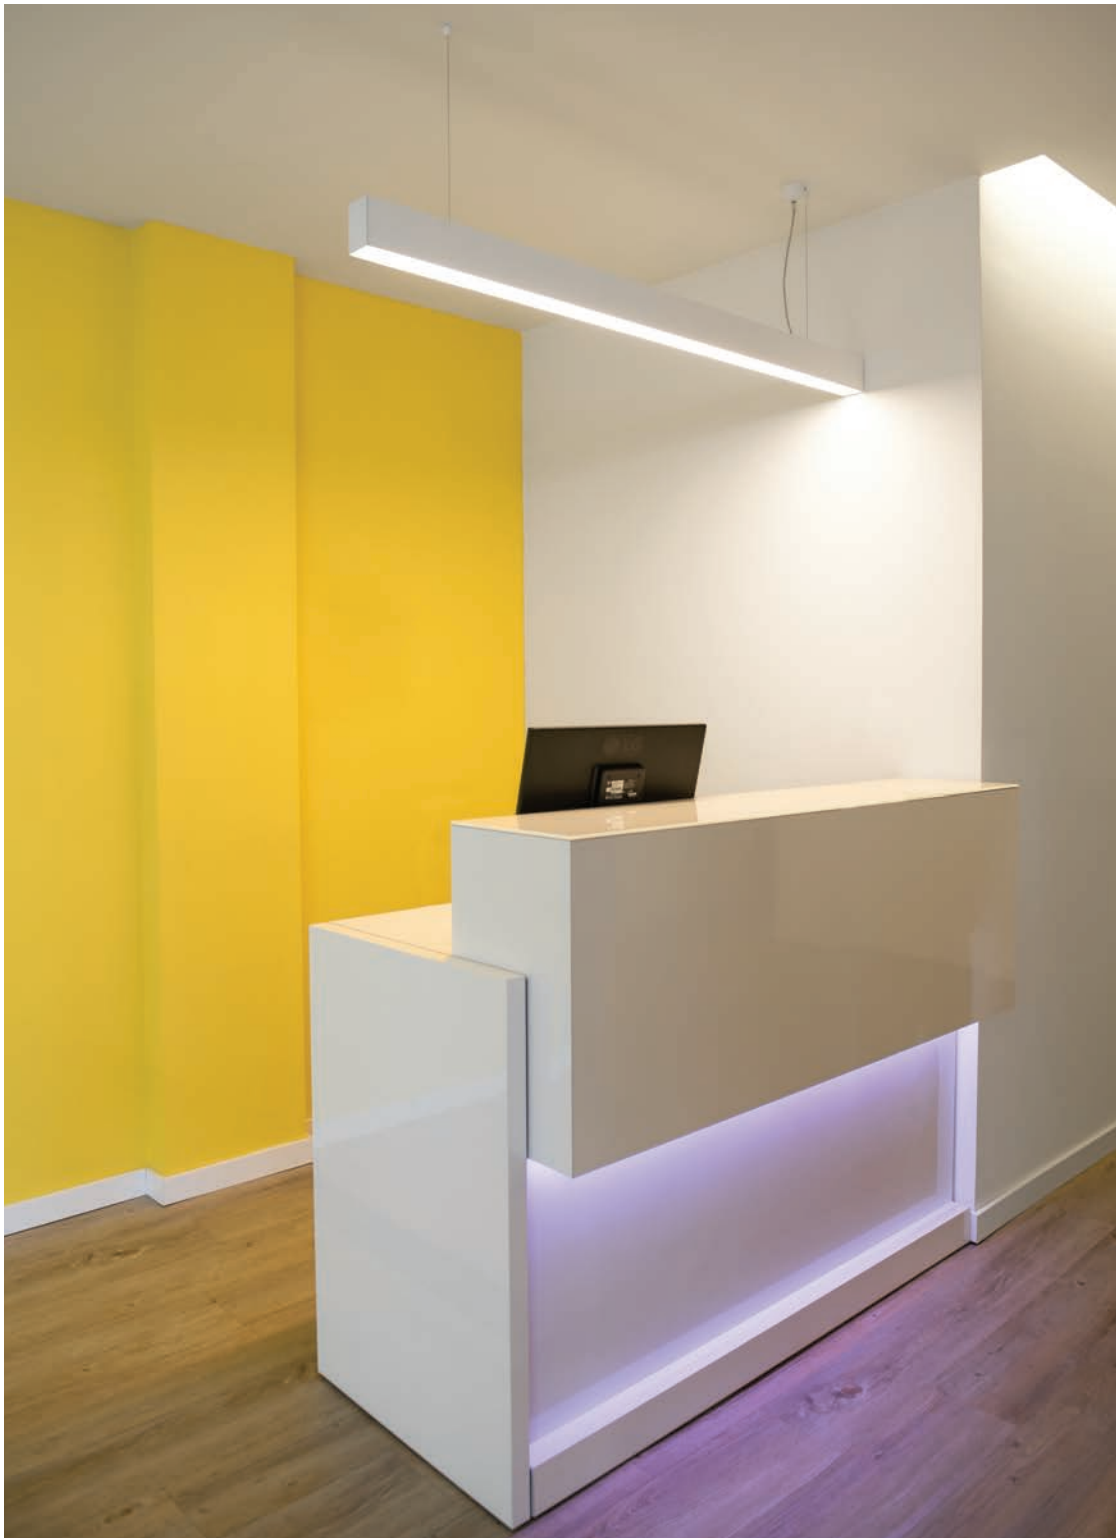

> **WELINE** SUSPENDED

WELINE DIRECT LIGHT SUSPENDED

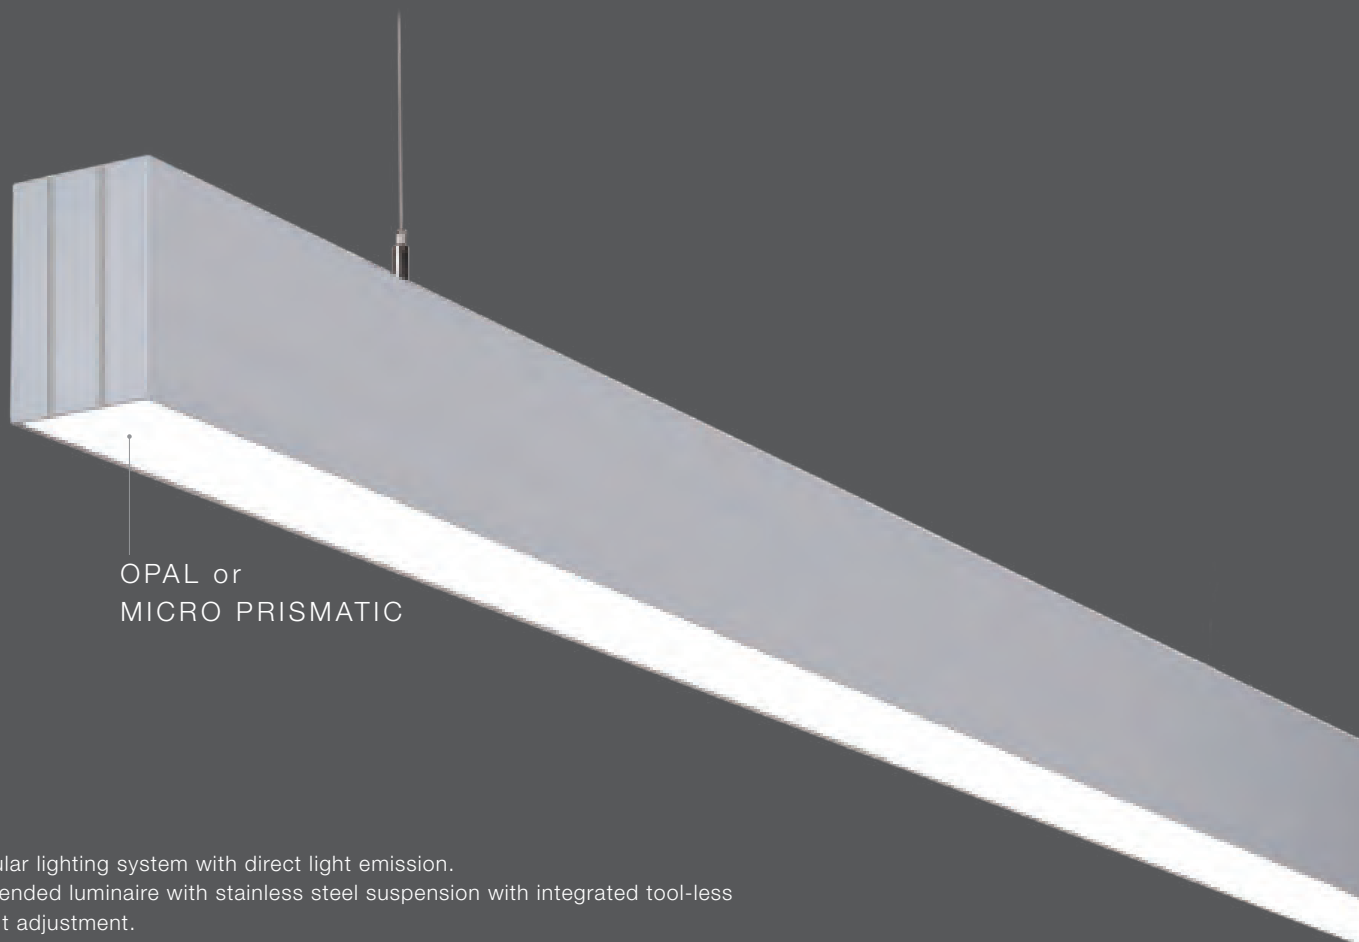

OPAL or
MICRO PRISMATIC

EN

- > Modular lighting system with direct light emission.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Can be used as single luminaire, continuous-row system or geometric forms.
- > Illuminated corners guarantee uninterrupted light uniformity on continuous lines with 90° direction changes.
- > Micro prismatic Polycarbonate diffuser for glare control (UGR <19) or Opal Polycarbonate diffuser.
- > Extruded aluminium profile body.
- > Die-cast end caps without screws.

FR

- > Système modulaire d'éclairage à émission directe du flux lumineux.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Peut être utilisé comme luminaire individuel, système en ligne continue ou formes géométriques.
- > Les angles éclairés assurent une lumière uniforme sans interruption dans les lignes continues avec des changements de direction à 90°.
- > Diffuseur en Polycarbonate Microprismatique pour contrôle de l'éblouissement (UGR <19) ou diffuseur Polycarbonate Opale.
- > Corps en profil d'aluminium extrudé.
- > Embouts injectées et sans vis.

QUICK INFO

GENERAL

Suspended
IP40
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 172 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White



WELINE SUSPENDED - DIRECT LIGHT

OPAL DIFFUSER

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
564	1241	13	33.42.55.00.012	33.42.55.00.072
	2480	25	33.42.55.00.018	33.42.55.00.078
845	1860	19	33.42.55.00.013	33.42.55.00.073
	3720	38	33.42.55.00.019	33.42.55.00.079
1126	2480	25	33.42.55.00.014	33.42.55.00.074
	4961	50	33.42.55.00.020	33.42.55.00.080
1407	3100	31	33.42.55.00.015	33.42.55.00.075
	6201	63	33.42.55.00.021	33.42.55.00.081
2250	4959	50	33.42.55.00.016	33.42.55.00.076
	9921	101	33.42.55.00.022	33.42.55.00.082
2812	6200	63	33.42.55.00.017	33.42.55.00.077
	12401	126	33.42.55.00.023	33.42.55.00.083
Corner 600x600	2480	25	33.42.55.00.502	33.42.55.00.512
	4961	50	33.42.55.00.503	33.42.55.00.513
4000 K				
564	1298	13	33.42.55.00.132	33.42.55.00.192
	2595	25	33.42.55.00.138	33.42.55.00.198
845	1947	19	33.42.55.00.133	33.42.55.00.193
	3893	38	33.42.55.00.139	33.42.55.00.199
1126	2595	25	33.42.55.00.134	33.42.55.00.194
	5190	50	33.42.55.00.140	33.42.55.00.200
1407	3244	31	33.42.55.00.135	33.42.55.00.195
	6488	63	33.42.55.00.141	33.42.55.00.201
2250	5190	50	33.42.55.00.136	33.42.55.00.196
	10381	101	33.42.55.00.142	33.42.55.00.202
2812	6489	63	33.42.55.00.137	33.42.55.00.197
	12976	126	33.42.55.00.143	33.42.55.00.203
Corner 600x600	2595	25	33.42.55.00.522	33.42.55.00.532
	5190	50	33.42.55.00.523	33.42.55.00.533

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.

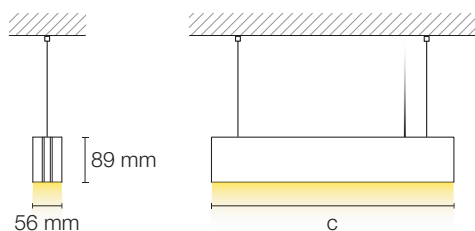

QUICK INFO

GENERAL

Suspended
IP40
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 172 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING


Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light



WELINE SUSPENDED - DIRECT LIGHT

OPAL DIFFUSER

MATT ANODIZED FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
564	1241	13	33.42.55.00.000	33.42.55.00.060
	2480	25	33.42.55.00.006	33.42.55.00.066
845	1860	19	33.42.55.00.001	33.42.55.00.061
	3720	38	33.42.55.00.007	33.42.55.00.067
1126	2480	25	33.42.55.00.002	33.42.55.00.062
	4961	50	33.42.55.00.008	33.42.55.00.068
1407	3100	31	33.42.55.00.003	33.42.55.00.063
	6201	63	33.42.55.00.009	33.42.55.00.069
2250	4959	50	33.42.55.00.004	33.42.55.00.064
	9921	101	33.42.55.00.010	33.42.55.00.070
2812	6200	63	33.42.55.00.005	33.42.55.00.065
	12401	126	33.42.55.00.011	33.42.55.00.071
Corner 600x600	2480	25	33.42.55.00.500	33.42.55.00.510
	4961	50	33.42.55.00.501	33.42.55.00.511
4000 K				
564	1298	13	33.42.55.00.120	33.42.55.00.180
	2595	25	33.42.55.00.126	33.42.55.00.186
845	1947	19	33.42.55.00.121	33.42.55.00.181
	3893	38	33.42.55.00.127	33.42.55.00.187
1126	2595	25	33.42.55.00.122	33.42.55.00.182
	5190	50	33.42.55.00.128	33.42.55.00.188
1407	3244	31	33.42.55.00.123	33.42.55.00.183
	6488	63	33.42.55.00.129	33.42.55.00.189
2250	5190	50	33.42.55.00.124	33.42.55.00.184
	10381	101	33.42.55.00.130	33.42.55.00.190
2812	6489	63	33.42.55.00.125	33.42.55.00.185
	12976	126	33.42.55.00.131	33.42.55.00.191
Corner 600x600	2595	25	33.42.55.00.520	33.42.55.00.530
	5190	50	33.42.55.00.521	33.42.55.00.531

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.

DESCRIPTION

- 1 > DRIVER
- 2 > LED BOARD
- 3 > LED COVER
- 4 > REFLECTOR
- 5 > DIFFUSER
- 6 > SUSPENSION



QUICK INFO

GENERAL

Suspended
IP40
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Micro Prismatic Polycarbonate
UGR <19

LED

Efficacy up to 182 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light


WELINE SUSPENDED - DIRECT LIGHT

MICRO PRISMATIC DIFFUSER - UGR <19

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
564	506	7	33.42.55.00.054	33.42.55.00.114
	816	13	33.42.55.00.042	33.42.55.00.102
	1630	25	33.42.55.00.048	33.42.55.00.108
845	759	11	33.42.55.00.055	33.42.55.00.115
	1223	19	33.42.55.00.043	33.42.55.00.103
	2446	38	33.42.55.00.049	33.42.55.00.109
1126	1012	15	33.42.55.00.056	33.42.55.00.116
	1630	25	33.42.55.00.044	33.42.55.00.104
	3262	50	33.42.55.00.050	33.42.55.00.110
1407	1265	18	33.42.55.00.057	33.42.55.00.117
	2038	31	33.42.55.00.045	33.42.55.00.105
	4077	63	33.42.55.00.051	33.42.55.00.111
2250	2023	29	33.42.55.00.058	33.42.55.00.118
	3261	50	33.42.55.00.046	33.42.55.00.106
	6523	101	33.42.55.00.052	33.42.55.00.112
2812	2529	37	33.42.55.00.059	33.42.55.00.119
	4076	63	33.42.55.00.047	33.42.55.00.107
	8154	126	33.42.55.00.053	33.42.55.00.113
Corner 600x600	1012	15	33.42.55.00.509	33.42.55.00.519
	1630	25	33.42.55.00.507	33.42.55.00.517
	3262	50	33.42.55.00.508	33.42.55.00.518
4000 K				
564	529	7	33.42.55.00.174	33.42.55.00.234
	854	13	33.42.55.00.162	33.42.55.00.222
	1706	25	33.42.55.00.168	33.42.55.00.228
845	794	11	33.42.55.00.175	33.42.55.00.235
	1280	19	33.42.55.00.163	33.42.55.00.223
	2559	38	33.42.55.00.169	33.42.55.00.229
1126	1058	15	33.42.55.00.176	33.42.55.00.236
	1706	25	33.42.55.00.164	33.42.55.00.224
	3413	50	33.42.55.00.170	33.42.55.00.230
1407	1323	18	33.42.55.00.177	33.42.55.00.237
	2133	31	33.42.55.00.165	33.42.55.00.225
	4266	63	33.42.55.00.171	33.42.55.00.231
2250	2117	29	33.42.55.00.178	33.42.55.00.238
	3413	50	33.42.55.00.166	33.42.55.00.226
	6825	101	33.42.55.00.172	33.42.55.00.232
2812	2646	37	33.42.55.00.179	33.42.55.00.239
	4266	63	33.42.55.00.167	33.42.55.00.227
	8532	126	33.42.55.00.173	33.42.55.00.233
Corner 600x600	1058	15	33.42.55.00.527	33.42.55.00.539
	1706	25	33.42.55.00.528	33.42.55.00.537
	3413	50	33.42.55.00.529	33.42.55.00.538

Micro Prismatic Diffuser - UGR<19



QUICK INFO

GENERAL

Suspended
IP40
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Micro Prismatic Polycarbonate
UGR <19

LED

Efficacy up to 182 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light


WELINE SUSPENDED - DIRECT LIGHT

MICRO PRISMATIC DIFFUSER - UGR <19

MATT ANODIZED FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
564	506	7	33.42.55.00.036	33.42.55.00.096
	816	13	33.42.55.00.024	33.42.55.00.084
	1630	25	33.42.55.00.030	33.42.55.00.090
845	759	11	33.42.55.00.037	33.42.55.00.097
	1223	19	33.42.55.00.025	33.42.55.00.085
	2446	38	33.42.55.00.031	33.42.55.00.091
1126	1012	15	33.42.55.00.038	33.42.55.00.098
	1630	25	33.42.55.00.026	33.42.55.00.086
	3262	50	33.42.55.00.032	33.42.55.00.092
1407	1265	18	33.42.55.00.039	33.42.55.00.099
	2038	31	33.42.55.00.027	33.42.55.00.087
	4077	63	33.42.55.00.033	33.42.55.00.093
2250	2023	29	33.42.55.00.040	33.42.55.00.100
	3261	50	33.42.55.00.028	33.42.55.00.088
	6523	101	33.42.55.00.034	33.42.55.00.094
2812	2529	37	33.42.55.00.041	33.42.55.00.101
	4076	63	33.42.55.00.029	33.42.55.00.089
	8154	126	33.42.55.00.035	33.42.55.00.095
Corner 600x600	1012	15	33.42.55.00.506	33.42.55.00.516
	1630	25	33.42.55.00.504	33.42.55.00.514
	3262	50	33.42.55.00.505	33.42.55.00.515
4000 K				
564	529	7	33.42.55.00.156	33.42.55.00.216
	854	13	33.42.55.00.144	33.42.55.00.204
	1706	25	33.42.55.00.150	33.42.55.00.210
845	794	11	33.42.55.00.157	33.42.55.00.217
	1280	19	33.42.55.00.145	33.42.55.00.205
	2559	38	33.42.55.00.151	33.42.55.00.211
1126	1058	15	33.42.55.00.158	33.42.55.00.218
	1706	25	33.42.55.00.146	33.42.55.00.206
	3413	50	33.42.55.00.152	33.42.55.00.212
1407	1323	18	33.42.55.00.159	33.42.55.00.219
	2133	31	33.42.55.00.147	33.42.55.00.207
	4266	63	33.42.55.00.153	33.42.55.00.213
2250	2117	29	33.42.55.00.160	33.42.55.00.220
	3413	50	33.42.55.00.148	33.42.55.00.208
	6825	101	33.42.55.00.154	33.42.55.00.214
2812	2646	37	33.42.55.00.161	33.42.55.00.221
	4266	63	33.42.55.00.149	33.42.55.00.209
	8532	126	33.42.55.00.155	33.42.55.00.215
Corner 600x600	1058	15	33.42.55.00.526	33.42.55.00.536
	1706	25	33.42.55.00.524	33.42.55.00.534
	3413	50	33.42.55.00.525	33.42.55.00.535

Micro Prismatic Diffuser - UGR<19






> **WELINE** SUSPENDED

WELINE DIRECT LIGHT

SUSPENDED

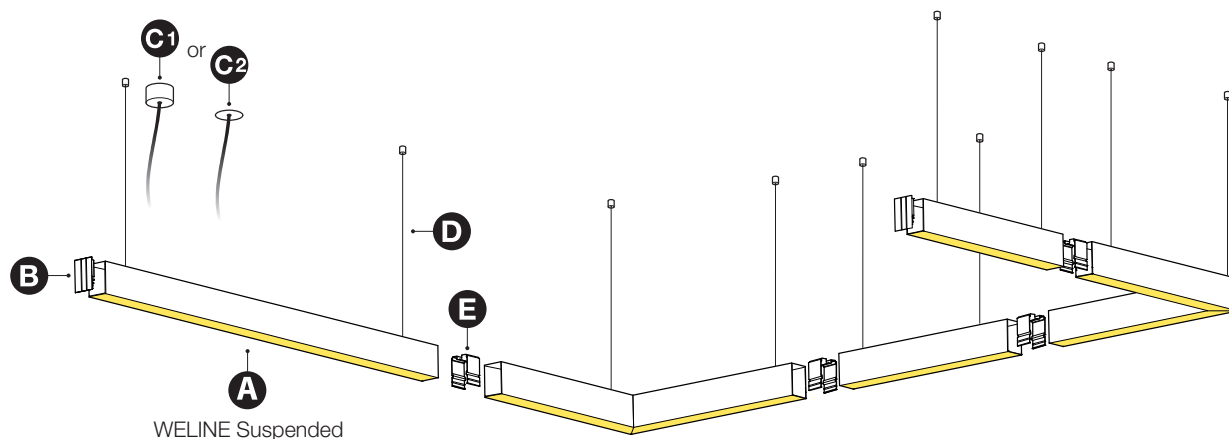

COMPONENTS



B END CAP (1pc)

COD

Matt White	35.42.55.00.000
Matt Anodized Similar Painting	35.42.55.00.001



C1 SURFACE CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø62x36 mm	35.42.001.01.80	35.42.001.01.88	35.42.001.01.96
ON/OFF + EM	Ø62x36 mm	35.42.001.01.81	35.42.001.01.89	35.42.001.01.97
DALI	Ø62x36 mm	35.42.001.01.82	35.42.001.01.90	35.42.001.01.98
DALI + EM	Ø103x36 mm	35.42.001.01.83	35.42.001.01.91	35.42.001.01.99



C2 RECESSED CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø80 mm	35.42.001.01.84	35.42.001.01.92	35.42.002.01.00
ON/OFF + EM	Ø80 mm	35.42.001.01.85	35.42.001.01.93	35.42.002.01.01
DALI	Ø80 mm	35.42.001.01.86	35.42.001.01.94	35.42.002.01.02
DALI + EM	Ø80 mm	35.42.001.01.87	35.42.001.01.95	35.42.002.01.03



D SUSPENSION SYSTEM (2pcs)

TYPE	1m	3m	5m
Matt White + Stainless Steel Cable	35.42.000.01.54	35.42.000.01.62	35.42.001.01.26



E LINEAR COUPLER (1pc)

COD

Coupler	35.42.55.00.005
---------	-----------------

OPTIONS




EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF	COD
EM 1H 3W	35.00.003.01.23*
EM 3H 3W	35.00.003.01.24**
DALI	COD
EM 1H 5,4W DALI	35.00.004.01.54*
EM 3H 5,4W DALI	35.00.004.01.55**

* Applies to lengths equal to or greater than 1126 mm. ** Applies to lengths equal to or greater than 1407 mm.
 > On request – External Emergency. Box dimensions: 45x120x360 mm.



WELINE IP54 DIRECT LIGHT SUSPENDED

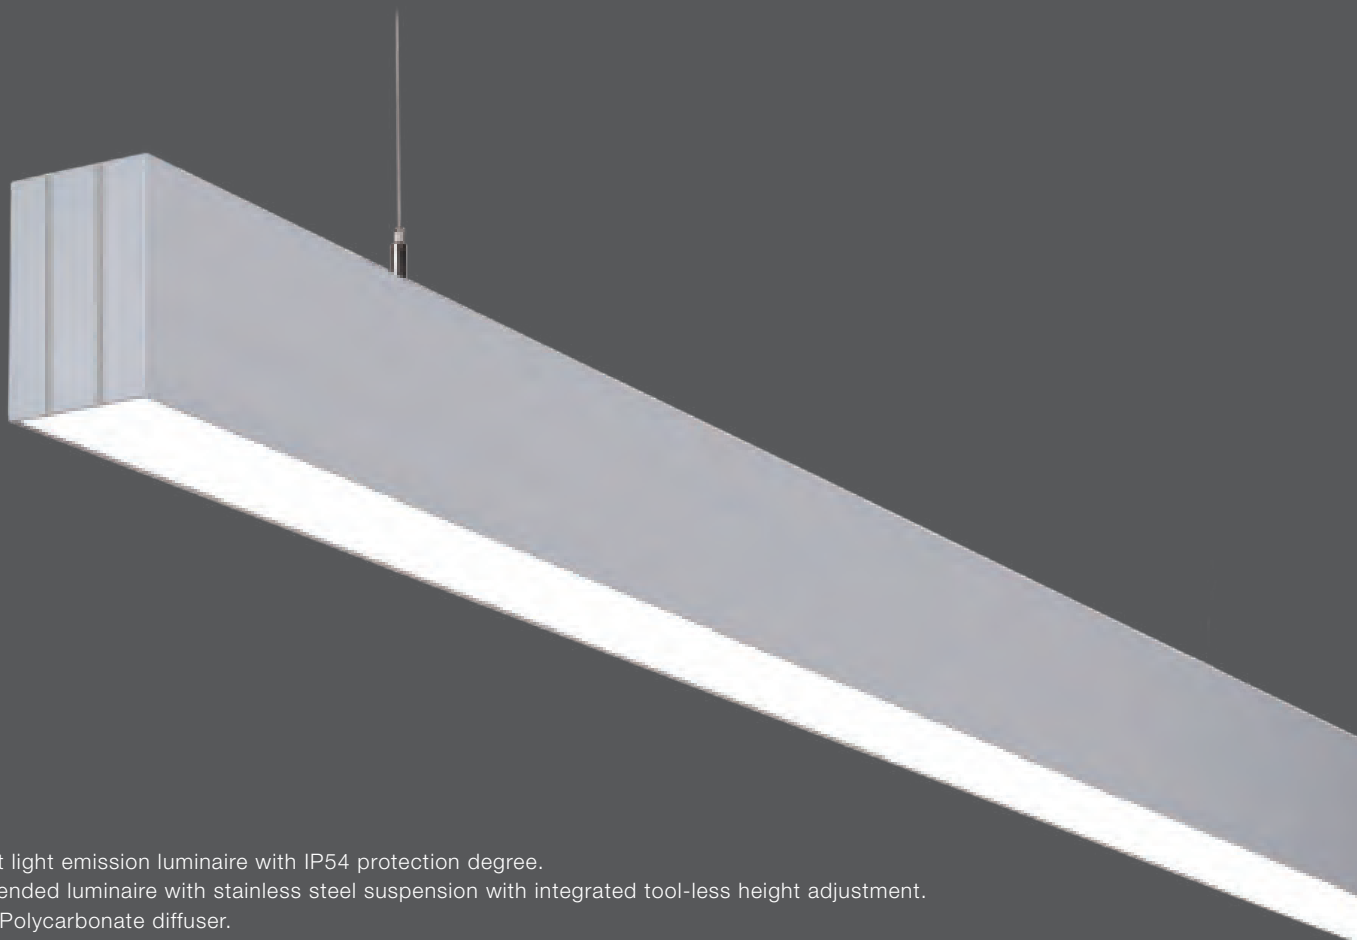

EN

- > Direct light emission luminaire with IP54 protection degree.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Opal Polycarbonate diffuser.
- > Extruded aluminium profile body.
- > Supplied with die-cast end caps without screws.

FR

- > Luminaire à émission directe du flux lumineux avec degré de protection IP54.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Diffuseur en Polycarbonate Opale.
- > Corps en profil d'aluminium extrudé.
- > Fourni avec embouts injectées et sans vis.

QUICK INFO

GENERAL

Suspended
IP54
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 172 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours



SENSORS

Motion
Ambient Light
Motion & Ambient Light

WELINE IP54 SUSPENDED - DIRECT LIGHT OPAL DIFFUSER

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
570	979	13	33.42.55.01.012	33.42.55.01.060
	1957	25	33.42.55.01.018	33.42.55.01.066
850	1468	19	33.42.55.01.013	33.42.55.01.061
	2936	38	33.42.55.01.019	33.42.55.01.067
1131	1957	25	33.42.55.01.014	33.42.55.01.062
	3915	50	33.42.55.01.020	33.42.55.01.068
1412	2446	31	33.42.55.01.015	33.42.55.01.063
	4893	63	33.42.55.01.021	33.42.55.01.069
2252	3914	50	33.42.55.01.016	33.42.55.01.064
	7830	101	33.42.55.01.022	33.42.55.01.070
2817	4893	63	33.42.55.01.017	33.42.55.01.065
	9787	126	33.42.55.01.023	33.42.55.01.071
4000 K				
570	1025	13	33.42.55.01.108	33.42.55.01.156
	2048	25	33.42.55.01.114	33.42.55.01.162
850	1536	19	33.42.55.01.109	33.42.55.01.157
	3072	38	33.42.55.01.115	33.42.55.01.163
1131	2048	25	33.42.55.01.110	33.42.55.01.158
	4096	50	33.42.55.01.116	33.42.55.01.164
1412	2560	31	33.42.55.01.111	33.42.55.01.159
	5120	63	33.42.55.01.117	33.42.55.01.165
2252	4096	50	33.42.55.01.112	33.42.55.01.160
	8192	101	33.42.55.01.118	33.42.55.01.166
2817	5121	63	33.42.55.01.113	33.42.55.01.161
	10240	126	33.42.55.01.119	33.42.55.01.167

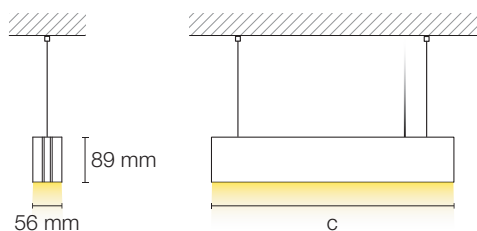

QUICK INFO

GENERAL

Suspended
IP54
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 172 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING


 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light




WELINE IP54 SUSPENDED - DIRECT LIGHT OPAL DIFFUSER

MATT ANODIZED FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
570	979	13	33.42.55.01.000	33.42.55.01.048
	1957	25	33.42.55.01.006	33.42.55.01.054
850	1468	19	33.42.55.01.001	33.42.55.01.049
	2936	38	33.42.55.01.007	33.42.55.01.055
1131	1957	25	33.42.55.01.002	33.42.55.01.050
	3915	50	33.42.55.01.008	33.42.55.01.056
1412	2446	31	33.42.55.01.003	33.42.55.01.051
	4893	63	33.42.55.01.009	33.42.55.01.057
2252	3914	50	33.42.55.01.004	33.42.55.01.052
	7830	101	33.42.55.01.010	33.42.55.01.058
2817	4893	63	33.42.55.01.005	33.42.55.01.053
	9787	126	33.42.55.01.011	33.42.55.01.059
4000 K				
570	1025	13	33.42.55.01.096	33.42.55.01.144
	2048	25	33.42.55.01.102	33.42.55.01.150
850	1536	19	33.42.55.01.097	33.42.55.01.145
	3072	38	33.42.55.01.103	33.42.55.01.151
1131	2048	25	33.42.55.01.098	33.42.55.01.146
	4096	50	33.42.55.01.104	33.42.55.01.152
1412	2560	31	33.42.55.01.099	33.42.55.01.147
	5120	63	33.42.55.01.105	33.42.55.01.153
2252	4096	50	33.42.55.01.100	33.42.55.01.148
	8192	101	33.42.55.01.106	33.42.55.01.154
2817	5121	63	33.42.55.01.101	33.42.55.01.149
	10240	126	33.42.55.01.107	33.42.55.01.155

DESCRIPTION

- 1 > DRIVER
2 > REFLECTOR + LED BOARD
3 > DIFFUSER
4 > SUSPENSION

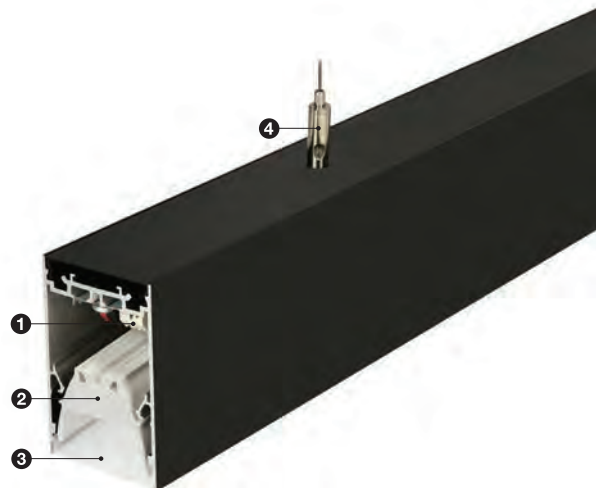

WELINE IP54 DIRECT LIGHT

SUSPENDED

COMPONENTS



SURFACE CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø62x36 mm	35.42.001.01.80	35.42.001.01.88	35.42.001.01.96
ON/OFF + EM	Ø62x36 mm	35.42.001.01.81	35.42.001.01.89	35.42.001.01.97
DALI	Ø62x36 mm	35.42.001.01.82	35.42.001.01.90	35.42.001.01.98
DALI + EM	Ø103x36 mm	35.42.001.01.83	35.42.001.01.91	35.42.001.01.99



RECESSED CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø80 mm	35.42.001.01.84	35.42.001.01.92	35.42.002.01.00
ON/OFF + EM	Ø80 mm	35.42.001.01.85	35.42.001.01.93	35.42.002.01.01
DALI	Ø80 mm	35.42.001.01.86	35.42.001.01.94	35.42.002.01.02
DALI + EM	Ø80 mm	35.42.001.01.87	35.42.001.01.95	35.42.002.01.03



SUSPENSION SYSTEM (2pcs)

TYPE	1m	3m	5m
Matt White + Stainless Steel Cable	35.42.000.01.54	35.42.000.01.62	35.42.001.01.26

OPTIONS



EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF	COD
EM 1H 3W	35.00.003.01.23*
EM 3H 3W	35.00.003.01.24**
DALI	COD
EM 1H 5,4W DALI	35.00.004.01.54*
EM 3H 5,4W DALI	35.00.004.01.55**

* Applies to lengths equal to or greater than 1131 mm. ** Applies to lengths equal to or greater than 1412 mm.
 > On request – External Emergency. Box dimensions: 45x120x360 mm.

WELINE DIRECT & INDIRECT LIGHT SUSPENDED




OPAL or
MICRO PRISMATIC

EN

- > Modular lighting system with 70% direct and 30% indirect light distribution.
- > Suspended luminaire with stainless steel suspension with adjustment of height and position along the luminaire length.
- > Can be used as single luminaire or continuous-row system.
- > Micro prismatic Polycarbonate diffuser for glare control (UGR <19) or Opal Polycarbonate diffuser.
- > LED optimised Opal PMMA indirect lighting diffuser.
- > Extruded aluminium profile body.
- > Die-cast end caps without screws.

FR

- > Système modulaire d'éclairage à émission directe (70%) et indirecte (30%) du flux.
- > Application suspendue par câbles en acier inoxydable avec réglage de la hauteur et de la position le long du luminaire.
- > Peut être utilisé comme luminaire individuel ou système en ligne continue.
- > Diffuseur éclairage direct en Polycarbonate Microprismatique pour contrôle de l'éblouissement (UGR <19) ou diffuseur Polycarbonate Opale.
- > Diffuseur éclairage indirect en PMMA Opale optimisé pour les LED.
- > Corps en profil d'aluminium extrudé.
- > Embouts injectées et sans vis.

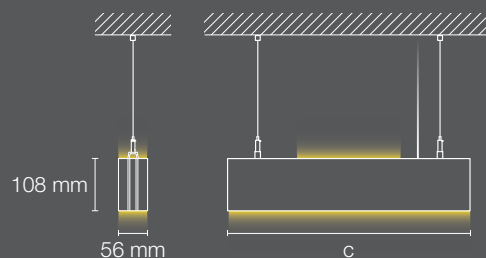

QUICK INFO

GENERAL

Suspended
IP40
IK05
750°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 188 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=75°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI
Direct / Indirect - Simultaneous Control

FINISHING

RAL 9003 Matt White
Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut
Direct / Indirect - Separate Control

CONTROL SYSTEM

Bluetooth

FINISHING


 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

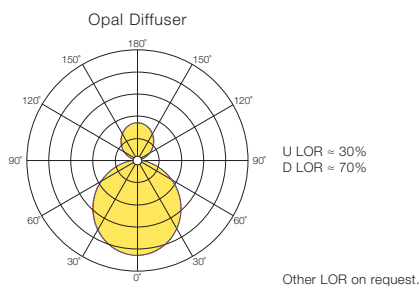

WELINE SUSPENDED - DIRECT & INDIRECT LIGHT OPAL DIFFUSER

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1126	3368	30	33.42.55.02.000	33.42.55.02.016
	6354	63	33.42.55.02.004	33.42.55.02.020
1407	4394	39	33.42.55.02.001	33.42.55.02.017
	8291	82	33.42.55.02.005	33.42.55.02.021
2250	6735	60	33.42.55.02.002	33.42.55.02.018
	12709	126	33.42.55.02.006	33.42.55.02.022
2812	8420	75	33.42.55.02.003	33.42.55.02.019
	15887	157	33.42.55.02.007	33.42.55.02.023
4000 K				
1126	3523	30	33.42.55.02.032	33.42.55.02.048
	6649	63	33.42.55.02.036	33.42.55.02.052
1407	4597	39	33.42.55.02.033	33.42.55.02.049
	8676	82	33.42.55.02.037	33.42.55.02.053
2250	7047	60	33.42.55.02.034	33.42.55.02.050
	13297	126	33.42.55.02.038	33.42.55.02.054
2812	8808	75	33.42.55.02.035	33.42.55.02.051
	16624	157	33.42.55.02.039	33.42.55.02.055

MATT ANODIZED FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1126	3368	30	33.42.55.02.008	33.42.55.02.024
	6354	63	33.42.55.02.012	33.42.55.02.028
1407	4394	39	33.42.55.02.009	33.42.55.02.025
	8291	82	33.42.55.02.013	33.42.55.02.029
2250	6735	60	33.42.55.02.010	33.42.55.02.026
	12709	126	33.42.55.02.014	33.42.55.02.030
2812	8420	75	33.42.55.02.011	33.42.55.02.027
	15887	157	33.42.55.02.015	33.42.55.02.031
4000 K				
1126	3523	30	33.42.55.02.040	33.42.55.02.056
	6649	63	33.42.55.02.044	33.42.55.02.060
1407	4597	39	33.42.55.02.041	33.42.55.02.057
	8676	82	33.42.55.02.045	33.42.55.02.061
2250	7047	60	33.42.55.02.042	33.42.55.02.058
	13297	126	33.42.55.02.046	33.42.55.02.062
2812	8808	75	33.42.55.02.043	33.42.55.02.059
	16624	157	33.42.55.02.047	33.42.55.02.063

QUICK INFO

GENERAL

Suspended
IP40
IK05
750°C
Class I
Ta= -20°C +35°C

OPTIC

Micro Prismatic PC - UGR <19

LED

Efficacy up to 188 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=75°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI
Direct / Indirect - Simultaneous Control

FINISHING

RAL 9003 Matt White
Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut
Direct / Indirect - Separate Control

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours


EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

Micro Prismatic Diffuser - UGR<19

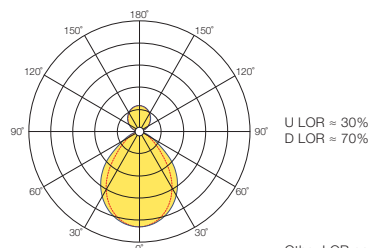

WELINE SUSPENDED - DIRECT & INDIRECT LIGHT

MICRO PRISMATIC DIFFUSER - UGR <19

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1126	2468	30	33.42.55.02.064	33.42.55.02.080
	4655	63	33.42.55.02.068	33.42.55.02.084
1407	3269	39	33.42.55.02.065	33.42.55.02.081
	6168	82	33.42.55.02.069	33.42.55.02.085
2250	4934	60	33.42.55.02.066	33.42.55.02.082
	9310	126	33.42.55.02.070	33.42.55.02.086
2812	6168	75	33.42.55.02.067	33.42.55.02.083
	11638	157	33.42.55.02.071	33.42.55.02.087
4000 K				
1126	2581	30	33.42.55.02.096	33.42.55.02.112
	4871	63	33.42.55.02.100	33.42.55.02.116
1407	3420	39	33.42.55.02.097	33.42.55.02.113
	6454	82	33.42.55.02.101	33.42.55.02.117
2250	5163	60	33.42.55.02.098	33.42.55.02.114
	9742	126	33.42.55.02.102	33.42.55.02.118
2812	6453	75	33.42.55.02.099	33.42.55.02.115
	12178	157	33.42.55.02.103	33.42.55.02.119

MATT ANODIZED FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1126	2468	30	33.42.55.02.072	33.42.55.02.088
	4655	63	33.42.55.02.076	33.42.55.02.092
1407	3269	39	33.42.55.02.073	33.42.55.02.089
	6168	82	33.42.55.02.077	33.42.55.02.093
2250	4934	60	33.42.55.02.074	33.42.55.02.090
	9310	126	33.42.55.02.078	33.42.55.02.094
2812	6168	75	33.42.55.02.075	33.42.55.02.091
	11638	157	33.42.55.02.079	33.42.55.02.095
4000 K				
1126	2581	30	33.42.55.02.104	33.42.55.02.120
	4871	63	33.42.55.02.108	33.42.55.02.124
1407	3420	39	33.42.55.02.105	33.42.55.02.121
	6454	82	33.42.55.02.109	33.42.55.02.125
2250	5163	60	33.42.55.02.106	33.42.55.02.122
	9742	126	33.42.55.02.110	33.42.55.02.126
2812	6453	75	33.42.55.02.107	33.42.55.02.123
	12178	157	33.42.55.02.111	33.42.55.02.127

WELINE

DIRECT & INDIRECT LIGHT

SUSPENDED

COMPONENTS



END CAP (1pc)

	COD
Matt White	35.42.55.02.000
Matt Anodized Similar Painting	35.42.55.02.001



SURFACE CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø62x36 mm	35.42.001.01.80	35.42.001.01.88	35.42.001.01.96
ON/OFF + EM	Ø62x36 mm	35.42.001.01.81	35.42.001.01.89	35.42.001.01.97
DALI	Ø62x36 mm	35.42.001.01.82	35.42.001.01.90	35.42.001.01.98
DALI + EM	Ø103x36 mm	35.42.001.01.83	35.42.001.01.91	35.42.001.01.99



RECESSED CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø80 mm	35.42.001.01.84	35.42.001.01.92	35.42.002.01.00
ON/OFF + EM	Ø80 mm	35.42.001.01.85	35.42.001.01.93	35.42.002.01.01
DALI	Ø80 mm	35.42.001.01.86	35.42.001.01.94	35.42.002.01.02
DALI + EM	Ø80 mm	35.42.001.01.87	35.42.001.01.95	35.42.002.01.03



SUSPENSION SYSTEM (2pcs)

TYPE	1m	3m	5m
Matt White + Stainless Steel Cable	35.42.014.08.27	35.42.025.08.89	35.42.027.08.46



LINEAR COUPLER (1pc)

	COD
Coupler	35.42.55.00.005

OPTIONS




EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF	COD
EM 1H 3W	35.00.003.01.23*
EM 3H 3W	35.00.003.01.24*
DALI	COD
EM 1H 5,4W DALI	35.00.003.01.54*
EM 3H 5,4W DALI	35.00.004.01.55*

* Applies to lengths equal to or greater than 1407 mm.

> On request – External Emergency. Box dimensions: 45x120x360 mm.

WELINE SURFACE

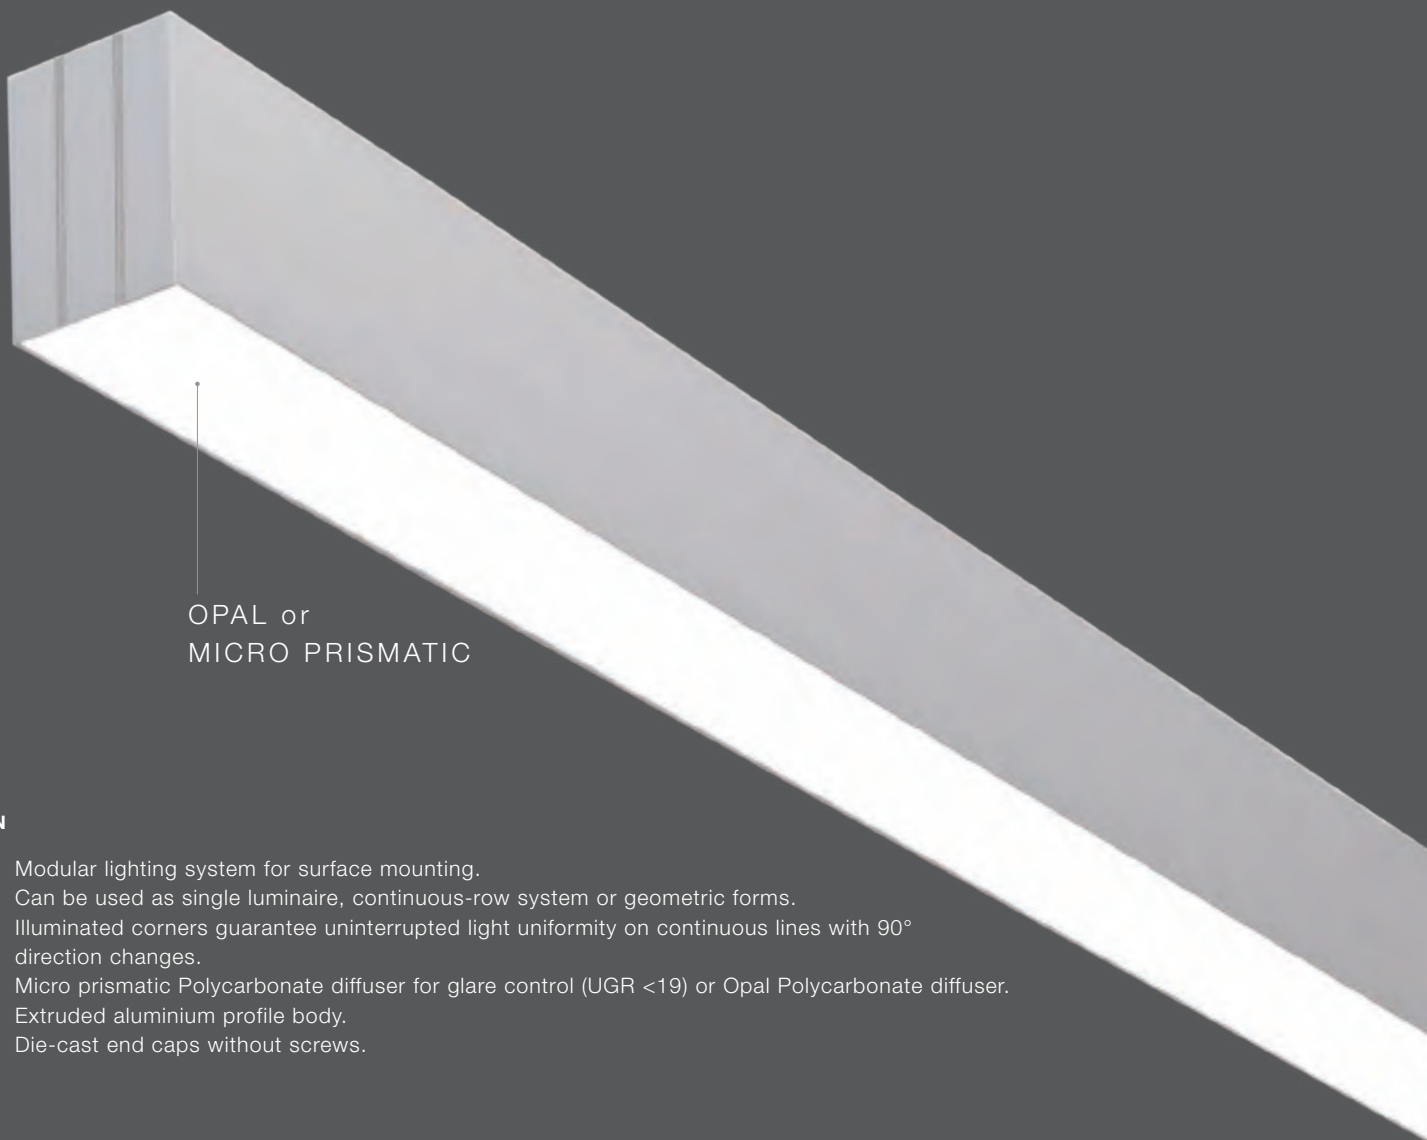

OPAL or
MICRO PRISMATIC

EN

- > Modular lighting system for surface mounting.
- > Can be used as single luminaire, continuous-row system or geometric forms.
- > Illuminated corners guarantee uninterrupted light uniformity on continuous lines with 90° direction changes.
- > Micro prismatic Polycarbonate diffuser for glare control (UGR <19) or Opal Polycarbonate diffuser.
- > Extruded aluminium profile body.
- > Die-cast end caps without screws.

FR

- > Système modulaire d'éclairage pour une application apparente.
- > Peut être utilisé comme luminaire individuel, système en ligne continue ou formes géométriques.
- > Les angles éclairés assurent une lumière uniforme sans interruption dans les lignes continues avec des changements de direction à 90°.
- > Diffuseur en Polycarbonate Microprismatique pour contrôle de l'éblouissement (UGR <19) ou diffuseur Polycarbonate Opale.
- > Corps en profil d'aluminium extrudé.
- > Embouts injectées et sans vis.

QUICK INFO
GENERAL

Surface
 IP40
 IK05
 850°C
 Class I
 Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 172 lm/W
 3000 K, 4000 K
 CRI >80
 Lifetime 72 000 H
 L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
 ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS
LED

2700 K, 5000 K, 6500 K
 Tunable White, RGB, RGBW
 CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

Other Colours

EMERGENCY

1 Hour, 3 Hours
 DALI 1 Hour, 3 Hours



SENSORS

Motion
 Ambient Light
 Motion & Ambient Light

WELINE SURFACE
OPAL DIFFUSER
MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
564	1241	13	33.42.55.10.012	33.42.55.10.072
	2480	25	33.42.55.10.018	33.42.55.10.078
845	1860	19	33.42.55.10.013	33.42.55.10.073
	3720	38	33.42.55.10.019	33.42.55.10.079
1126	2480	25	33.42.55.10.014	33.42.55.10.074
	4961	50	33.42.55.10.020	33.42.55.10.080
1407	3100	31	33.42.55.10.015	33.42.55.10.075
	6201	63	33.42.55.10.021	33.42.55.10.081
2250	4959	50	33.42.55.10.016	33.42.55.10.076
	9921	101	33.42.55.10.022	33.42.55.10.082
2812	6200	63	33.42.55.10.017	33.42.55.10.077
	12401	126	33.42.55.10.023	33.42.55.10.083
Corner 600x600	2480	25	33.42.55.10.502	33.42.55.10.512
	4961	50	33.42.55.10.503	33.42.55.10.513
4000 K				
564	1298	13	33.42.55.10.132	33.42.55.10.192
	2595	25	33.42.55.10.138	33.42.55.10.198
845	1947	19	33.42.55.10.133	33.42.55.10.193
	3893	38	33.42.55.10.139	33.42.55.10.199
1126	2595	25	33.42.55.10.134	33.42.55.10.194
	5190	50	33.42.55.10.140	33.42.55.10.200
1407	3244	31	33.42.55.10.135	33.42.55.10.195
	6488	63	33.42.55.10.141	33.42.55.10.201
2250	5190	50	33.42.55.10.136	33.42.55.10.196
	10381	101	33.42.55.10.142	33.42.55.10.202
2812	6489	63	33.42.55.10.137	33.42.55.10.197
	12976	126	33.42.55.10.143	33.42.55.10.203
Corner 600x600	2595	25	33.42.55.10.522	33.42.55.10.532
	5190	50	33.42.55.10.523	33.42.55.10.533

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.

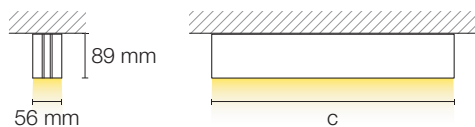

QUICK INFO

GENERAL

Surface
IP40
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 172 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light


WELINE SURFACE

OPAL DIFFUSER

MATT ANODIZED FINISHING


c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
564	1241	13	33.42.55.10.000	33.42.55.10.060
	2480	25	33.42.55.10.006	33.42.55.10.066
845	1860	19	33.42.55.10.001	33.42.55.10.061
	3720	38	33.42.55.10.007	33.42.55.10.067
1126	2480	25	33.42.55.10.002	33.42.55.10.062
	4961	50	33.42.55.10.008	33.42.55.10.068
1407	3100	31	33.42.55.10.003	33.42.55.10.063
	6201	63	33.42.55.10.009	33.42.55.10.069
2250	4959	50	33.42.55.10.004	33.42.55.10.064
	9921	101	33.42.55.10.010	33.42.55.10.070
2812	6200	63	33.42.55.10.005	33.42.55.10.065
	12401	126	33.42.55.10.011	33.42.55.10.071
Corner 600x600	2480	25	33.42.55.10.500	33.42.55.10.510
	4961	50	33.42.55.10.501	33.42.55.10.511
4000 K				
564	1298	13	33.42.55.10.120	33.42.55.10.180
	2595	25	33.42.55.10.126	33.42.55.10.186
845	1947	19	33.42.55.10.121	33.42.55.10.181
	3893	38	33.42.55.10.127	33.42.55.10.187
1126	2595	25	33.42.55.10.122	33.42.55.10.182
	5190	50	33.42.55.10.128	33.42.55.10.188
1407	3244	31	33.42.55.10.123	33.42.55.10.183
	6488	63	33.42.55.10.129	33.42.55.10.189
2250	5190	50	33.42.55.10.124	33.42.55.10.184
	10381	101	33.42.55.10.130	33.42.55.10.190
2812	6489	63	33.42.55.10.125	33.42.55.10.185
	12976	126	33.42.55.10.131	33.42.55.10.191
Corner 600x600	2595	25	33.42.55.10.520	33.42.55.10.530
	5190	50	33.42.55.10.521	33.42.55.10.531

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.



DESCRIPTION

- 1 > DRIVER
- 2 > LED BOARD
- 3 > LED COVER
- 4 > REFLECTOR
- 5 > DIFFUSER

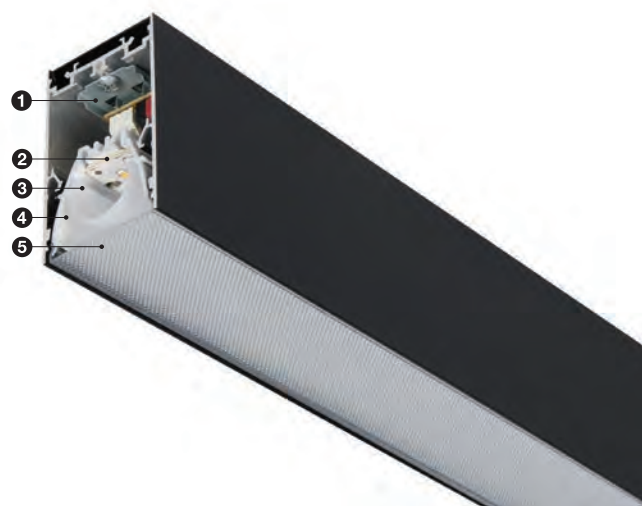

QUICK INFO
GENERAL

Surface
 IP40
 IK05
 850°C
 Class I
 Ta= -20°C +35°C

OPTIC

Micro Prismatic Polycarbonate
 UGR <19

LED

Efficacy up to 182 lm/W
 3000 K, 4000 K
 CRI >80
 Lifetime 72 000 H
 L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
 ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS
LED

2700 K, 5000 K, 6500 K
 Tunable White, RGB, RGBW
 CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
 DALI 1 Hour, 3 Hours


SENSORS

Motion
 Ambient Light
 Motion & Ambient Light

WELINE SURFACE
MICRO PRISMATIC DIFFUSER - UGR <19
MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
564	506	7	33.42.55.10.054	33.42.55.10.114
	816	13	33.42.55.10.042	33.42.55.10.102
	1630	25	33.42.55.10.048	33.42.55.10.108
845	759	11	33.42.55.10.055	33.42.55.10.115
	1223	19	33.42.55.10.043	33.42.55.10.103
	2446	38	33.42.55.10.049	33.42.55.10.109
1126	1012	15	33.42.55.10.056	33.42.55.10.116
	1630	25	33.42.55.10.044	33.42.55.10.104
	3262	50	33.42.55.10.050	33.42.55.10.110
1407	1265	18	33.42.55.10.057	33.42.55.10.117
	2038	31	33.42.55.10.045	33.42.55.10.105
	4077	63	33.42.55.10.051	33.42.55.10.111
2250	2023	29	33.42.55.10.058	33.42.55.10.118
	3261	50	33.42.55.10.046	33.42.55.10.106
	6523	101	33.42.55.10.052	33.42.55.10.112
2812	2529	37	33.42.55.10.059	33.42.55.10.119
	4076	63	33.42.55.10.047	33.42.55.10.107
	8154	126	33.42.55.10.053	33.42.55.10.113
Corner 600x600	1012	15	33.42.55.10.507	33.42.55.10.517
	1630	25	33.42.55.10.508	33.42.55.10.518
	3262	50	33.42.55.10.509	33.42.55.10.519
4000 K				
564	529	7	33.42.55.10.174	33.42.55.10.234
	854	13	33.42.55.10.162	33.42.55.10.222
	1706	25	33.42.55.10.168	33.42.55.10.228
845	794	11	33.42.55.10.175	33.42.55.10.235
	1280	19	33.42.55.10.163	33.42.55.10.223
	2559	38	33.42.55.10.169	33.42.55.10.229
1126	1058	15	33.42.55.10.176	33.42.55.10.236
	1706	25	33.42.55.10.164	33.42.55.10.224
	3413	50	33.42.55.10.170	33.42.55.10.230
1407	1323	18	33.42.55.10.177	33.42.55.10.237
	2133	31	33.42.55.10.165	33.42.55.10.225
	4266	63	33.42.55.10.171	33.42.55.10.231
2250	2117	29	33.42.55.10.178	33.42.55.10.238
	3413	50	33.42.55.10.166	33.42.55.10.226
	6825	101	33.42.55.10.172	33.42.55.10.232
2812	2646	37	33.42.55.10.179	33.42.55.10.239
	4266	63	33.42.55.10.167	33.42.55.10.227
	8532	126	33.42.55.10.173	33.42.55.10.233
Corner 600x600	1058	15	33.42.55.10.527	33.42.55.10.537
	1706	25	33.42.55.10.528	33.42.55.10.538
	3413	50	33.42.55.10.529	33.42.55.10.539

Micro Prismatic Diffuser - UGR<19



QUICK INFO

GENERAL

Surface
IP40
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Micro Prismatic Polycarbonate
UGR <19

LED

Efficacy up to 182 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light


WELINE SURFACE

MICRO PRISMATIC DIFFUSER - UGR <19

MATT ANODIZED FINISHING


c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
564	506	7	33.42.55.10.036	33.42.55.10.096
	816	13	33.42.55.10.024	33.42.55.10.084
	1630	25	33.42.55.10.030	33.42.55.10.090
845	759	11	33.42.55.10.037	33.42.55.10.097
	1223	19	33.42.55.10.025	33.42.55.10.085
	2446	38	33.42.55.10.031	33.42.55.10.091
1126	1012	15	33.42.55.10.038	33.42.55.10.098
	1630	25	33.42.55.10.026	33.42.55.10.086
	3262	50	33.42.55.10.032	33.42.55.10.092
1407	1265	18	33.42.55.10.039	33.42.55.10.099
	2038	31	33.42.55.10.027	33.42.55.10.087
	4077	63	33.42.55.10.033	33.42.55.10.093
2250	2023	29	33.42.55.10.040	33.42.55.10.100
	3261	50	33.42.55.10.028	33.42.55.10.088
	6523	101	33.42.55.10.034	33.42.55.10.094
2812	2529	37	33.42.55.10.041	33.42.55.10.101
	4076	63	33.42.55.10.029	33.42.55.10.089
	8154	126	33.42.55.10.035	33.42.55.10.095
Corner 600x600	1012	15	33.42.55.10.504	33.42.55.10.514
	1630	25	33.42.55.10.505	33.42.55.10.515
	3262	50	33.42.55.10.506	33.42.55.10.516
4000 K				
564	529	7	33.42.55.10.156	33.42.55.10.216
	854	13	33.42.55.10.144	33.42.55.10.204
	1706	25	33.42.55.10.150	33.42.55.10.210
845	794	11	33.42.55.10.157	33.42.55.10.217
	1280	19	33.42.55.10.145	33.42.55.10.205
	2559	38	33.42.55.10.151	33.42.55.10.211
1126	1058	15	33.42.55.10.158	33.42.55.10.218
	1706	25	33.42.55.10.146	33.42.55.10.206
	3413	50	33.42.55.10.152	33.42.55.10.212
1407	1323	18	33.42.55.10.159	33.42.55.10.219
	2133	31	33.42.55.10.147	33.42.55.10.207
	4266	63	33.42.55.10.153	33.42.55.10.213
2250	2117	29	33.42.55.10.160	33.42.55.10.220
	3413	50	33.42.55.10.148	33.42.55.10.208
	6825	101	33.42.55.10.154	33.42.55.10.214
2812	2646	37	33.42.55.10.161	33.42.55.10.221
	4266	63	33.42.55.10.149	33.42.55.10.209
	8532	126	33.42.55.10.155	33.42.55.10.215
Corner 600x600	1058	15	33.42.55.10.524	33.42.55.10.534
	1706	25	33.42.55.10.525	33.42.55.10.535
	3413	50	33.42.55.10.526	33.42.55.10.536

Micro Prismatic Diffuser - UGR<19



WELINE

SURFACE

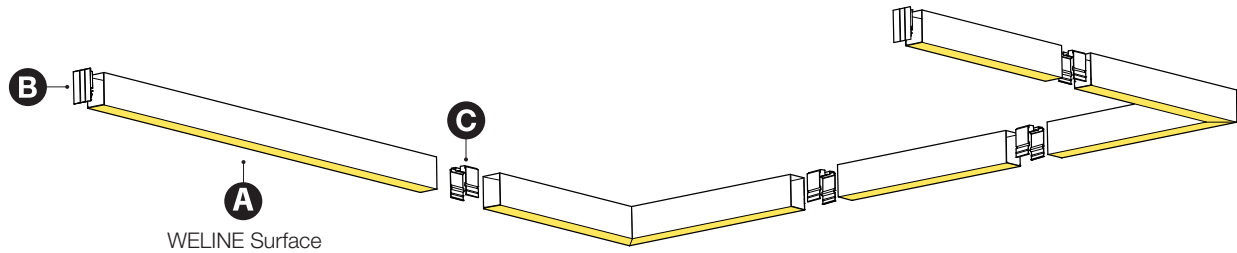

COMPONENTS



B END CAP (1pc)

COD

Matt White	35.42.55.00.000
Matt Anodized Similar Painting	35.42.55.00.001



C LINEAR COUPLER (1pc)

COD

Coupler	35.42.55.00.005
---------	-----------------

OPTIONS



EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF

COD

EM 1H 3W	35.00.003.01.23*
EM 3H 3W	35.00.003.01.24**


DALI

COD

EM 1H 5,4W DALI	35.00.004.01.54*
EM 3H 5,4W DALI	35.00.004.01.55**

* Applies to lengths equal to or greater than 1126 mm. ** Applies to lengths equal to or greater than 1407 mm.
> On request – External Emergency. Box dimensions: 45x120x360 mm.

WELINE IP54 SURFACE

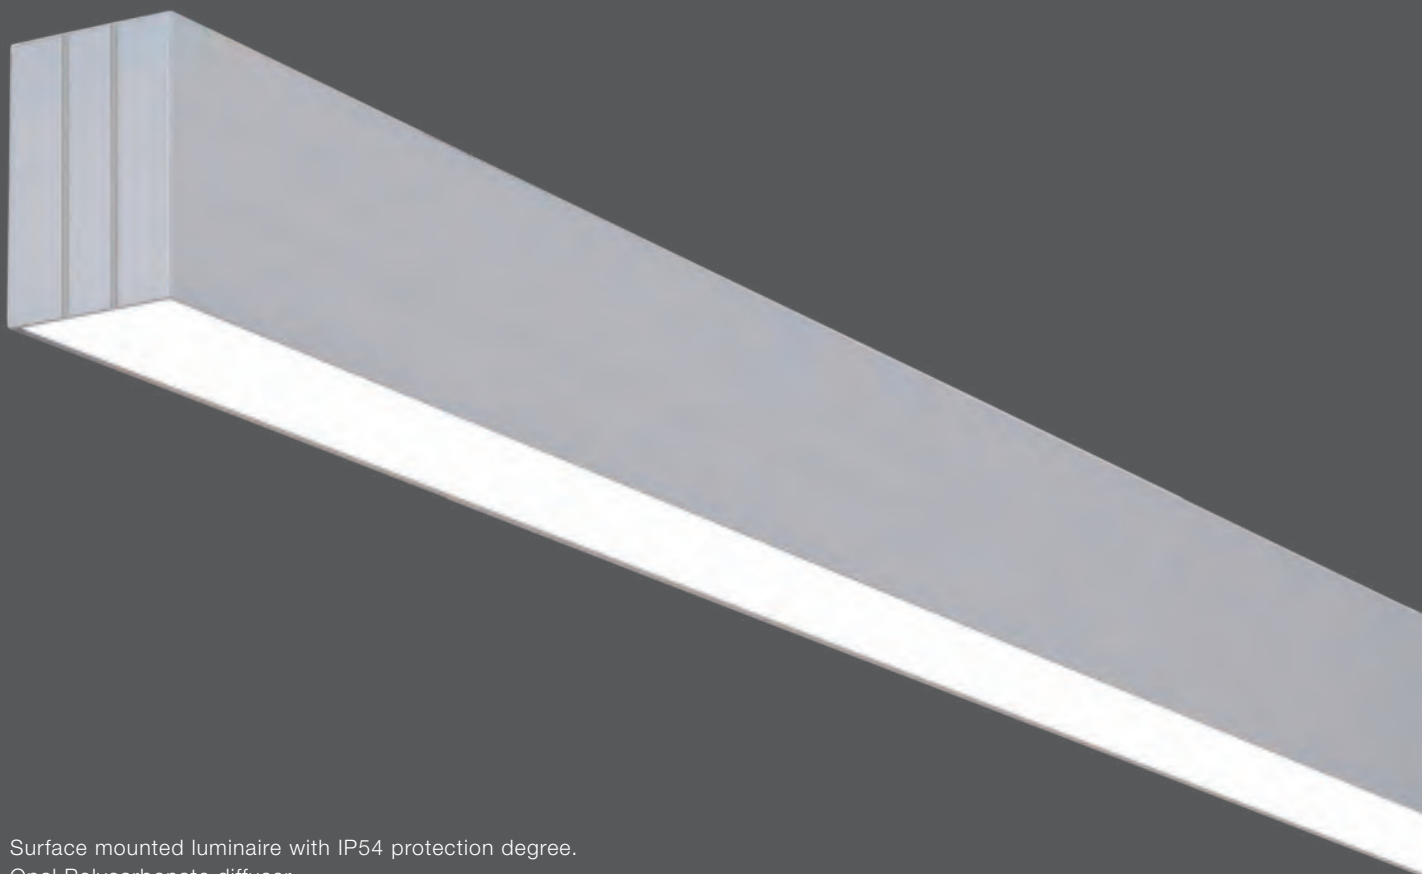


EN

- > Surface mounted luminaire with IP54 protection degree.
- > Opal Polycarbonate diffuser.
- > Extruded aluminium profile body.
- > Supplied with die-cast end caps without screws.

FR

- > Luminaire d'application apparente à degré de protection IP54.
- > Diffuseur en Polycarbonate Opale.
- > Corps en profil d'aluminium extrudé.
- > Fourni avec embouts injectées et sans vis.



QUICK INFO

GENERAL

Surface
IP54
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 172 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING


 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light



WELINE IP54 SURFACE


OPAL DIFFUSER

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
570	979	13	33.42.55.11.012	33.42.55.11.060
	1957	25	33.42.55.11.018	33.42.55.11.066
850	1468	19	33.42.55.11.013	33.42.55.11.061
	2936	38	33.42.55.11.019	33.42.55.11.067
1131	1957	25	33.42.55.11.014	33.42.55.11.062
	3915	50	33.42.55.11.020	33.42.55.11.068
1412	2446	31	33.42.55.11.015	33.42.55.11.063
	4893	63	33.42.55.11.021	33.42.55.11.069
2252	3914	50	33.42.55.11.016	33.42.55.11.064
	7830	101	33.42.55.11.022	33.42.55.11.070
2817	4893	63	33.42.55.11.017	33.42.55.11.065
	9787	126	33.42.55.11.023	33.42.55.11.071
4000 K				
570	1025	13	33.42.55.11.108	33.42.55.11.156
	2048	25	33.42.55.11.114	33.42.55.11.162
850	1536	19	33.42.55.11.109	33.42.55.11.157
	3072	38	33.42.55.11.115	33.42.55.11.163
1131	2048	25	33.42.55.11.110	33.42.55.11.158
	4096	50	33.42.55.11.116	33.42.55.11.164
1412	2560	31	33.42.55.11.111	33.42.55.11.159
	5120	63	33.42.55.11.117	33.42.55.11.165
2252	4096	50	33.42.55.11.112	33.42.55.11.160
	8192	101	33.42.55.11.118	33.42.55.11.166
2817	5121	63	33.42.55.11.113	33.42.55.11.161
	10240	126	33.42.55.11.119	33.42.55.11.167

DESCRIPTION

- 1 > DRIVER
- 2 > REFLECTOR + LED BOARD
- 3 > DIFFUSER

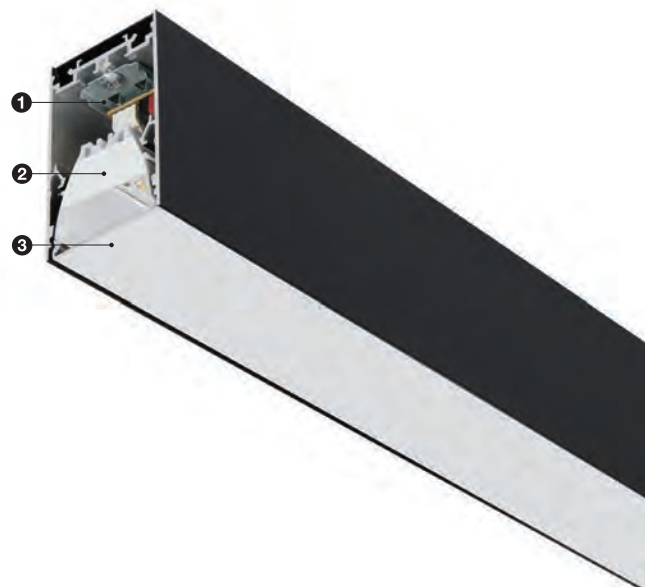

QUICK INFO

GENERAL

Surface
IP54
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 172 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

RAL 9005 Matt Black
 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

WELINE IP54 SURFACE

OPAL DIFFUSER

MATT ANODIZED FINISHING


c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
570	979	13	33.42.55.11.000	33.42.55.11.048
	1957	25	33.42.55.11.006	33.42.55.11.054
850	1468	19	33.42.55.11.001	33.42.55.11.049
	2936	38	33.42.55.11.007	33.42.55.11.055
1131	1957	25	33.42.55.11.002	33.42.55.11.050
	3915	50	33.42.55.11.008	33.42.55.11.056
1412	2446	31	33.42.55.11.003	33.42.55.11.051
	4893	63	33.42.55.11.009	33.42.55.11.057
2252	3914	50	33.42.55.11.004	33.42.55.11.052
	7830	101	33.42.55.11.010	33.42.55.11.058
2817	4893	63	33.42.55.11.005	33.42.55.11.053
	9787	126	33.42.55.11.011	33.42.55.11.059
4000 K				
570	1025	13	33.42.55.11.096	33.42.55.11.144
	2048	25	33.42.55.11.102	33.42.55.11.150
850	1536	19	33.42.55.11.097	33.42.55.11.145
	3072	38	33.42.55.11.103	33.42.55.11.151
1131	2048	25	33.42.55.11.098	33.42.55.11.146
	4096	50	33.42.55.11.104	33.42.55.11.152
1412	2560	31	33.42.55.11.099	33.42.55.11.147
	5120	63	33.42.55.11.105	33.42.55.11.153
2252	4096	50	33.42.55.11.100	33.42.55.11.148
	8192	101	33.42.55.11.106	33.42.55.11.154
2817	5121	63	33.42.55.11.101	33.42.55.11.149
	10240	126	33.42.55.11.107	33.42.55.11.155

OPTIONS

EMERGENCY (EM) - SELF-TEST INTEGRATED


ON/OFF	COD
EM 1H 3W	35.00.003.01.23*
EM 3H 3W	35.00.003.01.24**
DALI	COD
EM 1H 5,4W DALI	35.00.004.01.54*
EM 3H 5,4W DALI	35.00.004.01.55**

* Applies to lengths equal to or greater than 1131 mm. ** Applies to lengths equal to or greater than 1412 mm.
> On request - External Emergency. Box dimensions: 45x120x360 mm.





WELINE
RECESSED

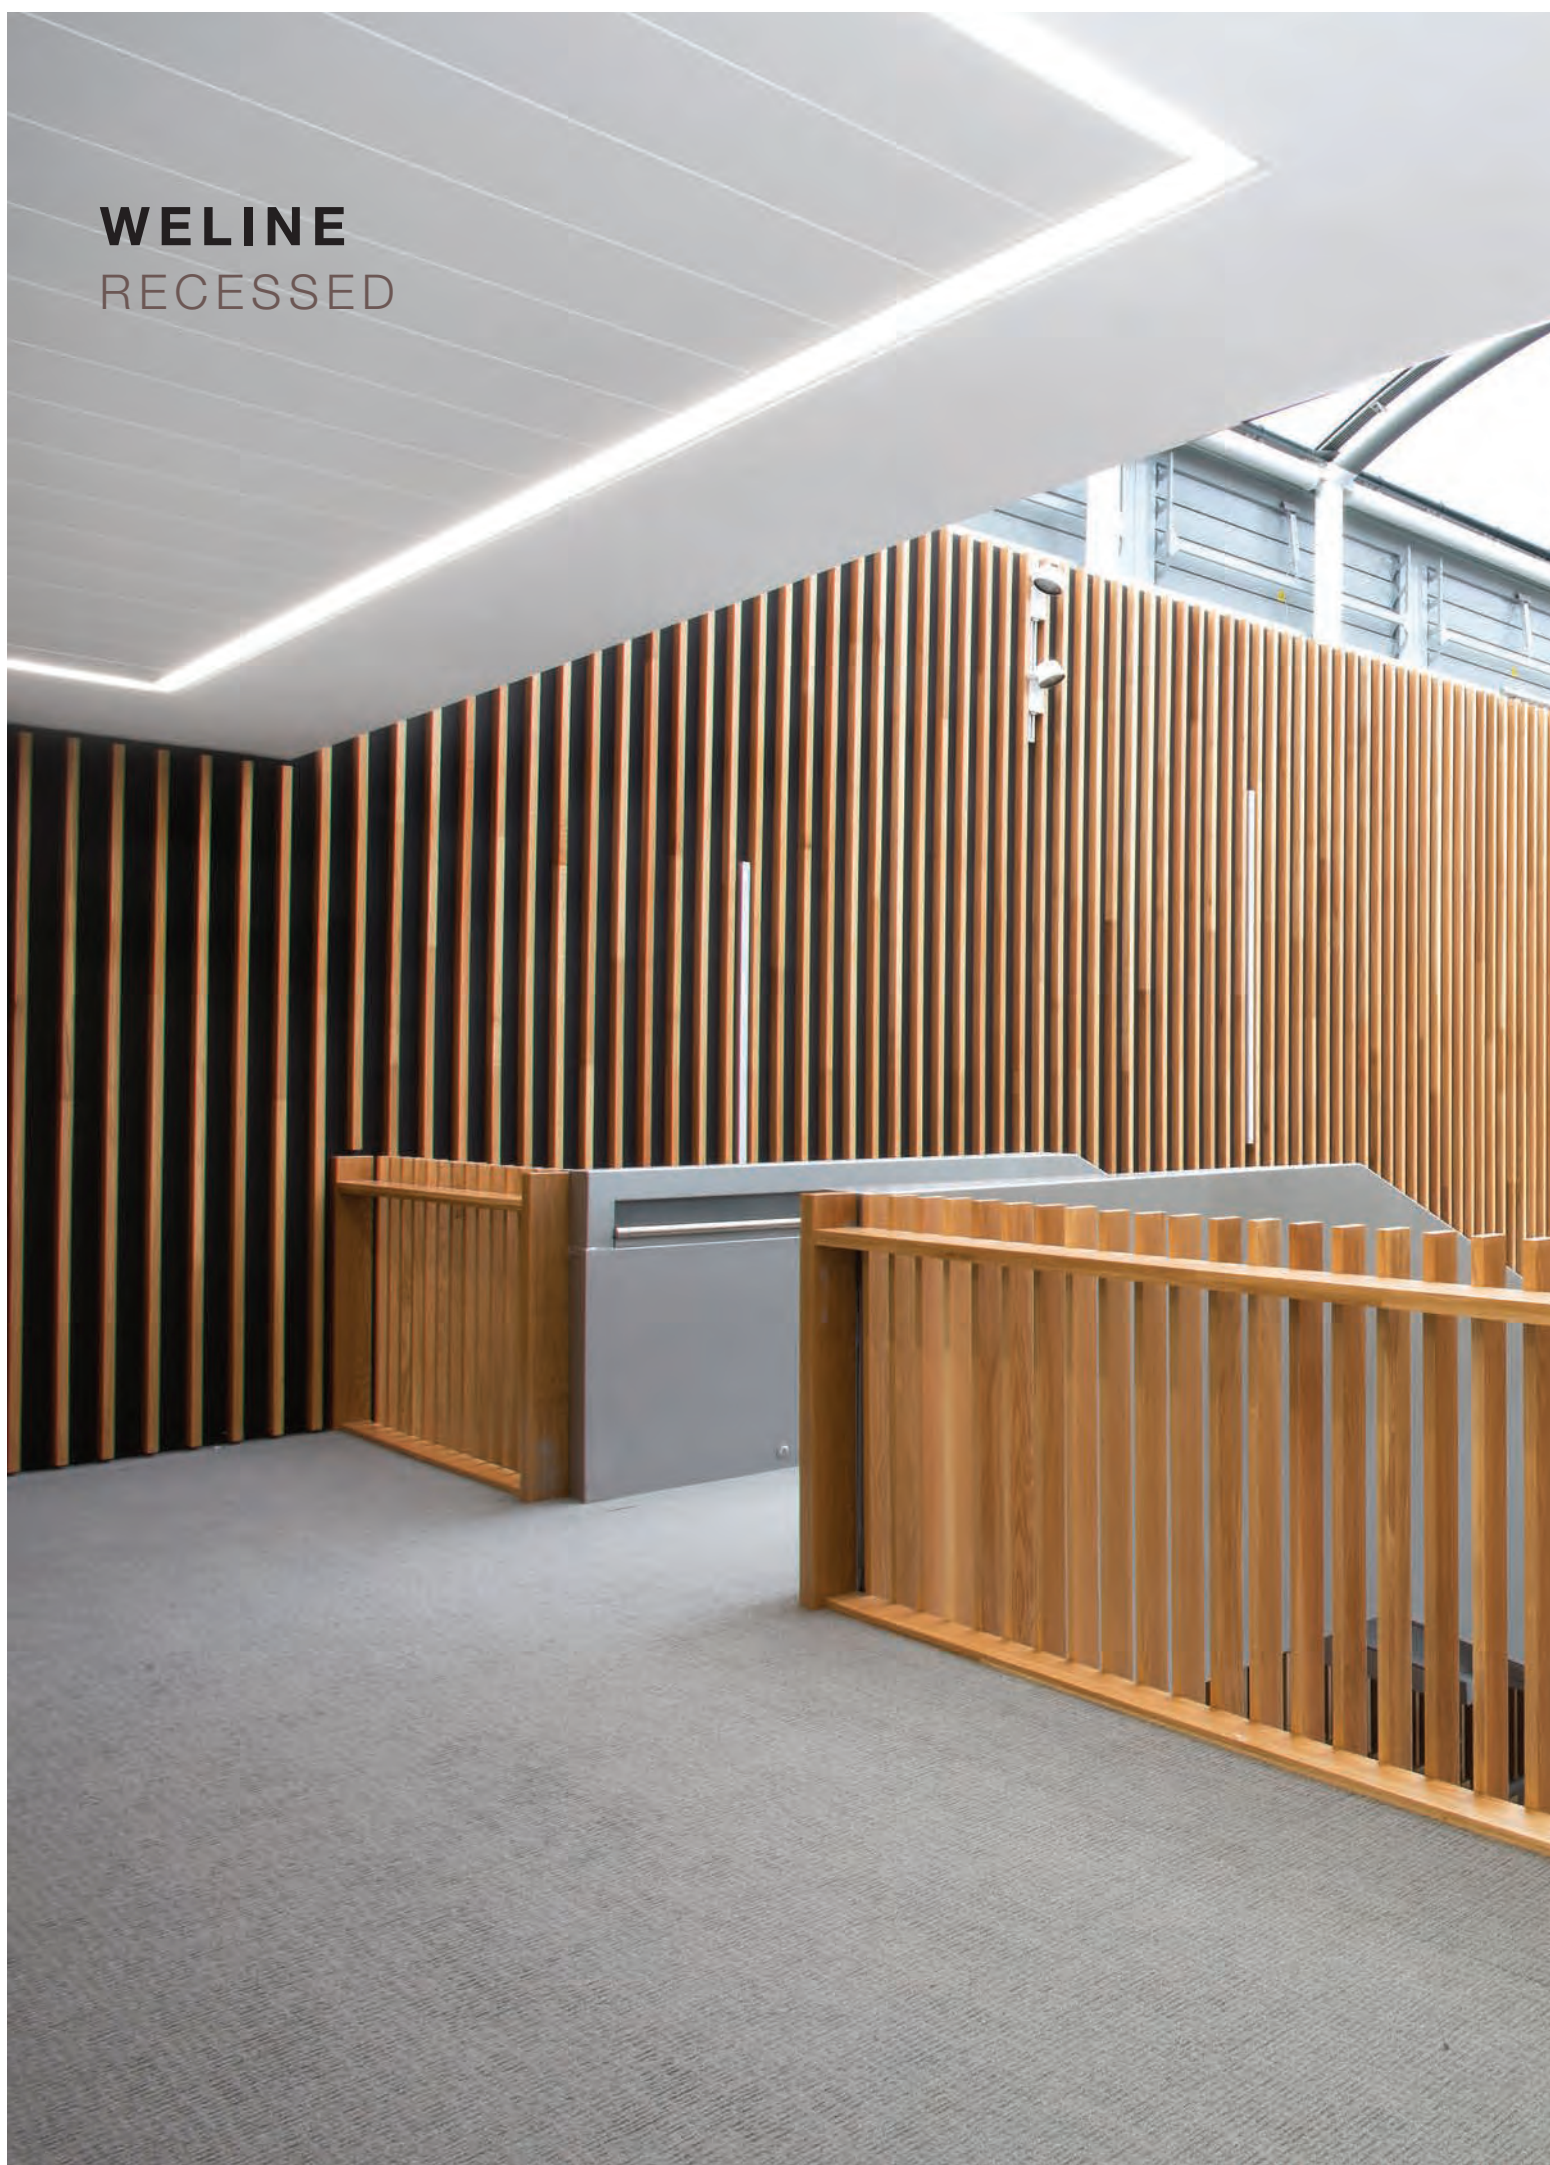



WELINE RECESSED



OPAL or
MICRO PRISMATIC

EN

- > Modular lighting system for recessed mounting.
- > Can be used as single luminaire, continuous-row system or geometric forms.
- > Illuminated corners guarantee uninterrupted light uniformity on continuous lines with 90° direction changes.
- > Micro prismatic Polycarbonate diffuser for glare control (UGR <19) or Opal Polycarbonate diffuser.
- > Extruded aluminium profile body.

FR

- > Système modulaire d'éclairage pour application encastrée.
- > Peut être utilisé comme luminaire individuel, système en ligne continue ou formes géométriques.
- > Les angles éclairés assurent une lumière uniforme sans interruption dans les lignes continues avec des changements de direction à 90°.
- > Diffuseur en Polycarbonate Microprismatique pour contrôle de l'éblouissement (UGR <19) ou diffuseur Polycarbonate Opale.
- > Corps en profil d'aluminium extrudé.

QUICK INFO
GENERAL

Recessed
 IP43 (Optic)
 IP20
 IK05
 850°C
 Class I
 Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 172 lm/W
 3000 K, 4000 K
 CRI >80
 Lifetime 72 000 H
 L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
 ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS
GENERAL (Individual Luminaire)

IP44 (Optic)
 Class II

LED

2700 K, 5000 K, 6500 K
 Tunable White, RGB, RGBW
 CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING


 Other Colours

EMERGENCY

1 Hour, 3 Hours
 DALI 1 Hour, 3 Hours

SENSORS

Motion
 Ambient Light
 Motion & Ambient Light

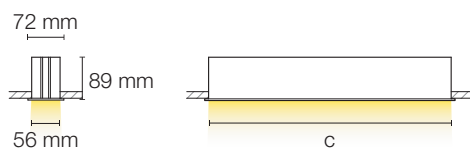

WELINE RECESSED
OPAL DIFFUSER
MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
564	1241	13	33.42.55.20.012	33.42.55.20.072
	2480	25	33.42.55.20.018	33.42.55.20.078
845	1860	19	33.42.55.20.013	33.42.55.20.073
	3720	38	33.42.55.20.019	33.42.55.20.079
1126	2480	25	33.42.55.20.014	33.42.55.20.074
	4961	50	33.42.55.20.020	33.42.55.20.080
1407	3100	31	33.42.55.20.015	33.42.55.20.075
	6201	63	33.42.55.20.021	33.42.55.20.081
2250	4959	50	33.42.55.20.016	33.42.55.20.076
	9921	101	33.42.55.20.022	33.42.55.20.082
2812	6200	63	33.42.55.20.017	33.42.55.20.077
	12401	126	33.42.55.20.023	33.42.55.20.083
Corner 610x610	2480	25	33.42.55.20.502	33.42.55.20.512
	4961	50	33.42.55.20.503	33.42.55.20.513
4000 K				
564	1298	13	33.42.55.20.132	33.42.55.20.192
	2595	25	33.42.55.20.138	33.42.55.20.198
845	1947	19	33.42.55.20.133	33.42.55.20.193
	3893	38	33.42.55.20.139	33.42.55.20.199
1126	2595	25	33.42.55.20.134	33.42.55.20.194
	5190	50	33.42.55.20.140	33.42.55.20.200
1407	3244	31	33.42.55.20.135	33.42.55.20.195
	6488	63	33.42.55.20.141	33.42.55.20.201
2250	5190	50	33.42.55.20.136	33.42.55.20.196
	10381	101	33.42.55.20.142	33.42.55.20.202
2812	6489	63	33.42.55.20.137	33.42.55.20.197
	12976	126	33.42.55.20.143	33.42.55.20.203
Corner 610x610	2595	25	33.42.55.20.522	33.42.55.20.532
	5190	50	33.42.55.20.523	33.42.55.20.533

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.

ON REQUEST (INDIVIDUAL LUMINAIRE)

- > IP44 (OPTIC);
- > CLASS II.



QUICK INFO

GENERAL

Recessed
IP43 (Optic)
IP20
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 172 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Matt Anodized

OPTIONS

GENERAL (Individual Luminaire)

IP44 (Optic)
Class II

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING


Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light



WELINE RECESSED

OPAL DIFFUSER

MATT ANODIZED FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
564	1241	13	33.42.55.20.000	33.42.55.20.060
	2480	25	33.42.55.20.006	33.42.55.20.066
845	1860	19	33.42.55.20.001	33.42.55.20.061
	3720	38	33.42.55.20.007	33.42.55.20.067
1126	2480	25	33.42.55.20.002	33.42.55.20.062
	4961	50	33.42.55.20.008	33.42.55.20.068
1407	3100	31	33.42.55.20.003	33.42.55.20.063
	6201	63	33.42.55.20.009	33.42.55.20.069
2250	4959	50	33.42.55.20.004	33.42.55.20.064
	9921	101	33.42.55.20.010	33.42.55.20.070
2812	6200	63	33.42.55.20.005	33.42.55.20.065
	12401	126	33.42.55.20.011	33.42.55.20.071
Corner 610x610	2480	25	33.42.55.20.500	33.42.55.20.510
	4961	50	33.42.55.20.501	33.42.55.20.511
4000 K				
564	1298	13	33.42.55.20.120	33.42.55.20.180
	2595	25	33.42.55.20.126	33.42.55.20.186
845	1947	19	33.42.55.20.121	33.42.55.20.181
	3893	38	33.42.55.20.127	33.42.55.20.187
1126	2595	25	33.42.55.20.122	33.42.55.20.182
	5190	50	33.42.55.20.128	33.42.55.20.188
1407	3244	31	33.42.55.20.123	33.42.55.20.183
	6488	63	33.42.55.20.129	33.42.55.20.189
2250	5190	50	33.42.55.20.124	33.42.55.20.184
	10381	101	33.42.55.20.130	33.42.55.20.190
2812	6489	63	33.42.55.20.125	33.42.55.20.185
	12976	126	33.42.55.20.131	33.42.55.20.191
Corner 610x610	2595	25	33.42.55.20.520	33.42.55.20.530
	5190	50	33.42.55.20.521	33.42.55.20.531

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.

DESCRIPTION

- 1 > DRIVER
- 2 > LED BOARD
- 3 > LED COVER
- 4 > REFLECTOR
- 5 > DIFFUSER



QUICK INFO

GENERAL

Recessed
IP43 (Optic)
IP20
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Micro Prismatic Polycarbonate
UGR <19

LED

Efficacy up to 182 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS

GENERAL (Individual Luminaire)

IP44 (Optic)
Class II

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours


EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

Micro Prismatic Diffuser - UGR<19



WELINE RECESSED

MICRO PRISMATIC DIFFUSER - UGR <19

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
564	506	7	33.42.55.20.054	33.42.55.20.114
	816	13	33.42.55.20.042	33.42.55.20.102
	1630	25	33.42.55.20.048	33.42.55.20.108
845	759	11	33.42.55.20.055	33.42.55.20.115
	1223	19	33.42.55.20.043	33.42.55.20.103
	2446	38	33.42.55.20.049	33.42.55.20.109
1126	1012	15	33.42.55.20.056	33.42.55.20.116
	1630	25	33.42.55.20.044	33.42.55.20.104
	3262	50	33.42.55.20.050	33.42.55.20.110
1407	1265	18	33.42.55.20.057	33.42.55.20.117
	2038	31	33.42.55.20.045	33.42.55.20.105
	4077	63	33.42.55.20.051	33.42.55.20.111
2250	2023	29	33.42.55.20.058	33.42.55.20.118
	3261	50	33.42.55.20.046	33.42.55.20.106
	6523	101	33.42.55.20.052	33.42.55.20.112
2812	2529	37	33.42.55.20.059	33.42.55.20.119
	4076	63	33.42.55.20.047	33.42.55.20.107
	8154	126	33.42.55.20.053	33.42.55.20.113
Corner 610x610	1012	15	33.42.55.20.507	33.42.55.20.517
	1630	25	33.42.55.20.508	33.42.55.20.518
	3262	50	33.42.55.20.509	33.42.55.20.519
4000 K				
564	529	7	33.42.55.20.174	33.42.55.20.234
	854	13	33.42.55.20.162	33.42.55.20.222
	1706	25	33.42.55.20.168	33.42.55.20.228
845	794	11	33.42.55.20.175	33.42.55.20.235
	1280	19	33.42.55.20.163	33.42.55.20.223
	2559	38	33.42.55.20.169	33.42.55.20.229
1126	1058	15	33.42.55.20.176	33.42.55.20.236
	1706	25	33.42.55.20.164	33.42.55.20.224
	3413	50	33.42.55.20.170	33.42.55.20.230
1407	1323	18	33.42.55.20.177	33.42.55.20.237
	2133	31	33.42.55.20.165	33.42.55.20.225
	4266	63	33.42.55.20.171	33.42.55.20.231
2250	2117	29	33.42.55.20.178	33.42.55.20.238
	3413	50	33.42.55.20.166	33.42.55.20.226
	6825	101	33.42.55.20.172	33.42.55.20.232
2812	2646	37	33.42.55.20.179	33.42.55.20.239
	4266	63	33.42.55.20.167	33.42.55.20.227
	8532	126	33.42.55.20.173	33.42.55.20.233
Corner 610x610	1058	15	33.42.55.20.527	33.42.55.20.537
	1706	25	33.42.55.20.528	33.42.55.20.538
	3413	50	33.42.55.20.529	33.42.55.20.539

QUICK INFO

GENERAL

Recessed
IP43 (Optic)
IP20
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Micro Prismatic Polycarbonate
UGR <19

LED

Efficacy up to 182 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Matt Anodized

OPTIONS

GENERAL (Individual Luminaire)

IP44 (Optic)
Class II

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours


EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

Micro Prismatic Diffuser - UGR<19



WELINE RECESSED


MICRO PRISMATIC DIFFUSER - UGR <19

MATT ANODIZED FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
564	506	7	33.42.55.20.036	33.42.55.20.096
	816	13	33.42.55.20.024	33.42.55.20.084
	1630	25	33.42.55.20.030	33.42.55.20.090
845	759	11	33.42.55.20.037	33.42.55.20.097
	1223	19	33.42.55.20.025	33.42.55.20.085
	2446	38	33.42.55.20.031	33.42.55.20.091
1126	1012	15	33.42.55.20.038	33.42.55.20.098
	1630	25	33.42.55.20.026	33.42.55.20.086
	3262	50	33.42.55.20.032	33.42.55.20.092
1407	1265	18	33.42.55.20.039	33.42.55.20.099
	2038	31	33.42.55.20.027	33.42.55.20.087
	4077	63	33.42.55.20.033	33.42.55.20.093
2250	2023	29	33.42.55.20.040	33.42.55.20.100
	3261	50	33.42.55.20.028	33.42.55.20.088
	6523	101	33.42.55.20.034	33.42.55.20.094
2812	2529	37	33.42.55.20.041	33.42.55.20.101
	4076	63	33.42.55.20.029	33.42.55.20.089
	8154	126	33.42.55.20.035	33.42.55.20.095
Corner 610x610	1012	15	33.42.55.20.504	33.42.55.20.514
	1630	25	33.42.55.20.505	33.42.55.20.515
	3262	50	33.42.55.20.506	33.42.55.20.516
4000 K				
564	529	7	33.42.55.20.156	33.42.55.20.216
	854	13	33.42.55.20.144	33.42.55.20.204
	1706	25	33.42.55.20.150	33.42.55.20.210
845	794	11	33.42.55.20.157	33.42.55.20.217
	1280	19	33.42.55.20.145	33.42.55.20.205
	2559	38	33.42.55.20.151	33.42.55.20.211
1126	1058	15	33.42.55.20.158	33.42.55.20.218
	1706	25	33.42.55.20.146	33.42.55.20.206
	3413	50	33.42.55.20.152	33.42.55.20.212
1407	1323	18	33.42.55.20.159	33.42.55.20.219
	2133	31	33.42.55.20.147	33.42.55.20.207
	4266	63	33.42.55.20.153	33.42.55.20.213
2250	2117	29	33.42.55.20.160	33.42.55.20.220
	3413	50	33.42.55.20.148	33.42.55.20.208
	6825	101	33.42.55.20.154	33.42.55.20.214
2812	2646	37	33.42.55.20.161	33.42.55.20.221
	4266	63	33.42.55.20.149	33.42.55.20.209
	8532	126	33.42.55.20.155	33.42.55.20.215
Corner 610x610	1058	15	33.42.55.20.524	33.42.55.20.534
	1706	25	33.42.55.20.525	33.42.55.20.535
	3413	50	33.42.55.20.526	33.42.55.20.536

WELINE

RECESSED

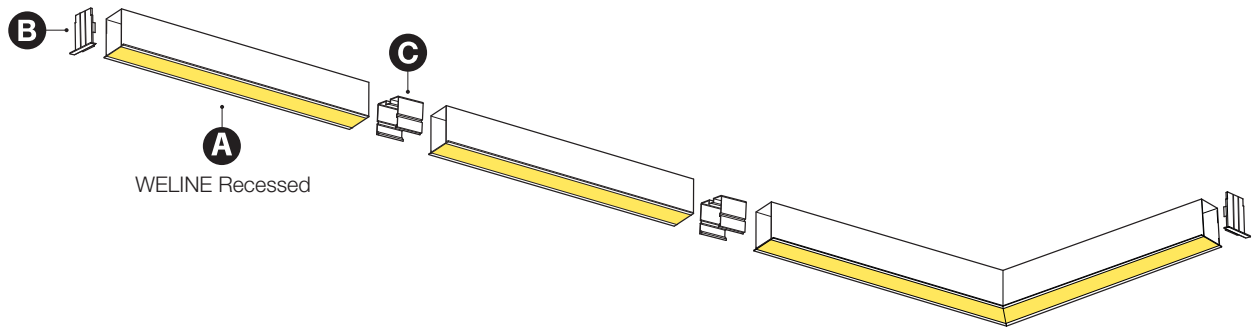

COMPONENTS



B END CAP (1pc)

COD

Matt White	35.42.55.20.000
Matt Anodized Similar Painting	35.42.55.20.001



C LINEAR COUPLER (1pc)

COD

Coupler	35.42.55.00.005
---------	-----------------

OPTIONS



EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF

COD

EM 1H 3W	35.00.003.01.23*
EM 3H 3W	35.00.003.01.24**

DALI

COD

EM 1H 5,4W DALI	35.00.004.01.54*
EM 3H 5,4W DALI	35.00.004.01.55**

* Applies to lengths equal to or greater than 1126 mm. ** Applies to lengths equal to or greater than 1407 mm.
> On request - External Emergency. Box dimensions: 45x120x360 mm.

WELINE TRIMLESS




OPAL or
MICRO PRISMATIC

EN

- > Trimless recessed modular lighting system for ceiling or wall installation.
- > Can be used as single luminaire, continuous-row system or geometric forms.
- > Illuminated corners guarantee uninterrupted light uniformity on continuous lines with 90° direction changes.
- > Micro prismatic Polycarbonate diffuser for glare control (UGR <19) or Opal Polycarbonate diffuser.
- > Extruded aluminium profile body.

FR

- > Système modulaire d'éclairage pour application encastrée sans cadre (trimless).
- > Peut être utilisé comme luminaire individuel, système en ligne continue ou formes géométriques.
- > Les angles éclairés assurent une lumière uniforme sans interruption dans les lignes continues avec des changements de direction à 90°.
- > Diffuseur en Polycarbonate Microprismatique pour contrôle de l'éblouissement (UGR <19) ou diffuseur Polycarbonate Opale.
- > Corps en profil d'aluminium extrudé.



QUICK INFO
GENERAL

Trimless
 IP43 (Optic)
 IP20
 IK05
 850°C
 Class I
 Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 172 lm/W
 3000 K, 4000 K
 CRI >80
 Lifetime 72 000 H
 L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
 ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS
GENERAL (Individual Luminaire)

IP44 (Optic)
 Class II

LED

2700 K, 5000 K, 6500 K
 Tunable White, RGB, RGBW
 CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM


Bluetooth

EMERGENCY

1 Hour, 3 Hours
 DALI 1 Hour, 3 Hours

SENSORS


Motion
 Ambient Light
 Motion & Ambient Light


WELINE TRIMLESS
OPAL DIFFUSER

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
564	1241	13	33.42.55.30.000	33.42.55.30.030
	2480	25	33.42.55.30.006	33.42.55.30.036
845	1860	19	33.42.55.30.001	33.42.55.30.031
	3720	38	33.42.55.30.007	33.42.55.30.037
1126	2480	25	33.42.55.30.002	33.42.55.30.032
	4961	50	33.42.55.30.008	33.42.55.30.038
1407	3100	31	33.42.55.30.003	33.42.55.30.033
	6201	63	33.42.55.30.009	33.42.55.30.039
2250	4959	50	33.42.55.30.004	33.42.55.30.034
	9921	101	33.42.55.30.010	33.42.55.30.040
2812	6200	63	33.42.55.30.005	33.42.55.30.035
	12401	126	33.42.55.30.011	33.42.55.30.041
Corner 607x607	2480	25	33.42.55.30.500	33.42.55.30.505
	4961	50	33.42.55.30.501	33.42.55.30.506
4000 K				
564	1298	13	33.42.55.30.060	33.42.55.30.090
	2595	25	33.42.55.30.066	33.42.55.30.096
845	1947	19	33.42.55.30.061	33.42.55.30.091
	3893	38	33.42.55.30.067	33.42.55.30.097
1126	2595	25	33.42.55.30.062	33.42.55.30.092
	5190	50	33.42.55.30.068	33.42.55.30.098
1407	3244	31	33.42.55.30.063	33.42.55.30.093
	6488	63	33.42.55.30.069	33.42.55.30.099
2250	5190	50	33.42.55.30.064	33.42.55.30.094
	10381	101	33.42.55.30.070	33.42.55.30.100
2812	6489	63	33.42.55.30.065	33.42.55.30.095
	12976	126	33.42.55.30.071	33.42.55.30.101
Corner 607x607	2595	25	33.42.55.30.510	33.42.55.30.515
	5190	50	33.42.55.30.511	33.42.55.30.516

DESCRIPTION

- 1 > DRIVER
- 2 > LED BOARD
- 3 > LED COVER
- 4 > REFLECTOR
- 5 > DIFFUSER

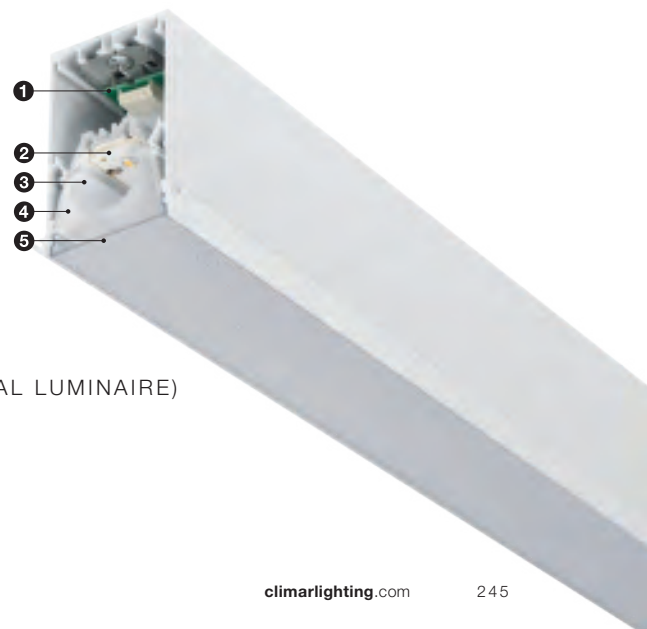
ON REQUEST (INDIVIDUAL LUMINAIRE)

- > IP44 (OPTIC);
- > CLASS II.

QUICK INFO

GENERAL

Trimless
IP43 (Optic)
IP20
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Micro Prismatic Polycarbonate
UGR <19

LED

Efficacy up to 182 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS

GENERAL (Individual Luminaire)

IP44 (Optic)
Class II

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS


Motion
Ambient Light
Motion & Ambient Light

WELINE TRIMLESS

MICRO PRISMATIC DIFFUSER - UGR <19


c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
564	506	7	33.42.55.30.024	33.42.55.30.054
	816	13	33.42.55.30.012	33.42.55.30.042
	1630	25	33.42.55.30.018	33.42.55.30.048
845	759	11	33.42.55.30.025	33.42.55.30.055
	1223	19	33.42.55.30.013	33.42.55.30.043
	2446	38	33.42.55.30.019	33.42.55.30.049
1126	1012	15	33.42.55.30.026	33.42.55.30.056
	1630	25	33.42.55.30.014	33.42.55.30.044
	3262	50	33.42.55.30.020	33.42.55.30.050
1407	1265	18	33.42.55.30.027	33.42.55.30.057
	2038	31	33.42.55.30.015	33.42.55.30.045
	4077	63	33.42.55.30.021	33.42.55.30.051
2250	2023	29	33.42.55.30.028	33.42.55.30.058
	3261	50	33.42.55.30.016	33.42.55.30.046
	6523	101	33.42.55.30.022	33.42.55.30.052
2812	2529	37	33.42.55.30.029	33.42.55.30.059
	4076	63	33.42.55.30.017	33.42.55.30.047
	8154	126	33.42.55.30.023	33.42.55.30.053
Corner 607x607	1012	15	33.42.55.30.502	33.42.55.30.507
	1630	25	33.42.55.30.503	33.42.55.30.508
	3262	50	33.42.55.30.504	33.42.55.30.509
4000 K				
564	529	7	33.42.55.30.084	33.42.55.30.114
	854	13	33.42.55.30.072	33.42.55.30.102
	1706	25	33.42.55.30.078	33.42.55.30.108
845	794	11	33.42.55.30.085	33.42.55.30.115
	1280	19	33.42.55.30.073	33.42.55.30.103
	2559	38	33.42.55.30.079	33.42.55.30.109
1126	1058	15	33.42.55.30.086	33.42.55.30.116
	1706	25	33.42.55.30.074	33.42.55.30.104
	3413	50	33.42.55.30.080	33.42.55.30.110
1407	1323	18	33.42.55.30.087	33.42.55.30.117
	2133	31	33.42.55.30.075	33.42.55.30.105
	4266	63	33.42.55.30.081	33.42.55.30.111
2250	2117	29	33.42.55.30.088	33.42.55.30.118
	3413	50	33.42.55.30.076	33.42.55.30.106
	6825	101	33.42.55.30.082	33.42.55.30.112
2812	2646	37	33.42.55.30.089	33.42.55.30.119
	4266	63	33.42.55.30.077	33.42.55.30.107
	8532	126	33.42.55.30.083	33.42.55.30.113
Corner 607x607	1058	15	33.42.55.30.512	33.42.55.30.517
	1706	25	33.42.55.30.513	33.42.55.30.518
	3413	50	33.42.55.30.514	33.42.55.30.519

Micro Prismatic Diffuser - UGR<19



WELINE

TRIMLESS

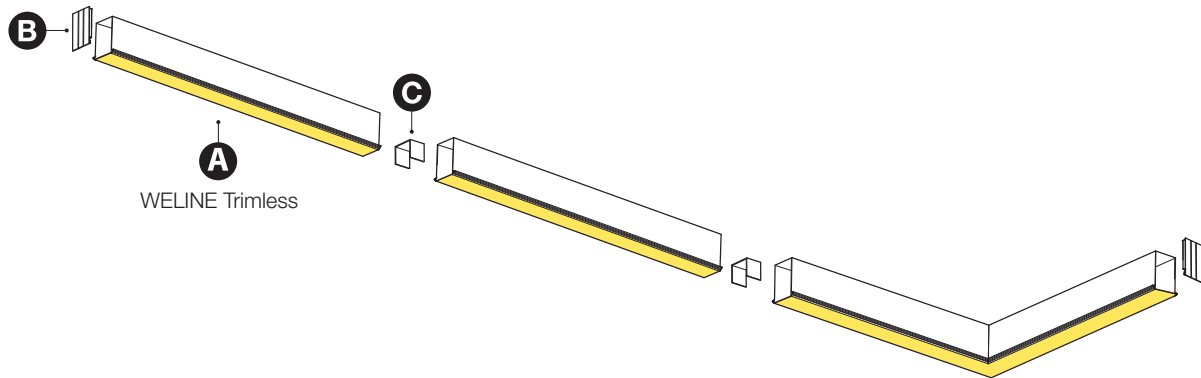

COMPONENTS



B END CAP (1pc)

COD

Matt White

35.42.55.00.000



C LINEAR COUPLER (1pc)

COD

Coupler

35.42.55.00.005

OPTIONS



EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF

COD

EM 1H 3W

35.00.003.01.23*

EM 3H 3W

35.00.003.01.24**

DALI

COD

EM 1H 5,4W DALI

35.00.004.01.54*

EM 3H 5,4W DALI

35.00.004.01.55**

* Applies to lengths equal to or greater than 1126 mm. ** Applies to lengths equal to or greater than 1407 mm.
> On request - External Emergency. Box dimensions: 45x120x360 mm.

WELINE EDGE

TRIMLESS

EN

- > Trimless recessed modular lighting system for plasterboard false ceilings.
- > Series of perimeter profiles for false ceiling application.
- > Can be used as single luminaire, continuous-row system or geometric forms.
- > Illuminated corners guarantee uninterrupted light uniformity on continuous lines with 90° direction changes.
- > Opal Polycarbonate diffuser.
- > Extruded aluminium profile body.

FR

- > Système modulaire d'éclairage pour application encastrée sans cadre (trimless) aux plafonds en plaques de plâtre.
- > Série de profilés pour une application à la périphérie des faux plafonds.
- > Peut être utilisé comme luminaire individuel, système en ligne continue ou formes géométriques.
- > Les angles éclairés assurent une lumière uniforme sans interruption dans les lignes continues avec des changements de direction à 90°.
- > Diffuseur en Polycarbonate Opale.
- > Corps en profil d'aluminium extrudé.

QUICK INFO
GENERAL

Trimless
IP43 (Optic)
IP20
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 172 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS
GENERAL (Individual Luminaire)

IP44 (Optic)
Class II

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

WELINE EDGE TRIMLESS
OPAL DIFFUSER

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
564	1241	13	33.42.55.31.000	33.42.55.31.030
705	1550	16	33.42.55.31.001	33.42.55.31.031
845	1860	19	33.42.55.31.002	33.42.55.31.032
986	2170	22	33.42.55.31.003	33.42.55.31.033
1126	2480	25	33.42.55.31.004	33.42.55.31.034
1407	3100	31	33.42.55.31.005	33.42.55.31.035
1688	3720	38	33.42.55.31.006	33.42.55.31.036
1969	4340	44	33.42.55.31.007	33.42.55.31.037
2250	4959	50	33.42.55.31.008	33.42.55.31.038
2531	5580	57	33.42.55.31.009	33.42.55.31.039
Corner 610x610	2480	25	33.42.55.31.500	33.42.55.31.503
4000 K				
564	1298	13	33.42.55.31.060	33.42.55.31.090
705	1622	16	33.42.55.31.061	33.42.55.31.091
845	1947	19	33.42.55.31.062	33.42.55.31.092
986	2271	22	33.42.55.31.063	33.42.55.31.093
1126	2595	25	33.42.55.31.064	33.42.55.31.094
1407	3244	31	33.42.55.31.065	33.42.55.31.095
1688	3893	38	33.42.55.31.066	33.42.55.31.096
1969	4542	44	33.42.55.31.067	33.42.55.31.097
2250	5190	50	33.42.55.31.068	33.42.55.31.098
2531	5839	57	33.42.55.31.069	33.42.55.31.099
Corner 610x610	2595	25	33.42.55.31.506	33.42.55.31.509

COMPONENTS
END CAP (1pc)



TYPE	COD
Matt White	35.42.55.30.000

LINEAR COUPLER (2pcs)

TYPE	COD
Coupler	35.42.85.20.000

ON REQUEST (INDIVIDUAL LUMINAIRE)

- > IP44 (OPTIC);
- > CLASS II.

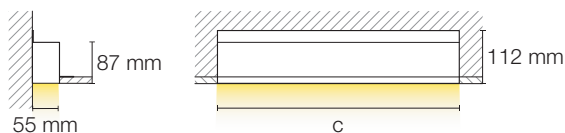

WELINE

DIRECT OR INDIRECT LIGHT

WALL



EN

- > Wall mounted luminaire with direct or indirect light output.
- > Direct or indirect light distribution defined by mounting.
- > Polycarbonate Opal diffuser.
- > Extruded aluminium profile body.
- > Supplied with die-cast end caps without screws.

FR

- > Luminaire mural à émission directe ou indirecte du flux lumineux.
- > Émission directe ou indirect défini à l'application.
- > Diffuseur en Polycarbonate Opale.
- > Corps en profil d'aluminium extrudé.
- > Fourni avec embouts injectées et sans vis.

DIRECT LIGHT



INDIRECT LIGHT



QUICK INFO

GENERAL

Wall
IP40
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 172 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=70°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING


 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

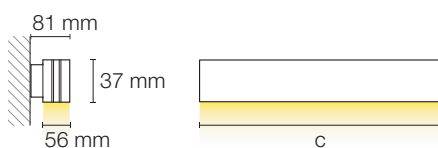


WELINE WALL - DIRECT OR INDIRECT LIGHT OPAL DIFFUSER

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
568	1241	13	33.42.55.40.008	—
	2480	25	33.42.55.40.012	—
849	1860	19	33.42.55.40.009	33.42.55.40.022
	3720	38	33.42.55.40.013	33.42.55.40.025
1130	2480	25	33.42.55.40.010	33.42.55.40.023
	4961	50	33.42.55.40.014	33.42.55.40.026
1411	3100	31	33.42.55.40.011	33.42.55.40.024
	6201	63	33.42.55.40.015	33.42.55.40.027
4000 K				
568	1298	13	33.42.55.40.036	—
	2595	25	33.42.55.40.040	—
849	1947	19	33.42.55.40.037	33.42.55.40.050
	3893	38	33.42.55.40.041	33.42.55.40.053
1130	2595	25	33.42.55.40.038	33.42.55.40.051
	5190	50	33.42.55.40.042	33.42.55.40.054
1411	3244	31	33.42.55.40.039	33.42.55.40.052
	6488	63	33.42.55.40.043	33.42.55.40.055

MATT ANODIZED FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
568	1241	13	33.42.55.40.000	—
	2480	25	33.42.55.40.004	—
849	1860	19	33.42.55.40.001	33.42.55.40.016
	3720	38	33.42.55.40.005	33.42.55.40.019
1130	2480	25	33.42.55.40.002	33.42.55.40.017
	4961	50	33.42.55.40.006	33.42.55.40.020
1411	3100	31	33.42.55.40.003	33.42.55.40.018
	6201	63	33.42.55.40.007	33.42.55.40.021
4000 K				
568	1298	13	33.42.55.40.028	—
	2595	25	33.42.55.40.032	—
849	1947	19	33.42.55.40.029	33.42.55.40.044
	3893	38	33.42.55.40.033	33.42.55.40.047
1130	2595	25	33.42.55.40.030	33.42.55.40.045
	5190	50	33.42.55.40.034	33.42.55.40.048
1411	3244	31	33.42.55.40.031	33.42.55.40.046
	6488	63	33.42.55.40.035	33.42.55.40.049



WELINE

DIRECT OR INDIRECT LIGHT

WALL

OPTIONS



EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF

COD

EM 1H 3W	35.00.003.01.23*
EM 3H 3W	35.00.003.01.24**

DALI

COD

EM 1H 5,4W DALI	35.00.004.01.54*
EM 3H 5,4W DALI	35.00.004.01.55**

* Applies to lengths equal to or greater than 1130 mm. ** Applies to lengths equal to or greater than 1411 mm.
> On request – External Emergency. Box dimensions: 45x120x360 mm.





OMEGA XS
SUSPENDED






OMEGA XS

DIRECT LIGHT

SUSPENDED

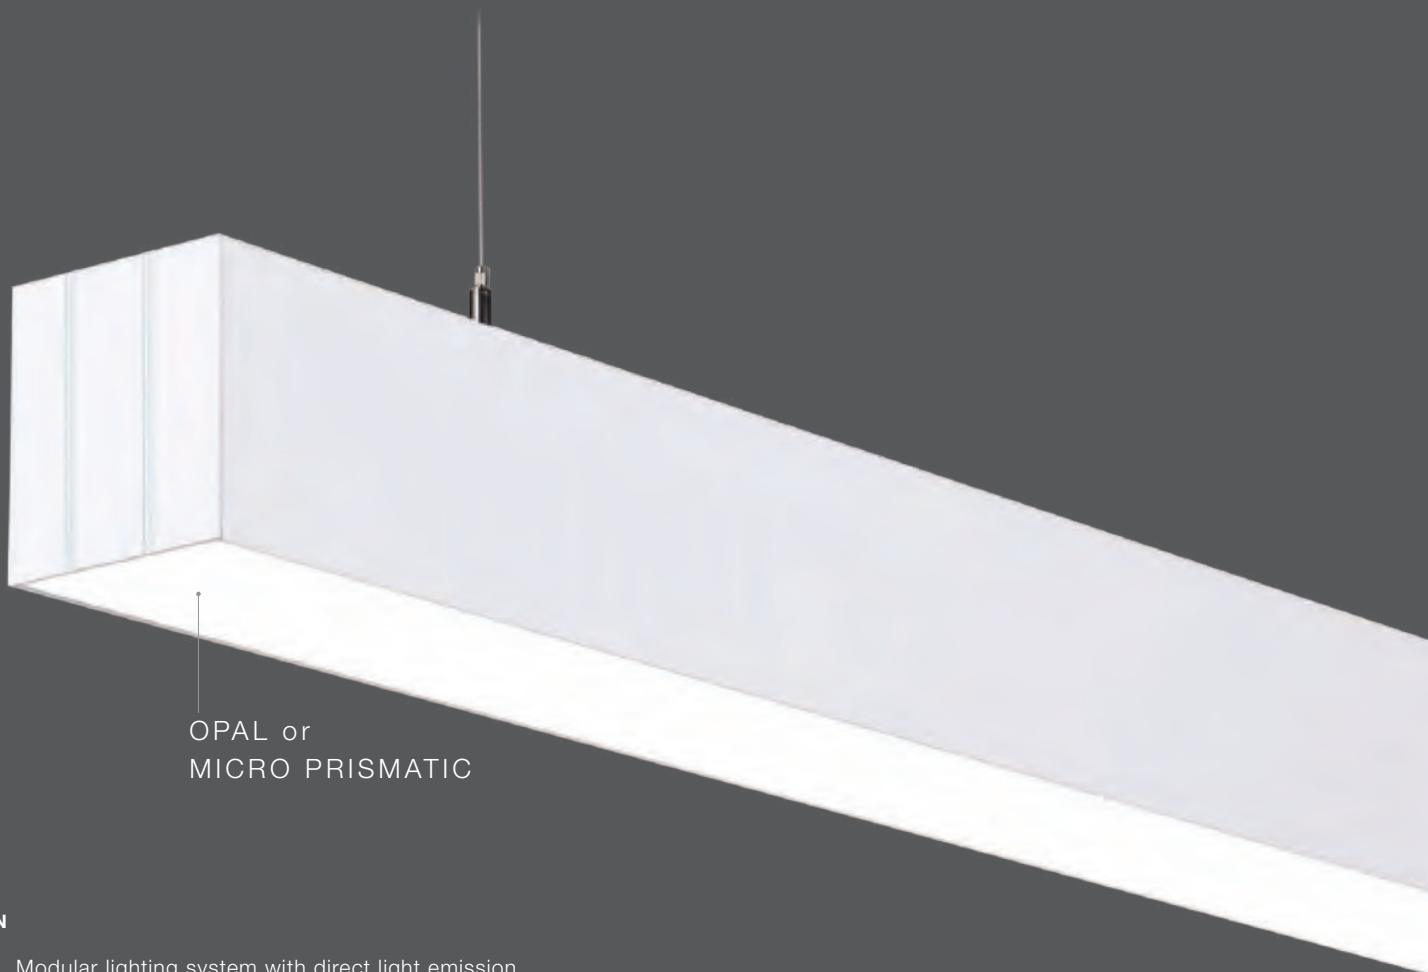

EN

- > Modular lighting system with direct light emission.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Can be used as single luminaire, continuous-row system or geometric forms.
- > Illuminated corners guarantee uninterrupted light uniformity on continuous lines with 90° direction changes.
- > Micro prismatic Polycarbonate diffuser for glare control (UGR <19) or Opal Polycarbonate diffuser.
- > Extruded aluminium profile body.
- > Die-cast end caps without screws.

FR

- > Système modulaire d'éclairage à émission directe du flux lumineux.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Peut être utilisé comme luminaire individuel, système en ligne continue ou formes géométriques.
- > Les angles éclairés assurent une lumière uniforme sans interruption dans les lignes continues avec des changements de direction à 90°.
- > Diffuseur en Polycarbonate Microprismatique pour contrôle de l'éblouissement (UGR <19) ou diffuseur Polycarbonate Opale.
- > Corps en profil d'aluminium extrudé.
- > Embouts injectées et sans vis.

QUICK INFO

GENERAL

Suspended
IP40
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 171 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS



Motion
Ambient Light
Motion & Ambient Light

OMEGA XS SUSPENDED - DIRECT LIGHT

OPAL DIFFUSER

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
845	1888	19	33.42.85.00.000	33.42.85.00.020
	3776	38	33.42.85.00.010	33.42.85.00.030
1126	2517	25	33.42.85.00.001	33.42.85.00.021
	5035	50	33.42.85.00.011	33.42.85.00.031
1407	3146	31	33.42.85.00.002	33.42.85.00.022
	6293	63	33.42.85.00.012	33.42.85.00.032
2250	5034	50	33.42.85.00.003	33.42.85.00.023
	10070	101	33.42.85.00.013	33.42.85.00.033
2812	6293	63	33.42.85.00.004	33.42.85.00.024
	12587	126	33.42.85.00.014	33.42.85.00.034
Corner 615x615	2517	25	33.42.85.00.502	33.42.85.00.510
	5035	50	33.42.85.00.503	33.42.85.00.511
4000 K				
845	1976	19	33.42.85.00.040	33.42.85.00.060
	3951	38	33.42.85.00.050	33.42.85.00.070
1126	2634	25	33.42.85.00.041	33.42.85.00.061
	5268	50	33.42.85.00.051	33.42.85.00.071
1407	3293	31	33.42.85.00.042	33.42.85.00.062
	6585	63	33.42.85.00.052	33.42.85.00.072
2250	5268	50	33.42.85.00.043	33.42.85.00.063
	10536	101	33.42.85.00.053	33.42.85.00.073
2812	6586	63	33.42.85.00.044	33.42.85.00.064
	13170	126	33.42.85.00.054	33.42.85.00.074
Corner 615x615	2634	25	33.42.85.00.518	33.42.85.00.526
	5268	50	33.42.85.00.519	33.42.85.00.527

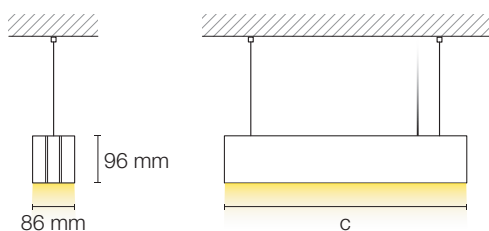

QUICK INFO

GENERAL

Suspended
IP40
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 171 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING


 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light


OMEGA XS SUSPENDED - DIRECT LIGHT
OPAL DIFFUSER

MATT ANODIZED FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
845	1888	19	33.42.85.00.005	33.42.85.00.025
	3776	38	33.42.85.00.015	33.42.85.00.035
1126	2517	25	33.42.85.00.006	33.42.85.00.026
	5035	50	33.42.85.00.016	33.42.85.00.036
1407	3146	31	33.42.85.00.007	33.42.85.00.027
	6293	63	33.42.85.00.017	33.42.85.00.037
2250	5034	50	33.42.85.00.008	33.42.85.00.028
	10070	101	33.42.85.00.018	33.42.85.00.038
2812	6293	63	33.42.85.00.009	33.42.85.00.029
	12587	126	33.42.85.00.019	33.42.85.00.039
Corner 615x615	2517	25	33.42.85.00.500	33.42.85.00.508
	5035	50	33.42.85.00.501	33.42.85.00.509
4000 K				
845	1976	19	33.42.85.00.045	33.42.85.00.065
	3951	38	33.42.85.00.055	33.42.85.00.075
1126	2634	25	33.42.85.00.046	33.42.85.00.066
	5268	50	33.42.85.00.056	33.42.85.00.076
1407	3293	31	33.42.85.00.047	33.42.85.00.067
	6585	63	33.42.85.00.057	33.42.85.00.077
2250	5268	50	33.42.85.00.048	33.42.85.00.068
	10536	101	33.42.85.00.058	33.42.85.00.078
2812	6586	63	33.42.85.00.049	33.42.85.00.069
	13170	126	33.42.85.00.059	33.42.85.00.079
Corner 615x615	2634	25	33.42.85.00.516	33.42.85.00.524
	5268	50	33.42.85.00.517	33.42.85.00.525

DESCRIPTION

- 1 > DRIVER
- 2 > LED BOARD
- 3 > LED COVER
- 4 > REFLECTOR
- 5 > DIFFUSER
- 6 > SUSPENSION

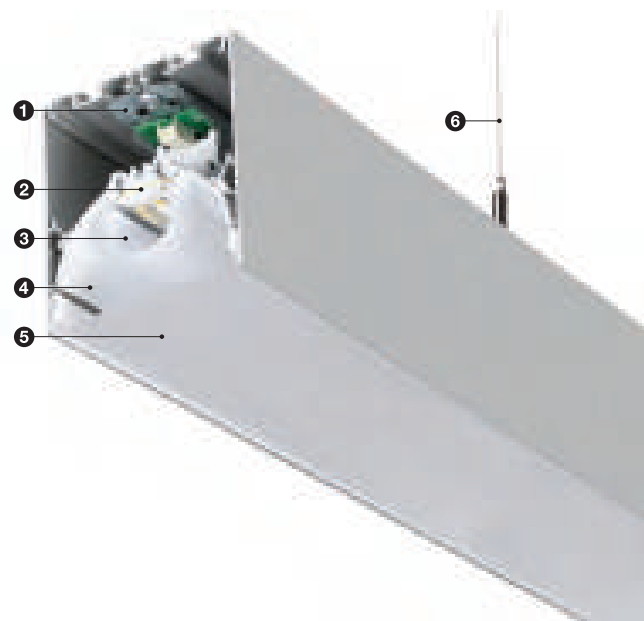

QUICK INFO

GENERAL

Suspended
IP40
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Micro Prismatic Polycarbonate
UGR <19

LED

Efficacy up to 171 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS


Motion
Ambient Light
Motion & Ambient Light

OMEGA XS SUSPENDED - DIRECT LIGHT MICRO PRISMATIC DIFFUSER - UGR <19

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
845	1422	19	33.42.85.00.080	33.42.85.00.100
	2843	38	33.42.85.00.090	33.42.85.00.110
1126	1895	25	33.42.85.00.081	33.42.85.00.101
	3791	50	33.42.85.00.091	33.42.85.00.111
1407	2369	31	33.42.85.00.082	33.42.85.00.102
	4739	63	33.42.85.00.092	33.42.85.00.112
2250	3790	50	33.42.85.00.083	33.42.85.00.103
	7583	101	33.42.85.00.093	33.42.85.00.113
2812	4739	63	33.42.85.00.084	33.42.85.00.104
	9478	126	33.42.85.00.094	33.42.85.00.114
Corner 615x615	1895	25	33.42.85.00.506	33.42.85.00.514
	3791	50	33.42.85.00.507	33.42.85.00.515
4000 K				
845	1488	19	33.42.85.00.120	33.42.85.00.140
	2975	38	33.42.85.00.130	33.42.85.00.150
1126	1983	25	33.42.85.00.121	33.42.85.00.141
	3967	50	33.42.85.00.131	33.42.85.00.151
1407	2480	31	33.42.85.00.122	33.42.85.00.142
	4959	63	33.42.85.00.132	33.42.85.00.152
2250	3967	50	33.42.85.00.123	33.42.85.00.143
	7934	101	33.42.85.00.133	33.42.85.00.153
2812	4959	63	33.42.85.00.124	33.42.85.00.144
	9917	126	33.42.85.00.134	33.42.85.00.154
Corner 615x615	1983	25	33.42.85.00.522	33.42.85.00.530
	3967	50	33.42.85.00.523	33.42.85.00.531

Micro Prismatic Diffuser - UGR<19



QUICK INFO

GENERAL

Suspended
IP40
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Micro Prismatic Polycarbonate
UGR <19

LED

Efficacy up to 171 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS


Motion
Ambient Light
Motion & Ambient Light

OMEGA XS SUSPENDED - DIRECT LIGHT
MICRO PRISMATIC DIFFUSER - UGR <19

MATT ANODIZED FINISHING


c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
845	1422	19	33.42.85.00.085	33.42.85.00.105
	2843	38	33.42.85.00.095	33.42.85.00.115
1126	1895	25	33.42.85.00.086	33.42.85.00.106
	3791	50	33.42.85.00.096	33.42.85.00.116
1407	2369	31	33.42.85.00.087	33.42.85.00.107
	4739	63	33.42.85.00.097	33.42.85.00.117
2250	3790	50	33.42.85.00.088	33.42.85.00.108
	7583	101	33.42.85.00.098	33.42.85.00.118
2812	4739	63	33.42.85.00.089	33.42.85.00.109
	9478	126	33.42.85.00.099	33.42.85.00.119
Corner 615x615	1895	25	33.42.85.00.504	33.42.85.00.512
	3791	50	33.42.85.00.505	33.42.85.00.513
4000 K				
845	1488	19	33.42.85.00.125	33.42.85.00.145
	2975	38	33.42.85.00.135	33.42.85.00.155
1126	1983	25	33.42.85.00.126	33.42.85.00.146
	3967	50	33.42.85.00.136	33.42.85.00.156
1407	2480	31	33.42.85.00.127	33.42.85.00.147
	4959	63	33.42.85.00.137	33.42.85.00.157
2250	3967	50	33.42.85.00.128	33.42.85.00.148
	7934	101	33.42.85.00.138	33.42.85.00.158
2812	4959	63	33.42.85.00.129	33.42.85.00.149
	9917	126	33.42.85.00.139	33.42.85.00.159
Corner 615x615	1983	25	33.42.85.00.520	33.42.85.00.528
	3967	50	33.42.85.00.521	33.42.85.00.529

Micro Prismatic Diffuser - UGR<19





OMEGA XS DIRECT LIGHT SUSPENDED

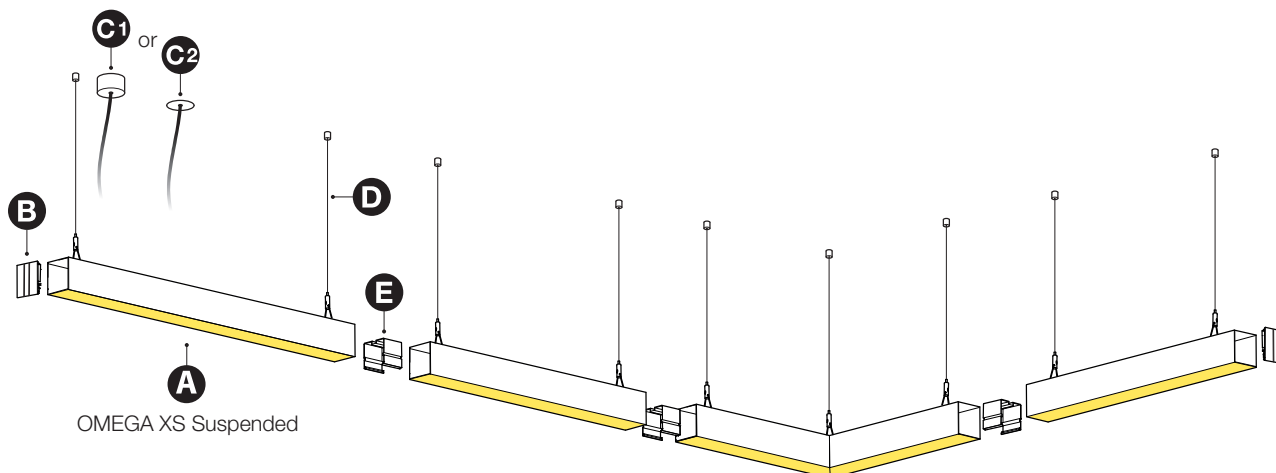

COMPONENTS



B END CAP (1pc)

COD

Matt White	35.42.85.00.001
Matt Anodized Similar Painting	35.42.85.00.002



C1 SURFACE CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø62x36 mm	35.42.001.01.80	35.42.001.01.88	35.42.001.01.96
ON/OFF + EM	Ø62x36 mm	35.42.001.01.81	35.42.001.01.89	35.42.001.01.97
DALI	Ø62x36 mm	35.42.001.01.82	35.42.001.01.90	35.42.001.01.98
DALI + EM	Ø103x36 mm	35.42.001.01.83	35.42.001.01.91	35.42.001.01.99



C2 RECESSED CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø80 mm	35.42.001.01.84	35.42.001.01.92	35.42.002.01.00
ON/OFF + EM	Ø80 mm	35.42.001.01.85	35.42.001.01.93	35.42.002.01.01
DALI	Ø80 mm	35.42.001.01.86	35.42.001.01.94	35.42.002.01.02
DALI + EM	Ø80 mm	35.42.001.01.87	35.42.001.01.95	35.42.002.01.03



D SUSPENSION SYSTEM (2pcs)

TYPE	1m	3m	5m
Matt White + Stainless Steel Cable	35.42.000.01.54	35.42.000.01.62	35.42.001.01.26



E LINEAR COUPLER (1pc)

COD

Coupler	35.42.85.00.000
---------	-----------------

OPTIONS



EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF	COD
EM 1H 3W	35.00.003.01.23*
EM 3H 3W	35.00.003.01.24**
DALI	COD
EM 1H 5,4W DALI	35.00.004.01.54*
EM 3H 5,4W DALI	35.00.004.01.55**

* Applies to lengths equal to or greater than 1126 mm. ** Applies to lengths equal to or greater than 1407 mm.
 > On request – External Emergency. Box dimensions: 45x120x360 mm.



OMEGA XS

SURFACE



OPAL or
MICRO PRISMATIC

EN

- > Modular lighting system for surface mounting.
- > Can be used as single luminaire, continuous-row system or geometric forms.
- > Illuminated corners guarantee uninterrupted light uniformity on continuous lines with 90° direction changes.
- > Micro prismatic Polycarbonate diffuser for glare control (UGR <19) or Opal Polycarbonate diffuser.
- > Extruded aluminium profile body.
- > Die-cast end caps without screws.

FR

- > Système modulaire d'éclairage pour une application apparente.
- > Peut être utilisé comme luminaire individuel, système en ligne continue ou formes géométriques.
- > Les angles éclairés assurent une lumière uniforme sans interruption dans les lignes continues avec des changements de direction à 90°.
- > Diffuseur en Polycarbonate Microprismatique pour contrôle de l'éblouissement (UGR <19) ou diffuseur Polycarbonate Opale.
- > Corps en profil d'aluminium extrudé.
- > Embouts injectées et sans vis.

QUICK INFO

GENERAL

Surface
IP40
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 171 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS



Motion
Ambient Light
Motion & Ambient Light

OMEGA XS SURFACE

OPAL DIFFUSER

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
845	1888	19	33.42.85.10.000	33.42.85.10.020
	3776	38	33.42.85.10.010	33.42.85.10.030
1126	2517	25	33.42.85.10.001	33.42.85.10.021
	5035	50	33.42.85.10.011	33.42.85.10.031
1407	3146	31	33.42.85.10.002	33.42.85.10.022
	6293	63	33.42.85.10.012	33.42.85.10.032
2250	5034	50	33.42.85.10.003	33.42.85.10.023
	10070	101	33.42.85.10.013	33.42.85.10.033
2812	6293	63	33.42.85.10.004	33.42.85.10.024
	12587	126	33.42.85.10.014	33.42.85.10.034
Corner 615x615	2517	25	33.42.85.10.502	33.42.85.10.510
	5035	50	33.42.85.10.503	33.42.85.10.511
4000 K				
845	1976	19	33.42.85.10.040	33.42.85.10.060
	3951	38	33.42.85.10.050	33.42.85.10.070
1126	2634	25	33.42.85.10.041	33.42.85.10.061
	5268	50	33.42.85.10.051	33.42.85.10.071
1407	3293	31	33.42.85.10.042	33.42.85.10.062
	6585	63	33.42.85.10.052	33.42.85.10.072
2250	5268	50	33.42.85.10.043	33.42.85.10.063
	10536	101	33.42.85.10.053	33.42.85.10.073
2812	6586	63	33.42.85.10.044	33.42.85.10.064
	13170	126	33.42.85.10.054	33.42.85.10.074
Corner 615x615	2634	25	33.42.85.10.518	33.42.85.10.526
	5268	50	33.42.85.10.519	33.42.85.10.527

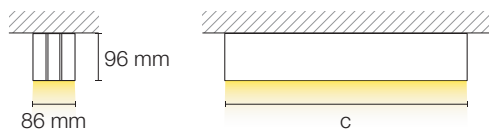

QUICK INFO

GENERAL

Surface
IP40
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 171 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING


Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light



OMEGA XS SURFACE


OPAL DIFFUSER

MATT ANODIZED FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
845	1888	19	33.42.85.10.005	33.42.85.10.025
	3776	38	33.42.85.10.015	33.42.85.10.035
1126	2517	25	33.42.85.10.006	33.42.85.10.026
	5035	50	33.42.85.10.016	33.42.85.10.036
1407	3146	31	33.42.85.10.007	33.42.85.10.027
	6293	63	33.42.85.10.017	33.42.85.10.037
2250	5034	50	33.42.85.10.008	33.42.85.10.028
	10070	101	33.42.85.10.018	33.42.85.10.038
2812	6293	63	33.42.85.10.009	33.42.85.10.029
	12587	126	33.42.85.10.019	33.42.85.10.039
Corner 615x615	2517	25	33.42.85.10.500	33.42.85.10.508
	5035	50	33.42.85.10.501	33.42.85.10.509
4000 K				
845	1976	19	33.42.85.10.045	33.42.85.10.065
	3951	38	33.42.85.10.055	33.42.85.10.075
1126	2634	25	33.42.85.10.046	33.42.85.10.066
	5268	50	33.42.85.10.056	33.42.85.10.076
1407	3293	31	33.42.85.10.047	33.42.85.10.067
	6585	63	33.42.85.10.057	33.42.85.10.077
2250	5268	50	33.42.85.10.048	33.42.85.10.068
	10536	101	33.42.85.10.058	33.42.85.10.078
2812	6586	63	33.42.85.10.049	33.42.85.10.069
	13170	126	33.42.85.10.059	33.42.85.10.079
Corner 615x615	2634	25	33.42.85.10.516	33.42.85.10.524
	5268	50	33.42.85.10.517	33.42.85.10.525

DESCRIPTION

- 1 > DRIVER
- 2 > LED BOARD
- 3 > LED COVER
- 4 > REFLECTOR
- 5 > DIFFUSER

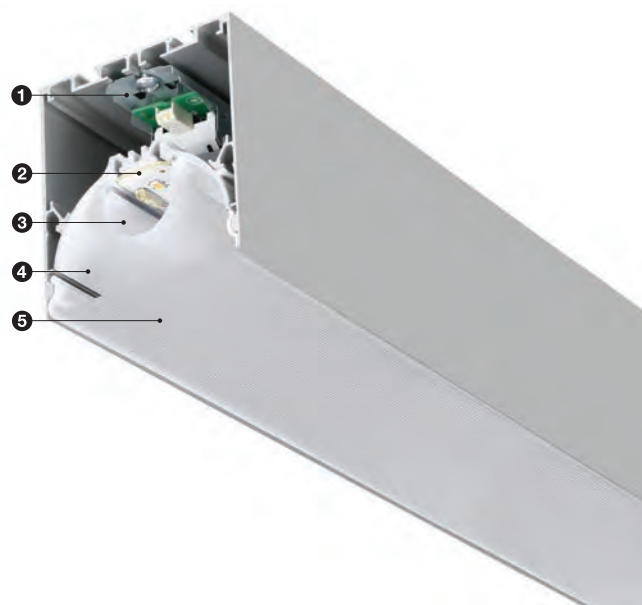

QUICK INFO

GENERAL

Surface
IP40
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Micro Prismatic Polycarbonate
UGR <19

LED

Efficacy up to 171 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light


OMEGA XS SURFACE

MICRO PRISMATIC DIFFUSER - UGR <19

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
845	1422	19	33.42.85.10.080	33.42.85.10.100
	2843	38	33.42.85.10.090	33.42.85.10.110
1126	1895	25	33.42.85.10.081	33.42.85.10.101
	3791	50	33.42.85.10.091	33.42.85.10.111
1407	2369	31	33.42.85.10.082	33.42.85.10.102
	4739	63	33.42.85.10.092	33.42.85.10.112
2250	3790	50	33.42.85.10.083	33.42.85.10.103
	7583	101	33.42.85.10.093	33.42.85.10.113
2812	4739	63	33.42.85.10.084	33.42.85.10.104
	9478	126	33.42.85.10.094	33.42.85.10.114
Corner 615x615	1895	25	33.42.85.10.506	33.42.85.10.514
	3791	50	33.42.85.10.507	33.42.85.10.515
4000 K				
845	1488	19	33.42.85.10.120	33.42.85.10.140
	2975	38	33.42.85.10.130	33.42.85.10.150
1126	1983	25	33.42.85.10.121	33.42.85.10.141
	3967	50	33.42.85.10.131	33.42.85.10.151
1407	2480	31	33.42.85.10.122	33.42.85.10.142
	4959	63	33.42.85.10.132	33.42.85.10.152
2250	3967	50	33.42.85.10.123	33.42.85.10.143
	7934	101	33.42.85.10.133	33.42.85.10.153
2812	4959	63	33.42.85.10.124	33.42.85.10.144
	9917	126	33.42.85.10.134	33.42.85.10.154
Corner 615x615	1983	25	33.42.85.10.522	33.42.85.10.530
	3967	50	33.42.85.10.523	33.42.85.10.531

Micro Prismatic Diffuser - UGR<19



QUICK INFO

GENERAL

Surface
IP40
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Micro Prismatic Polycarbonate
UGR <19

LED

Efficacy up to 171 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Matt Anodized

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light


OMEGA XS SURFACE

MICRO PRISMATIC DIFFUSER - UGR <19

MATT ANODIZED FINISHING


c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
845	1422	19	33.42.85.10.085	33.42.85.10.105
	2843	38	33.42.85.10.095	33.42.85.10.115
1126	1895	25	33.42.85.10.086	33.42.85.10.106
	3791	50	33.42.85.10.096	33.42.85.10.116
1407	2369	31	33.42.85.10.087	33.42.85.10.107
	4739	63	33.42.85.10.097	33.42.85.10.117
2250	3790	50	33.42.85.10.088	33.42.85.10.108
	7583	101	33.42.85.10.098	33.42.85.10.118
2812	4739	63	33.42.85.10.089	33.42.85.10.109
	9478	126	33.42.85.10.099	33.42.85.10.119
Corner 615x615	1895	25	33.42.85.10.504	33.42.85.10.512
	3791	50	33.42.85.10.505	33.42.85.10.513
4000 K				
845	1488	19	33.42.85.10.125	33.42.85.10.145
	2975	38	33.42.85.10.135	33.42.85.10.155
1126	1983	25	33.42.85.10.126	33.42.85.10.146
	3967	50	33.42.85.10.136	33.42.85.10.156
1407	2480	31	33.42.85.10.127	33.42.85.10.147
	4959	63	33.42.85.10.137	33.42.85.10.157
2250	3967	50	33.42.85.10.128	33.42.85.10.148
	7934	101	33.42.85.10.138	33.42.85.10.158
2812	4959	63	33.42.85.10.129	33.42.85.10.149
	9917	126	33.42.85.10.139	33.42.85.10.159
Corner 615x615	1983	25	33.42.85.10.520	33.42.85.10.528
	3967	50	33.42.85.10.521	33.42.85.10.529

Micro Prismatic Diffuser - UGR<19



OMEGA XS

SURFACE

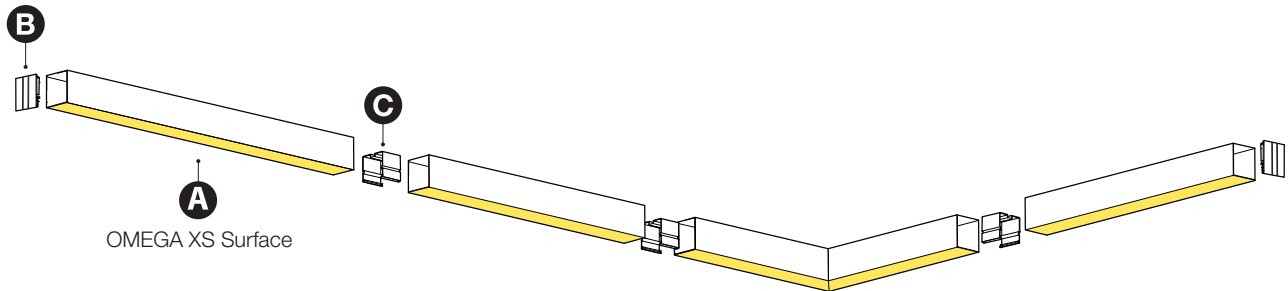

COMPONENTS



B END CAP (1pc)

	COD
Matt White	35.42.85.00.001
Matt Anodized Similar Painting	35.42.85.00.002



C LINEAR COUPLER (1pc)

	COD
Coupler	35.42.85.00.000

OPTIONS



EMERGENCY (EM) - SELF-TEST INTEGRATED


ON/OFF	COD
EM 1H 3W	35.00.003.01.23*
EM 3H 3W	35.00.003.01.24**

DALI	COD
EM 1H 5,4W DALI	35.00.004.01.54*
EM 3H 5,4W DALI	35.00.004.01.55**

* Applies to lengths equal to or greater than 1126 mm. ** Applies to lengths equal to or greater than 1407 mm.
 > On request – External Emergency. Box dimensions: 45x120x360 mm.

OMEGA XS

RECESSED

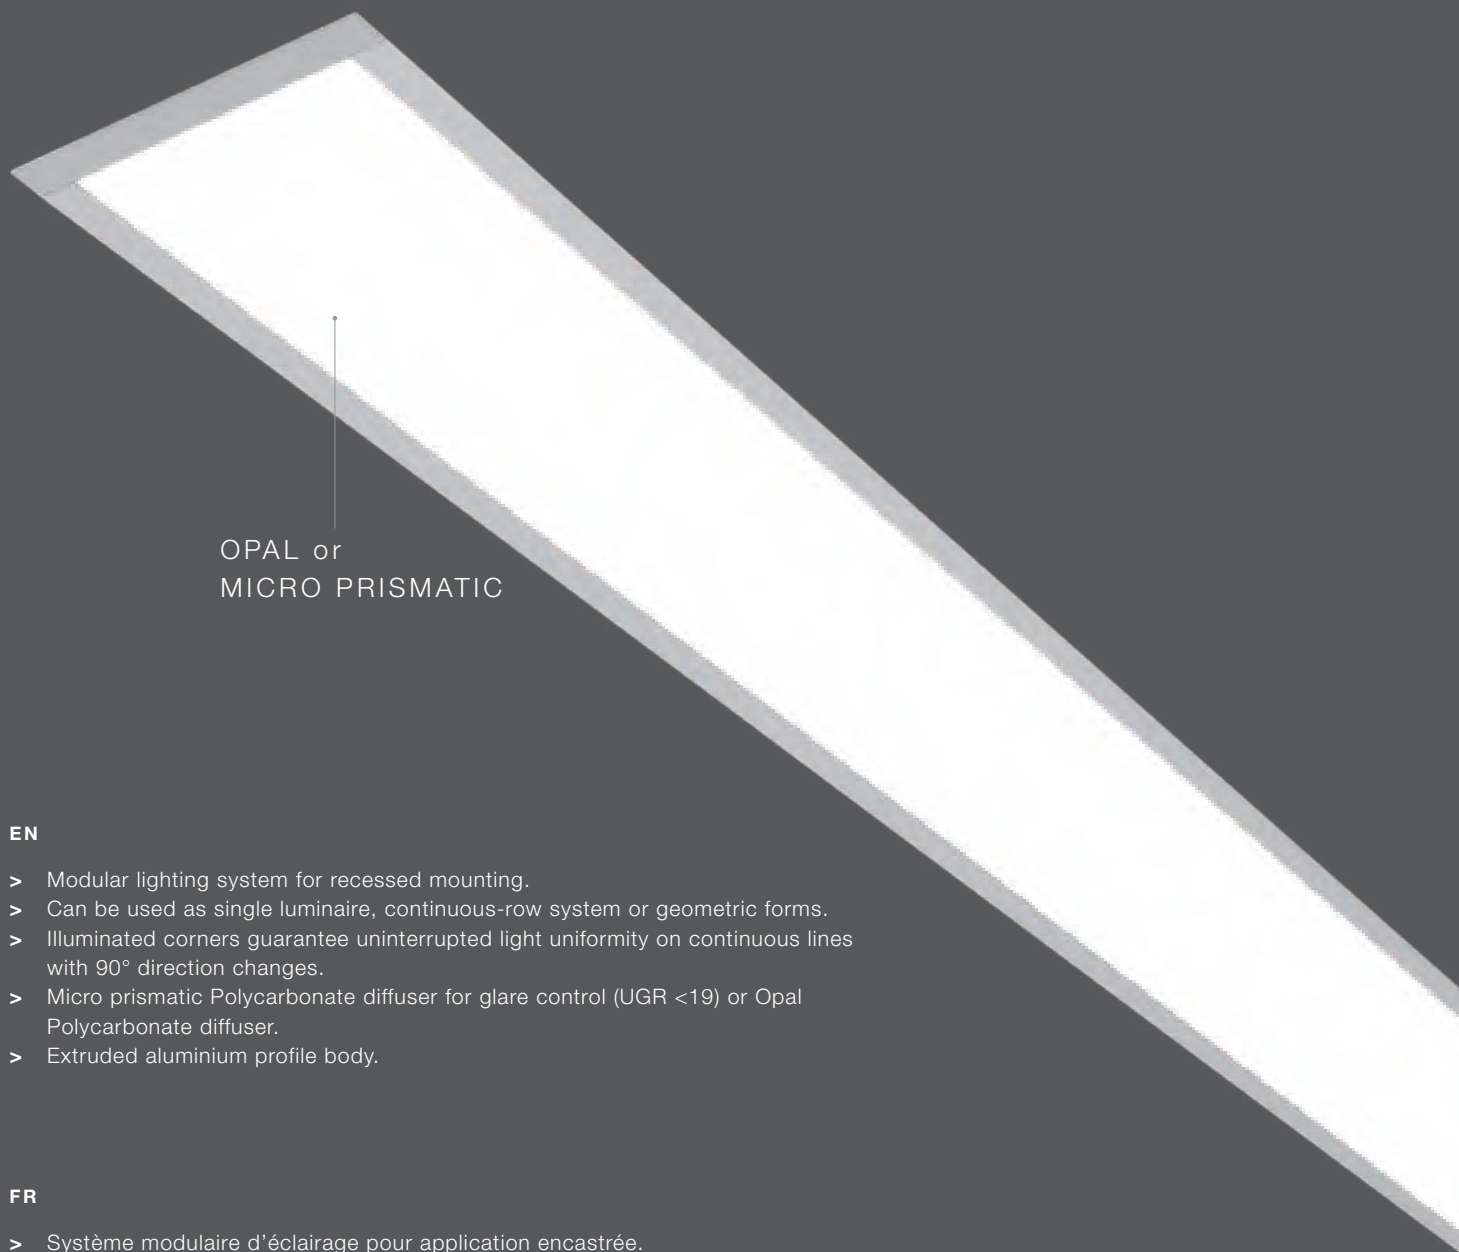

OPAL or
MICRO PRISMATIC

EN

- > Modular lighting system for recessed mounting.
- > Can be used as single luminaire, continuous-row system or geometric forms.
- > Illuminated corners guarantee uninterrupted light uniformity on continuous lines with 90° direction changes.
- > Micro prismatic Polycarbonate diffuser for glare control (UGR <19) or Opal Polycarbonate diffuser.
- > Extruded aluminium profile body.

FR

- > Système modulaire d'éclairage pour application encastrée.
- > Peut être utilisé comme luminaire individuel, système en ligne continue ou formes géométriques.
- > Les angles éclairés assurent une lumière uniforme sans interruption dans les lignes continues avec des changements de direction à 90°.
- > Diffuseur en Polycarbonate Micropismatique pour contrôle de l'éblouissement (UGR <19) ou diffuseur Polycarbonate Opale.
- > Corps en profil d'aluminium extrudé.

QUICK INFO
GENERAL

Recessed
 IP43 (Optic)
 IP20
 IK05
 850°C
 Class I
 Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 171 lm/W
 3000 K, 4000 K
 CRI >80
 Lifetime 72 000 H
 L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
 ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS
GENERAL (Individual Luminaire)

IP44 (Optic)
 Class II

LED

2700 K, 5000 K, 6500 K
 Tunable White, RGB, RGBW
 CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING


Other Colours

EMERGENCY

1 Hour, 3 Hours
 DALI 1 Hour, 3 Hours

SENSORS


Motion
 Ambient Light
 Motion & Ambient Light


OMEGA XS RECESSED
OPAL DIFFUSER
MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
845	1888	19	33.42.85.20.000	33.42.85.20.020
	3776	38	33.42.85.20.010	33.42.85.20.030
1126	2517	25	33.42.85.20.001	33.42.85.20.021
	5035	50	33.42.85.20.011	33.42.85.20.031
1407	3146	31	33.42.85.20.002	33.42.85.20.022
	6293	63	33.42.85.20.012	33.42.85.20.032
2250	5034	50	33.42.85.20.003	33.42.85.20.023
	10070	101	33.42.85.20.013	33.42.85.20.033
2812	6293	63	33.42.85.20.004	33.42.85.20.024
	12587	126	33.42.85.20.014	33.42.85.20.034
Corner 625x625	2517	25	33.42.85.20.502	33.42.85.20.510
	5035	50	33.42.85.20.503	33.42.85.20.511
4000 K				
845	1976	19	33.42.85.20.040	33.42.85.20.060
	3951	38	33.42.85.20.050	33.42.85.20.070
1126	2634	25	33.42.85.20.041	33.42.85.20.061
	5268	50	33.42.85.20.051	33.42.85.20.071
1407	3293	31	33.42.85.20.042	33.42.85.20.062
	6585	63	33.42.85.20.052	33.42.85.20.072
2250	5268	50	33.42.85.20.043	33.42.85.20.063
	10536	101	33.42.85.20.053	33.42.85.20.073
2812	6586	63	33.42.85.20.044	33.42.85.20.064
	13170	126	33.42.85.20.054	33.42.85.20.074
Corner 625x625	2634	25	33.42.85.20.518	33.42.85.20.526
	5268	50	33.42.85.20.519	33.42.85.20.527

ON REQUEST (INDIVIDUAL LUMINAIRE)

- > IP44 (OPTIC);
- > CLASS II.



QUICK INFO

GENERAL

Recessed
IP43 (Optic)
IP20
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 171 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Matt Anodized

OPTIONS

GENERAL (Individual Luminaire)

IP44 (Optic)
Class II

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING


Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light



OMEGA XS RECESSED


OPAL DIFFUSER

MATT ANODIZED FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
845	1888	19	33.42.85.20.005	33.42.85.20.025
	3776	38	33.42.85.20.015	33.42.85.20.035
1126	2517	25	33.42.85.20.006	33.42.85.20.026
	5035	50	33.42.85.20.016	33.42.85.20.036
1407	3146	31	33.42.85.20.007	33.42.85.20.027
	6293	63	33.42.85.20.017	33.42.85.20.037
2250	5034	50	33.42.85.20.008	33.42.85.20.028
	10070	101	33.42.85.20.018	33.42.85.20.038
2812	6293	63	33.42.85.20.009	33.42.85.20.029
	12587	126	33.42.85.20.019	33.42.85.20.039
Corner 625x625	2517	25	33.42.85.20.500	33.42.85.20.508
	5035	50	33.42.85.20.501	33.42.85.20.509
4000 K				
845	1976	19	33.42.85.20.045	33.42.85.20.065
	3951	38	33.42.85.20.055	33.42.85.20.075
1126	2634	25	33.42.85.20.046	33.42.85.20.066
	5268	50	33.42.85.20.056	33.42.85.20.076
1407	3293	31	33.42.85.20.047	33.42.85.20.067
	6585	63	33.42.85.20.057	33.42.85.20.077
2250	5268	50	33.42.85.20.048	33.42.85.20.068
	10536	101	33.42.85.20.058	33.42.85.20.078
2812	6586	63	33.42.85.20.049	33.42.85.20.069
	13170	126	33.42.85.20.059	33.42.85.20.079
Corner 625x625	2634	25	33.42.85.20.516	33.42.85.20.524
	5268	50	33.42.85.20.517	33.42.85.20.525

DESCRIPTION

- 1 > DRIVER
- 2 > LED BOARD
- 3 > LED COVER
- 4 > REFLECTOR
- 5 > DIFFUSER

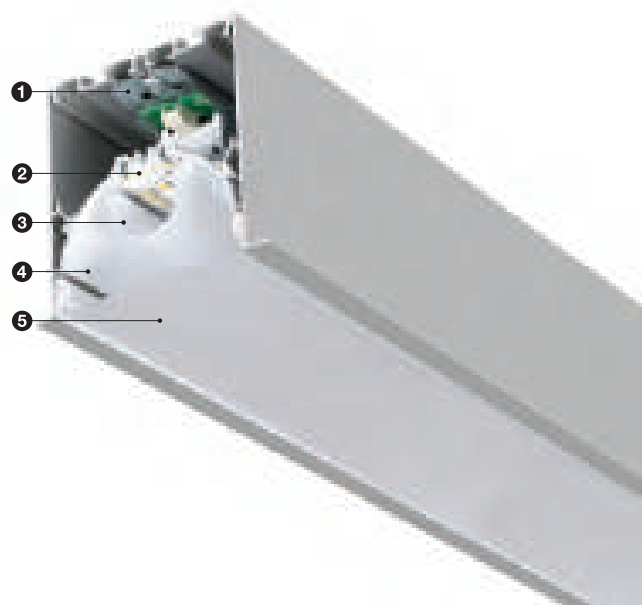

QUICK INFO
GENERAL

Recessed
 IP43 (Optic)
 IP20
 IK05
 850°C
 Class I
 Ta= -20°C +35°C

OPTIC

Micro Prismatic Polycarbonate
 UGR <19

LED

Efficacy up to 171 lm/W
 3000 K, 4000 K
 CRI >80
 Lifetime 72 000 H
 L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
 ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS
GENERAL (Individual Luminaire)

IP44 (Optic)
 Class II

LED

2700 K, 5000 K, 6500 K
 Tunable White, RGB, RGBW
 CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
 DALI 1 Hour, 3 Hours


SENSORS

Motion
 Ambient Light
 Motion & Ambient Light

OMEGA XS RECESSED
MICRO PRISMATIC DIFFUSER - UGR <19
MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
845	1422	19	33.42.85.20.080	33.42.85.20.100
	2843	38	33.42.85.20.090	33.42.85.20.110
1126	1895	25	33.42.85.20.081	33.42.85.20.101
	3791	50	33.42.85.20.091	33.42.85.20.111
1407	2369	31	33.42.85.20.082	33.42.85.20.102
	4739	63	33.42.85.20.092	33.42.85.20.112
2250	3790	50	33.42.85.20.083	33.42.85.20.103
	7583	101	33.42.85.20.093	33.42.85.20.113
2812	4739	63	33.42.85.20.084	33.42.85.20.104
	9478	126	33.42.85.20.094	33.42.85.20.114
Corner 625x625	1895	25	33.42.85.20.506	33.42.85.20.514
	3791	50	33.42.85.20.507	33.42.85.20.515
4000 K				
845	1488	19	33.42.85.20.120	33.42.85.20.140
	2975	38	33.42.85.20.130	33.42.85.20.150
1126	1983	25	33.42.85.20.121	33.42.85.20.141
	3967	50	33.42.85.20.131	33.42.85.20.151
1407	2480	31	33.42.85.20.122	33.42.85.20.142
	4959	63	33.42.85.20.132	33.42.85.20.152
2250	3967	50	33.42.85.20.123	33.42.85.20.143
	7934	101	33.42.85.20.133	33.42.85.20.153
2812	4959	63	33.42.85.20.124	33.42.85.20.144
	9917	126	33.42.85.20.134	33.42.85.20.154
Corner 625x625	1983	25	33.42.85.20.522	33.42.85.20.530
	3967	50	33.42.85.20.523	33.42.85.20.531

Micro Prismatic Diffuser - UGR<19



QUICK INFO

GENERAL

Recessed
IP43 (Optic)
IP20
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Micro Prismatic Polycarbonate
UGR <19

LED

Efficacy up to 171 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Matt Anodized

OPTIONS

GENERAL (Individual Luminaire)

IP44 (Optic)
Class II

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING



Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light


OMEGA XS RECESSED

MICRO PRISMATIC DIFFUSER - UGR <19

MATT ANODIZED FINISHING


c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
845	1422	19	33.42.85.20.085	33.42.85.20.105
	2843	38	33.42.85.20.095	33.42.85.20.115
1126	1895	25	33.42.85.20.086	33.42.85.20.106
	3791	50	33.42.85.20.096	33.42.85.20.116
1407	2369	31	33.42.85.20.087	33.42.85.20.107
	4739	63	33.42.85.20.097	33.42.85.20.117
2250	3790	50	33.42.85.20.088	33.42.85.20.108
	7583	101	33.42.85.20.098	33.42.85.20.118
2812	4739	63	33.42.85.20.089	33.42.85.20.109
	9478	126	33.42.85.20.099	33.42.85.20.119
Corner 625x625	1895	25	33.42.85.20.504	33.42.85.20.512
	3791	50	33.42.85.20.505	33.42.85.20.513
4000 K				
845	1488	19	33.42.85.20.125	33.42.85.20.145
	2975	38	33.42.85.20.135	33.42.85.20.155
1126	1983	25	33.42.85.20.126	33.42.85.20.146
	3967	50	33.42.85.20.136	33.42.85.20.156
1407	2480	31	33.42.85.20.127	33.42.85.20.147
	4959	63	33.42.85.20.137	33.42.85.20.157
2250	3967	50	33.42.85.20.128	33.42.85.20.148
	7934	101	33.42.85.20.138	33.42.85.20.158
2812	4959	63	33.42.85.20.129	33.42.85.20.149
	9917	126	33.42.85.20.139	33.42.85.20.159
Corner 625x625	1983	25	33.42.85.20.520	33.42.85.20.528
	3967	50	33.42.85.20.521	33.42.85.20.529

Micro Prismatic Diffuser - UGR<19



OMEGA XS

RECESSED

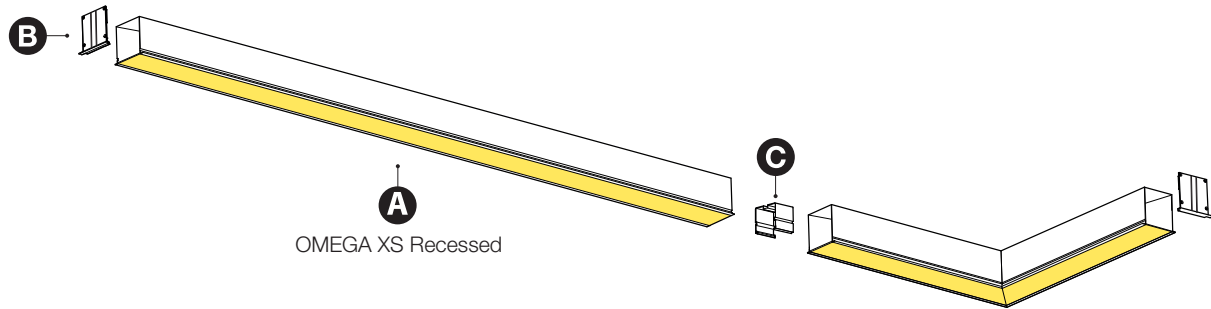

COMPONENTS



B END CAP (1pc)

COD

Matt White	35.42.85.20.001
Matt Anodized Similar Painting	35.42.85.20.002



C LINEAR COUPLER (2pcs)

COD

Coupler	35.42.85.00.000
---------	-----------------

OPTIONS



EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF

COD

EM 1H 3W	35.00.003.01.23*
EM 3H 3W	35.00.003.01.24**

DALI


COD

EM 1H 5,4W DALI	35.00.004.01.54*
EM 3H 5,4W DALI	35.00.004.01.55**

* Applies to lengths equal to or greater than 1126 mm. ** Applies to lengths equal to or greater than 1407 mm.
 > On request – External Emergency. Box dimensions: 45x120x360 mm.

OMEGA XS

TRIMLESS

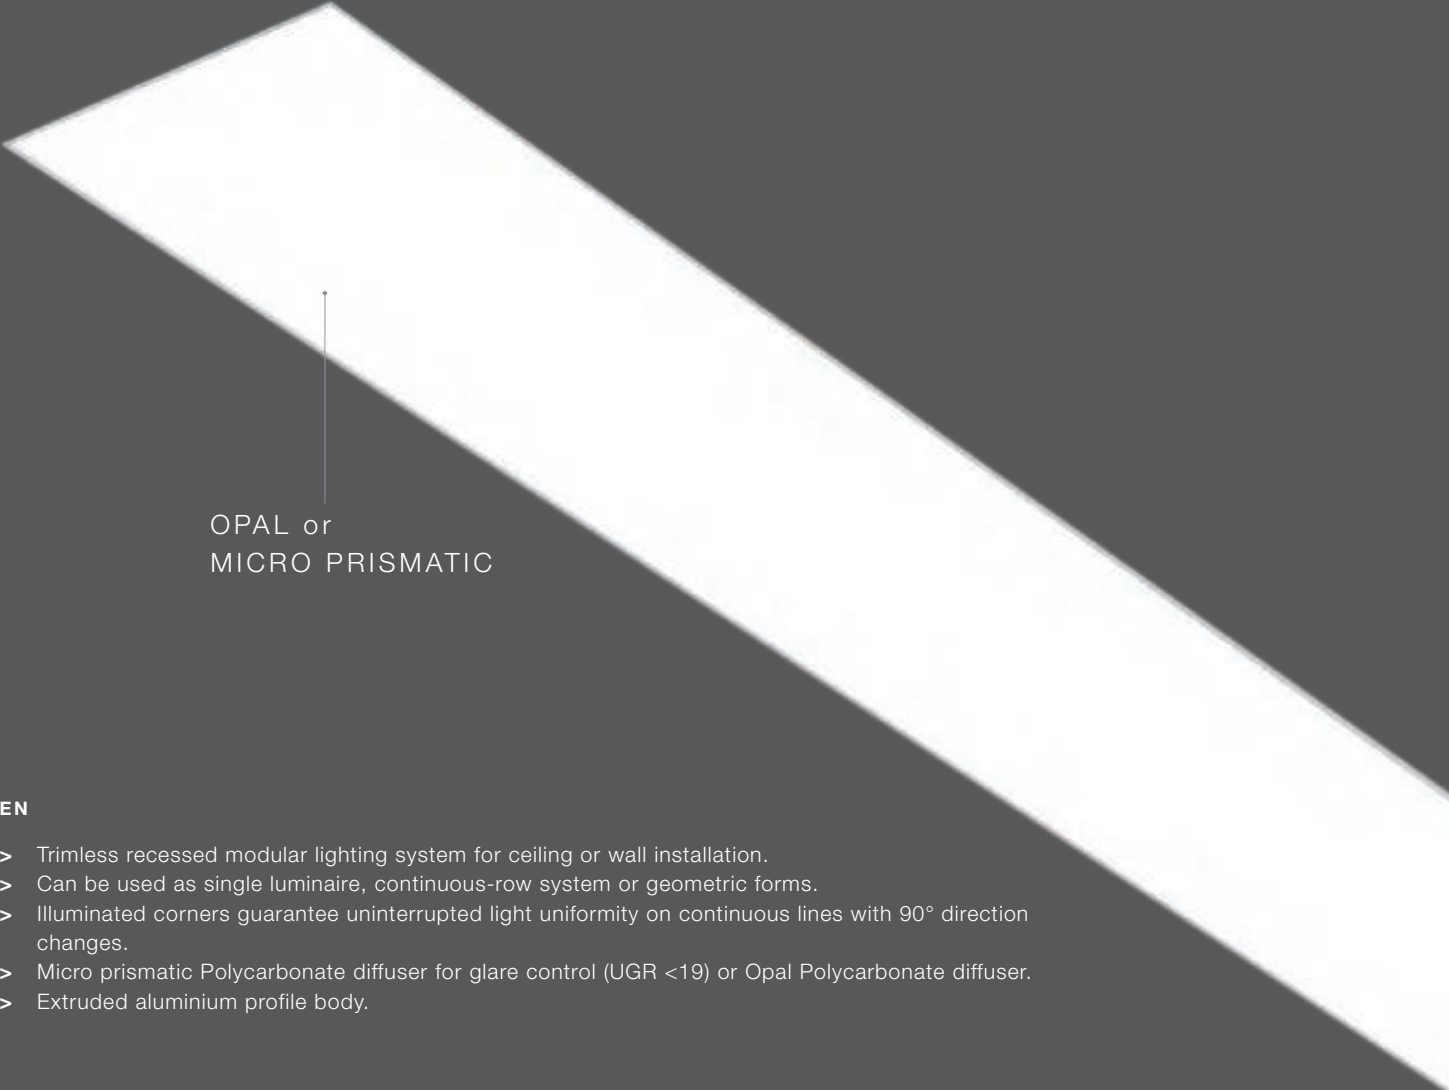

OPAL or
MICRO PRISMATIC

EN

- > Trimless recessed modular lighting system for ceiling or wall installation.
- > Can be used as single luminaire, continuous-row system or geometric forms.
- > Illuminated corners guarantee uninterrupted light uniformity on continuous lines with 90° direction changes.
- > Micro prismatic Polycarbonate diffuser for glare control (UGR <19) or Opal Polycarbonate diffuser.
- > Extruded aluminium profile body.

FR

- > Système modulaire d'éclairage pour application encastrée sans cadre (trimless).
- > Peut être utilisé comme luminaire individuel, système en ligne continue ou formes géométriques.
- > Les angles éclairés assurent une lumière uniforme sans interruption dans les lignes continues avec des changements de direction à 90°.
- > Diffuseur en Polycarbonate Microprismatique pour contrôle de l'éblouissement (UGR <19) ou diffuseur Polycarbonate Opale.
- > Corps en profil d'aluminium extrudé.

QUICK INFO

GENERAL

Trimless
IP43 (Optic)
IP20
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 171 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS

GENERAL (Individual Luminaire)

IP44 (Optic)
Class II

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light



OMEGA XS TRIMLESS

OPAL DIFFUSER

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
845	1888	19	33.42.85.30.000	33.42.85.30.010
	3776	38	33.42.85.30.005	33.42.85.30.015
1126	2517	25	33.42.85.30.001	33.42.85.30.011
	5035	50	33.42.85.30.006	33.42.85.30.016
1407	3146	31	33.42.85.30.002	33.42.85.30.012
	6293	63	33.42.85.30.007	33.42.85.30.017
2250	5034	50	33.42.85.30.003	33.42.85.30.013
	10070	101	33.42.85.30.008	33.42.85.30.018
2812	6293	63	33.42.85.30.004	33.42.85.30.014
	12587	126	33.42.85.30.009	33.42.85.30.019
Corner 625x625	2517	25	33.42.85.30.500	33.42.85.30.504
	5035	50	33.42.85.30.501	33.42.85.30.505
4000 K				
845	1976	19	33.42.85.30.020	33.42.85.30.030
	3951	38	33.42.85.30.025	33.42.85.30.035
1126	2634	25	33.42.85.30.021	33.42.85.30.031
	5268	50	33.42.85.30.026	33.42.85.30.036
1407	3293	31	33.42.85.30.022	33.42.85.30.032
	6585	63	33.42.85.30.027	33.42.85.30.037
2250	5268	50	33.42.85.30.023	33.42.85.30.033
	10536	101	33.42.85.30.028	33.42.85.30.038
2812	6586	63	33.42.85.30.024	33.42.85.30.034
	13170	126	33.42.85.30.029	33.42.85.30.039
Corner 625x625	2634	25	33.42.85.30.508	33.42.85.30.512
	5268	50	33.42.85.30.509	33.42.85.30.513

ON REQUEST (INDIVIDUAL LUMINAIRE)

- > IP44 (OPTIC);
- > CLASS II.



QUICK INFO

GENERAL

Trimless
IP43 (Optic)
IP20
IK08
850°C
Class I
Ta= -20°C +35°C

OPTIC

Micro Prismatic Polycarbonate
UGR <19

LED

Efficacy up to 171 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS

GENERAL (Individual Luminaire)

IP44 (Optic)
Class II

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth


EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

Micro Prismatic Diffuser - UGR<19




OMEGA XS TRIMLESS

MICRO PRISMATIC DIFFUSER - UGR <19

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
845	1422	19	33.42.85.30.040	33.42.85.30.050
	2843	38	33.42.85.30.045	33.42.85.30.055
1126	1895	25	33.42.85.30.041	33.42.85.30.051
	3791	50	33.42.85.30.046	33.42.85.30.056
1407	2369	31	33.42.85.30.042	33.42.85.30.052
	4739	63	33.42.85.30.047	33.42.85.30.057
2250	3790	50	33.42.85.30.043	33.42.85.30.053
	7583	101	33.42.85.30.048	33.42.85.30.058
2812	4739	63	33.42.85.30.044	33.42.85.30.054
	9478	126	33.42.85.30.049	33.42.85.30.059
Corner 625x625	1895	25	33.42.85.30.502	33.42.85.30.506
	3791	50	33.42.85.30.503	33.42.85.30.507
4000 K				
845	1488	19	33.42.85.30.060	33.42.85.30.070
	2975	38	33.42.85.30.065	33.42.85.30.075
1126	1983	25	33.42.85.30.061	33.42.85.30.071
	3967	50	33.42.85.30.066	33.42.85.30.076
1407	2480	31	33.42.85.30.062	33.42.85.30.072
	4959	63	33.42.85.30.067	33.42.85.30.077
2250	3967	50	33.42.85.30.063	33.42.85.30.073
	7934	101	33.42.85.30.068	33.42.85.30.078
2812	4959	63	33.42.85.30.064	33.42.85.30.074
	9917	126	33.42.85.30.069	33.42.85.30.079
Corner 625x625	1983	25	33.42.85.30.510	33.42.85.30.514
	3967	50	33.42.85.30.511	33.42.85.30.515


DESCRIPTION

- 1 > DRIVER
- 2 > LED BOARD
- 3 > LED COVER
- 4 > REFLECTOR
- 5 > DIFFUSER



OMEGA XS

TRIMLESS

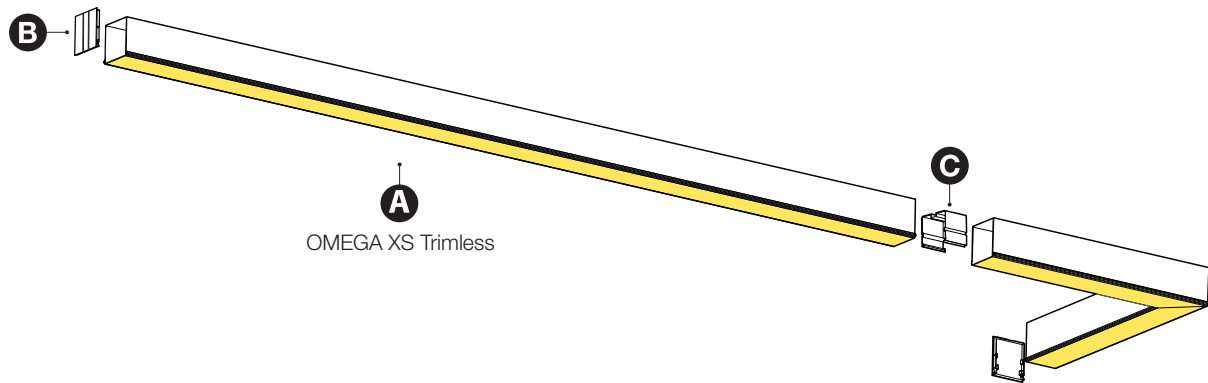

COMPONENTS



B END CAP (1pc)

COD

Matt White

35.42.85.00.001



C LINEAR COUPLER (1pc)

COD

Coupler

35.42.85.00.000

OPTIONS



EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF

COD

EM 1H 3W

35.00.003.01.23*

EM 3H 3W

35.00.003.01.24**

DALI

COD

EM 1H 5,4W DALI

35.00.004.01.54*

EM 3H 5,4W DALI

35.00.004.01.55**


* Applies to lengths equal to or greater than 1126 mm. ** Applies to lengths equal to or greater than 1407 mm.
> On request – External Emergency. Box dimensions: 45x120x360 mm.

OMEGA
RECESSED





OMEGA DIRECT LIGHT RECESSED

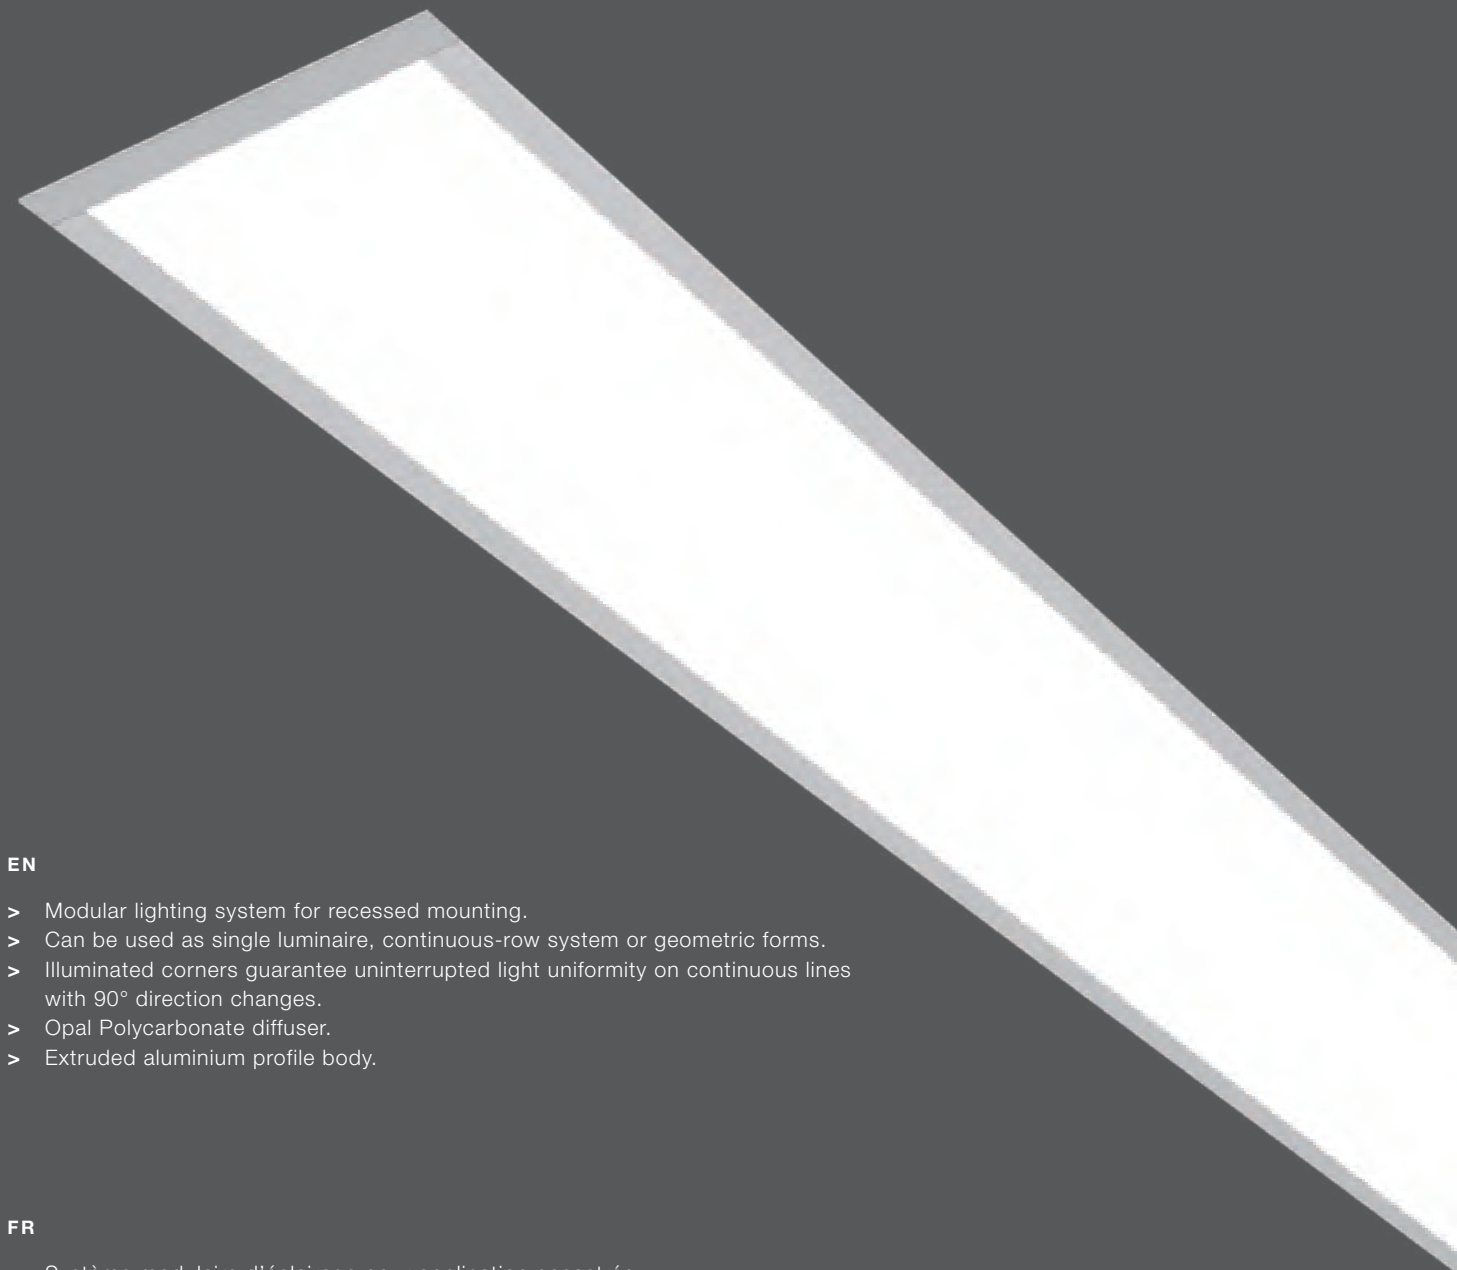

EN

- > Modular lighting system for recessed mounting.
- > Can be used as single luminaire, continuous-row system or geometric forms.
- > Illuminated corners guarantee uninterrupted light uniformity on continuous lines with 90° direction changes.
- > Opal Polycarbonate diffuser.
- > Extruded aluminium profile body.

FR

- > Système modulaire d'éclairage pour application encastrée.
- > Peut être utilisé comme luminaire individuel, système en ligne continue ou formes géométriques.
- > Les angles éclairés assurent une lumière uniforme sans interruption dans les lignes continues avec des changements de direction à 90°.
- > Diffuseur en Polycarbonate Opale.
- > Corps en profil d'aluminium extrudé.

QUICK INFO

GENERAL

Recessed
IP43 (Optic)
IP20
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 179 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
Matt Anodized

OMEGA RECESSED

OPAL DIFFUSER

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
856	3503	39	33.42.95.20.000	33.42.95.20.010
1137	4669	52	33.42.95.20.001	33.42.95.20.011
1418	5837	64	33.42.95.20.002	33.42.95.20.012
2261	9339	103	33.42.95.20.003	33.42.95.20.013
2823	11675	129	33.42.95.20.004	33.42.95.20.014
Corner 632x632	4669	52	33.42.95.20.501	33.42.95.20.503
4000 K				
856	3666	39	33.42.95.20.020	33.42.95.20.030
1137	4888	52	33.42.95.20.021	33.42.95.20.031
1418	6110	64	33.42.95.20.022	33.42.95.20.032
2261	9776	103	33.42.95.20.023	33.42.95.20.033
2823	12219	129	33.42.95.20.024	33.42.95.20.034
Corner 632x632	4888	52	33.42.95.20.505	33.42.95.20.507

MATT ANODIZED FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
856	3503	39	33.42.95.20.005	33.42.95.20.015
1137	4669	52	33.42.95.20.006	33.42.95.20.016
1418	5837	64	33.42.95.20.007	33.42.95.20.017
2261	9339	103	33.42.95.20.008	33.42.95.20.018
2823	11675	129	33.42.95.20.009	33.42.95.20.019
Corner 632x632	4669	52	33.42.95.20.500	33.42.95.20.502
4000 K				
856	3666	39	33.42.95.20.025	33.42.95.20.035
1137	4888	52	33.42.95.20.026	33.42.95.20.036
1418	6110	64	33.42.95.20.027	33.42.95.20.037
2261	9776	103	33.42.95.20.028	33.42.95.20.038
2823	12219	129	33.42.95.20.029	33.42.95.20.039
Corner 632x632	4888	52	33.42.95.20.504	33.42.95.20.506

OPTIONS

GENERAL (Individual Luminaire)

IP44 (Optic)
Class II

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING


Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours


SENSORS

Motion
Ambient Light
Motion & Ambient Light




ON REQUEST (INDIVIDUAL LUMINAIRE)

- > IP44 (OPTIC);
- > CLASS II.



OMEGA

RECESSED

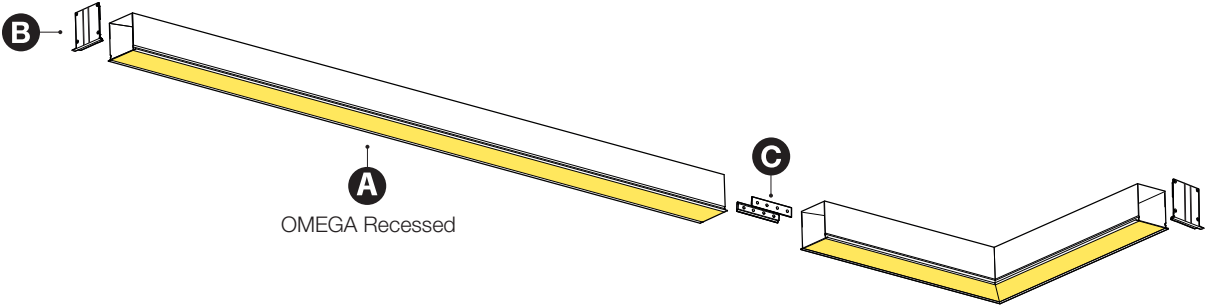

COMPONENTS



B	END CAP (1pc)	COD
	Matt White	35.42.95.20.000
	Matt Anodized Similar Painting	35.42.95.20.001



C	LINEAR COUPLER (2pcs)	COD
	Coupler	35.42.85.20.000

OPTIONS




EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF	COD
EM 1H 3W	35.00.003.01.23*
EM 3H 3W	35.00.003.01.24**
DALI	COD
EM 1H 5,4W DALI	35.00.004.01.54*
EM 3H 5,4W DALI	35.00.004.01.55**

* Applies to lengths equal to or greater than 1418 mm. ** Applies to lengths equal to or greater than 2823 mm.
> On request – External Emergency. Box dimensions: 45x120x360 mm.

DESCRIPTION

- 1 > DRIVER
- 2 > LED BOARD
- 3 > REFLECTOR
- 4 > DIFFUSER

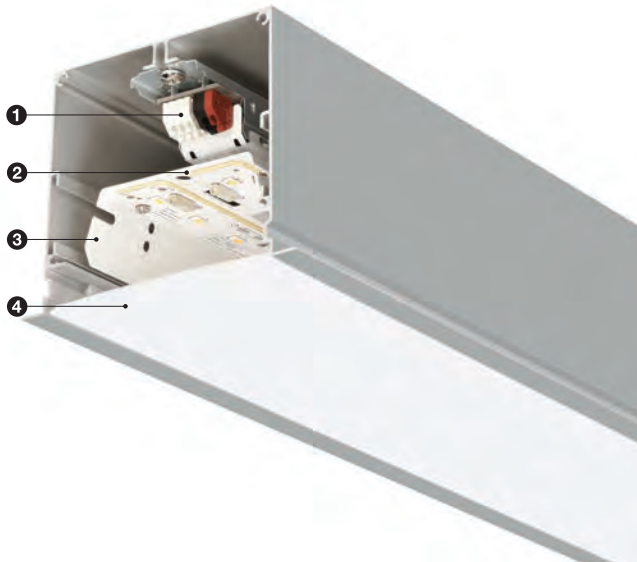



CARDAN SUSPENDED





> **CARDAN SUSPENDED** - BESPOKE SOLUTION

CARDAN

SUSPENDED



EN

- > Two axis directional spotlights.
- > Pivoting mechanism allowing 30° tilt in two axes.
- > Suitable for down lighting and accent lighting in interior spaces.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Faceted reflector with three different beam angles: 14°, 24° or 34°.
- > Main structure in matt anodized aluminium.

FR

- > Luminaire composée par projecteurs orientables en deux axes.
- > Mécanisme de pivotement qui permet l'inclinaison en 30° en deux axes.
- > Idéal pour l'éclairage général et d'accentuation dans les espaces intérieurs.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Réflecteur à facettes avec trois options d'angle de rayonnement: 14°, 24° ou 34°.
- > Corps en aluminium finition anodisé mat.

QUICK INFO

GENERAL

Suspended
IP20
650°C
Class I
Ta= -20°C +35°C

LED

Efficacy up to 147 lm/W
3000 K, 4000 K
CRI >85
Lifetime 50 000 H
L90/B10 @TC=85°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Matt Anodized

OPTIONS

LED

2700 K
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

CARDAN DUO SUSPENDED



MATT ANODIZED FINISHING

Beam Angle (°)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
14°	3168	27	33.92.003.08.90	33.92.004.08.03
	4386	40	33.92.003.08.93	33.92.004.08.12
24°	3163	27	33.92.003.08.91	33.92.004.08.04
	4379	40	33.92.004.08.01	33.92.004.08.13
34°	3169	27	33.92.003.08.92	33.92.004.08.05
	4381	40	33.92.004.08.02	33.92.004.08.14
4000 K				
14°	3273	27	33.92.004.08.15	33.92.004.08.29
	4528	40	33.92.004.08.26	33.92.004.08.38
24°	3268	27	33.92.004.08.16	33.92.004.08.36
	4522	40	33.92.004.08.27	33.92.004.08.39
34°	3271	27	33.92.004.08.17	33.92.004.08.37
	4532	40	33.92.004.08.28	33.92.004.08.40

CARDAN TETRA SUSPENDED

MATT ANODIZED FINISHING

Beam Angle (°)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
14°	6257	53	33.92.004.08.41	33.92.004.08.56
	8662	80	33.92.004.08.48	33.92.004.08.67
24°	6301	53	33.92.004.08.46	33.92.004.08.57
	8723	80	33.92.004.08.49	33.92.004.08.72
34°	6269	53	33.92.004.08.47	33.92.004.08.64
	8668	80	33.92.004.08.55	33.92.004.08.73
4000 K				
14°	6464	53	33.92.004.08.74	33.92.009.08.01
	8944	80	33.92.008.08.98	33.92.009.08.04
24°	6509	53	33.92.004.08.75	33.92.009.08.02
	9007	80	33.92.008.08.99	33.92.009.08.05
34°	6473	53	33.92.008.08.97	33.92.009.08.03
	8966	80	33.92.009.08.00	33.92.009.08.06

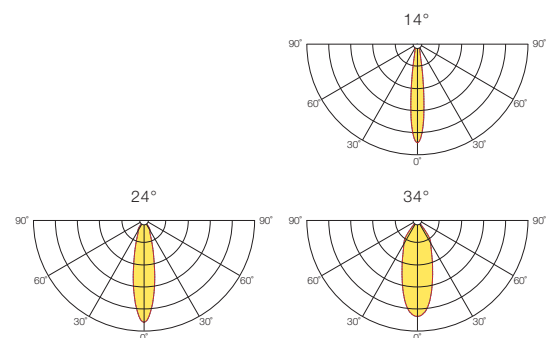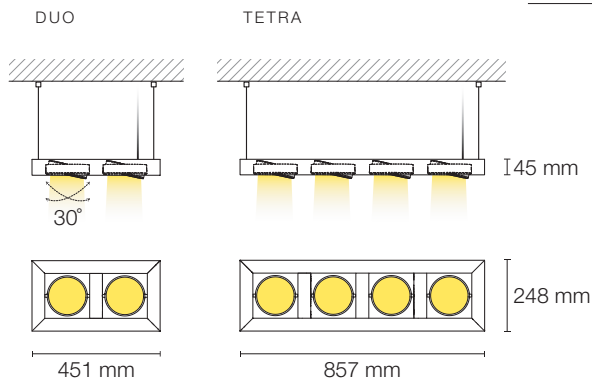

CARDAN

SUSPENDED

COMPONENTS



SUSPENSION SYSTEM (4pcs)

TYPE	1m	3m	5m
Matt White + Stainless Steel Cable	35.92.003.01.64	35.92.003.01.65	35.92.003.01.66



SURFACE CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø62x36 mm	35.42.001.01.80	35.42.001.01.88	35.42.001.01.96
DALI	Ø103x36 mm	35.42.001.01.82	35.42.001.01.90	35.42.001.01.98



RECESSED CEILING CUP (1pc)

MATT WHITE	DIMENSION	1m	3m	5m
ON/OFF	Ø80 mm	35.42.001.01.84	35.42.001.01.92	35.42.002.01.00
DALI	Ø80 mm	35.42.001.01.86	35.42.001.01.94	35.42.002.01.02



CARDAN

SURFACE




EN

- > Two axis directional spotlights for surface mounting.
- > Pivoting mechanism allowing 30° tilt in two axes.
- > Faceted reflector with three different beam angles: 14°, 24° or 34°.
- > Main structure from 4 mm thick aluminium plate finished in grey with white or black inner housing.


FR

- > Luminaire composée par projecteurs orientables en deux axes pour application apparente.
- > Mécanisme de pivotement qui permet l'inclinaison en 30° en deux axes.
- > Réflecteur à facettes avec trois options d'angle de rayonnement: 14°, 24° ou 34°.
- > Corps en tôle d'aluminium de 4 mm d'épaisseur finition gris et boîte intérieure en blanc ou noir.

CARDAN SURFACE SINGLE



CARDAN SURFACE DUO



QUICK INFO

GENERAL

Surface
IP20
650°C
Class I
Ta= -20°C +35°C

LED

Efficacy up to 147 lm/W
3000 K, 4000 K
CRI >85
Lifetime 50 000 H
L90/B10 @TC=85°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

Outer Housing
RAL 9006 Grey
Inner Housing
RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light



CARDAN DUO SURFACE

MATT WHITE FINISHING

Beam Angle (°)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
14°	3159	27	33.92.010.08.24	33.92.010.08.36
	4374	40	33.92.010.08.27	33.92.010.08.39
24°	3147	27	33.92.010.08.25	33.92.010.08.37
	4356	40	33.92.010.08.28	33.92.010.08.40
34°	3112	27	33.92.010.08.26	33.92.010.08.38
	4304	40	33.92.010.08.29	33.92.010.08.41
4000 K				
14°	3264	27	33.92.010.08.48	33.92.010.08.60
	4516	40	33.92.010.08.51	33.92.010.08.63
24°	3250	27	33.92.010.08.49	33.92.010.08.61
	4498	40	33.92.010.08.52	33.92.010.08.64
34°	3214	27	33.92.010.08.50	33.92.010.08.62
	4451	40	33.92.010.08.53	33.92.010.08.65

MATT BLACK FINISHING

Beam Angle (°)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
14°	3159	27	33.92.010.08.30	33.92.010.08.42
	4374	40	33.92.010.08.33	33.92.010.08.45
24°	3147	27	33.92.010.08.31	33.92.010.08.43
	4356	40	33.92.010.08.34	33.92.010.08.46
34°	3112	27	33.92.010.08.32	33.92.010.08.44
	4304	40	33.92.010.08.35	33.92.010.08.47
4000 K				
14°	3264	27	33.92.010.08.54	33.92.010.08.66
	4516	40	33.92.010.08.57	33.92.010.08.69
24°	3250	27	33.92.010.08.55	33.92.010.08.67
	4498	40	33.92.010.08.58	33.92.010.08.70
34°	3214	27	33.92.010.08.56	33.92.010.08.68
	4451	40	33.92.010.08.59	33.92.010.08.71

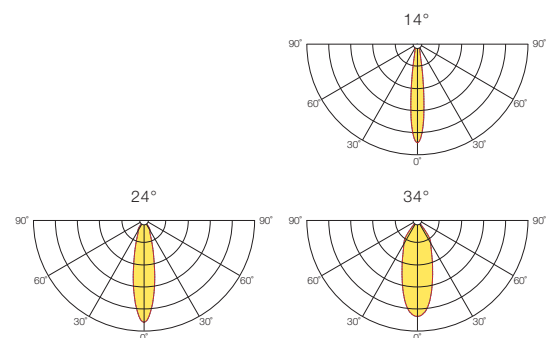

QUICK INFO

GENERAL

Surface
IP20
650°C
Class I
Ta= -20°C +35°C

LED

Efficacy up to 147 lm/W
3000 K, 4000 K
CRI >85
Lifetime 50 000 H
L90/B10 @TC=85°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF

FINISHING

Outer Housing
RAL 9006 Grey
Inner Housing
RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K
CRI >90

ELECTRICAL SYSTEM

DALI, DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light



CARDAN SINGLE SURFACE

MATT WHITE FINISHING

Beam Angle (°)	Output (lm)	System (W)	ON/OFF
3000 K			
14°	1460	13	33.92.010.08.00
	2021	20	33.92.010.08.03
24°	1478	13	33.92.010.08.01
	2046	20	33.92.010.08.04
34°	1471	13	33.92.010.08.02
	2034	20	33.92.010.08.05
4000 K			
14°	1508	13	33.92.010.08.12
	2086	20	33.92.010.08.15
24°	1527	13	33.92.010.08.13
	2112	20	33.92.010.08.16
34°	1519	13	33.92.010.08.14
	2103	20	33.92.010.08.17

MATT BLACK FINISHING

Beam Angle (°)	Output (lm)	System (W)	ON/OFF
3000 K			
14°	1460	13	33.92.010.08.06
	2021	20	33.92.010.08.09
24°	1478	13	33.92.010.08.07
	2046	20	33.92.010.08.10
34°	1471	13	33.92.010.08.08
	2034	20	33.92.010.08.11
4000 K			
14°	1508	13	33.92.010.08.18
	2086	20	33.92.010.08.21
24°	1527	13	33.92.010.08.19
	2112	20	33.92.010.08.22
34°	1519	13	33.92.010.08.20
	2103	20	33.92.010.08.23

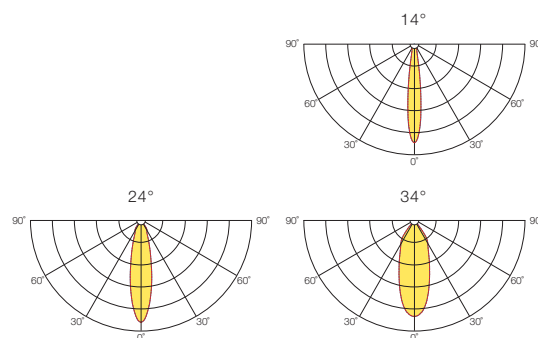



CARDAN

RECESSED




EN

- > Two axis directional LED spotlights for ceiling recessed mounting.
- > Single and Duo versions suitable for down lighting and accent lighting in interior spaces.
- > Pivoting mechanism allowing 30° tilt in two axes.
- > Faceted reflector with three different beam angles: 14°, 24° or 34°.
- > Epoxy-polyester powder coated body and frame.


FR

- > Luminaire composée par projecteurs LED orientables en deux axes pour application encastrée.
- > En versions Single et Duo idéales pour l'éclairage général et d'accentuation dans les espaces intérieurs.
- > Mécanisme de pivotement qui permet l'inclinaison en 30° en deux axes.
- > Réflecteur à facettes avec trois options d'angle de rayonnement: 14°, 24° ou 34°.
- > Corps et cadre laqués époxy-polyester.

CARDAN RECESSED SINGLE



CARDAN RECESSED DUO



QUICK INFO

GENERAL

Recessed
IP20
650°C
Class I
Ta= -20°C +35°C

LED

Efficacy up to 147 lm/W
3000 K, 4000 K
CRI >85
Lifetime 50 000 H
L90/B10 @TC=85°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light



CARDAN DUO RECESSED

MATT WHITE FINISHING

Beam Angle (°)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
14°	3184	27	33.92.008.08.48	33.92.008.08.60
	4408	40	33.92.008.08.51	33.92.008.08.63
24°	3165	27	33.92.008.08.49	33.92.008.08.61
	4382	40	33.92.008.08.52	33.92.008.08.64
34°	3156	27	33.92.008.08.50	33.92.008.08.62
	4365	40	33.92.008.08.53	33.92.008.08.65
4000 K				
14°	3289	27	33.92.008.08.72	33.92.008.08.84
	4552	40	33.92.008.08.75	33.92.008.08.87
24°	3270	27	33.92.008.08.73	33.92.008.08.85
	4524	40	33.92.008.08.76	33.92.008.08.88
34°	3259	27	33.92.008.08.74	33.92.008.08.86
	4515	40	33.92.008.08.77	33.92.008.08.89

MATT BLACK FINISHING

Beam Angle (°)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
14°	3184	27	33.92.008.08.54	33.92.008.08.66
	4408	40	33.92.008.08.57	33.92.008.08.69
24°	3165	27	33.92.008.08.55	33.92.008.08.67
	4382	40	33.92.008.08.58	33.92.008.08.70
34°	3156	27	33.92.008.08.56	33.92.008.08.68
	4365	40	33.92.008.08.59	33.92.008.08.71
4000 K				
14°	3289	27	33.92.008.08.78	33.92.008.08.90
	4552	40	33.92.008.08.81	33.92.008.08.93
24°	3270	27	33.92.008.08.79	33.92.008.08.91
	4524	40	33.92.008.08.82	33.92.008.08.94
34°	3259	27	33.92.008.08.80	33.92.008.08.92
	4515	40	33.92.008.08.83	33.92.008.08.95

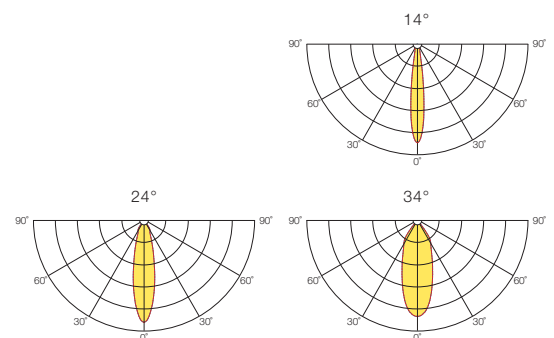

QUICK INFO

GENERAL

Recessed
IP20
650°C
Class I
Ta= -20°C +35°C

LED

Efficacy up to 147 lm/W
3000 K, 4000 K
CRI >85
Lifetime 50 000 H
L90/B10 @TC=85°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

CARDAN SINGLE RECESSED



MATT WHITE FINISHING

Beam Angle (°)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
14°	1460	13	33.92.008.08.00	33.92.008.08.12
	2021	20	33.92.008.08.03	33.92.008.08.15
24°	1478	13	33.92.008.08.01	33.92.008.08.13
	2046	20	33.92.008.08.04	33.92.008.08.16
34°	1471	13	33.92.008.08.02	33.92.008.08.14
	2034	20	33.92.008.08.05	33.92.008.08.17
4000 K				
14°	1508	13	33.92.008.08.24	33.92.008.08.36
	2086	20	33.92.008.08.27	33.92.008.08.39
24°	1527	13	33.92.008.08.25	33.92.008.08.37
	2112	20	33.92.008.08.28	33.92.008.08.40
34°	1519	13	33.92.008.08.26	33.92.008.08.38
	2103	20	33.92.008.08.29	33.92.008.08.41

MATT BLACK FINISHING

Beam Angle (°)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
14°	1460	13	33.92.008.08.06	33.92.008.08.18
	2021	20	33.92.008.08.09	33.92.008.08.21
24°	1478	13	33.92.008.08.07	33.92.008.08.19
	2046	20	33.92.008.08.10	33.92.008.08.22
34°	1471	13	33.92.008.08.08	33.92.008.08.20
	2034	20	33.92.008.08.11	33.92.008.08.23
4000 K				
14°	1508	13	33.92.008.08.30	33.92.008.08.42
	2086	20	33.92.008.08.33	33.92.008.08.45
24°	1527	13	33.92.008.08.31	33.92.008.08.43
	2112	20	33.92.008.08.34	33.92.008.08.46
34°	1519	13	33.92.008.08.32	33.92.008.08.44
	2103	20	33.92.008.08.35	33.92.008.08.47

SINGLE

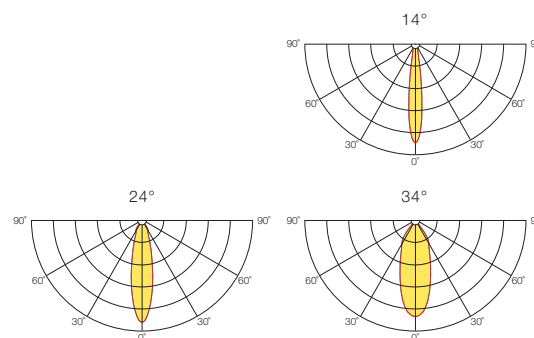



ERUS
SUSPENDED





> ERUS 90 SUSPENDED

ERUS 25

SUSPENDED



EN

- > Decorative pendant LED luminaire.
- > Tubular shape with 25 mm diameter available in various lengths.
- > Can be used as single luminaire or in clusters of several units powered from a single Driver.
- > The integrated lens optics allow beam angles of 30° or 45°.
- > External class II constant current Driver.
- > Epoxy-polyester powder coated aluminium tube.

FR

- > Suspension LED en aluminium.
- > Forme tubulaire diamètre 25 mm disponible en plusieurs longueurs.
- > Peut être utilisé comme luminaire individuel ou en groupes de luminaires alimentées à partir d'un seul Driver.
- > L'optique de lentille intégrée permet des angles d'ouverture de 30° ou 45°.
- > Driver externe à courant constant et classe de protection II.
- > Tube en aluminium avec revêtement époxy-polyester.

QUICK INFO

GENERAL

Suspended
IP20
650°C
Class III
Ta= -20°C +35°C

OPTIC

PMMA Lens

LED

Efficacy up to 129 lm/W
2700 K, 3000 K, 4000 K
CRI >90
Lifetime 65 000 H
L80/B10 @Tc=75°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

5000 K, 6500 K

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

Other Colours



SENSORS

Motion

ERUS 25 SUSPENDED

Beam Angle (°)	h (mm)	Output (lm)	LED Power (W)	MATT WHITE	MATT BLACK
2700 K					
30°	350	326	5	33.18.005.08.00	33.18.005.08.18
	450	326	5	33.18.005.08.06	33.18.005.08.24
	550	326	5	33.18.005.08.12	33.18.005.08.30
45°	350	343	5	33.18.005.08.01	33.18.005.08.19
	450	343	5	33.18.005.08.07	33.18.005.08.25
	550	343	5	33.18.005.08.13	33.18.005.08.31
3000 K					
30°	350	352	5	33.18.005.08.02	33.18.005.08.20
	450	352	5	33.18.005.08.08	33.18.005.08.26
	550	352	5	33.18.005.08.14	33.18.005.08.32
45°	350	370	5	33.18.005.08.03	33.18.005.08.21
	450	370	5	33.18.005.08.09	33.18.005.08.27
	550	370	5	33.18.005.08.15	33.18.005.08.33
4000 K					
30°	350	379	5	33.18.005.08.04	33.18.005.08.22
	450	379	5	33.18.005.08.10	33.18.005.08.28
	550	379	5	33.18.005.08.16	33.18.005.08.34
45°	350	398	5	33.18.005.08.05	33.18.005.08.23
	450	398	5	33.18.005.08.11	33.18.005.08.29
	550	398	5	33.18.005.08.17	33.18.005.08.35

SCALE
1:1

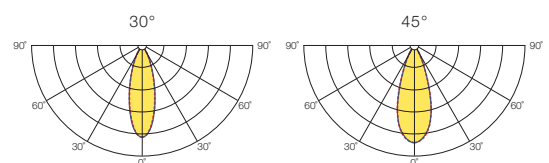

ERUS 25

SUSPENDED

COMPONENTS



RECESSED CEILING CUP (1pc)

FINISHING	DIMENSION	1m	3m	5m
Matt White	Ø80 mm	35.18.001.01.83	35.18.001.01.84	35.18.001.01.85
Matt Black	Ø80 mm	35.18.001.01.86	35.18.001.01.87	35.18.001.01.88



RECESSED CEILING CUP (1pc)

FINISHING	DIMENSION	1m	3m	5m
Matt White	Ø20 mm	35.18.001.01.89	35.18.001.01.90	35.18.001.01.91
Matt Black	Ø20 mm	35.18.001.01.92	35.18.001.01.93	35.18.001.01.94



CLASS II

DRIVER - EXTERNAL

ON/OFF	DIMENSION	COD
Power Supply 2-7W IP20	23x32x76 mm	35.92.00.000024
Power Supply 8-18W IP20	23x38x125 mm	35.06.60.000661
DALI	DIMENSION	COD
Power Supply 2-17W IP20	22x52x108 mm	35.92.00.000026
Power Supply 17-22W IP20	31x70x200 mm	35.92.00.000032

> External Driver to be housed nearby.



> **ERUS 25** SUSPENDED

ERUS 55

SUSPENDED



EN

- > Decorative pendant tube luminaire.
- > Tubular shape with 55 mm diameter available in various lengths.
- > COB (Chip On Board) versions with integrated lens optics allowing beam angles of 24° or 36°.
- > Built-in power supply.
- > GU10 lamp holder versions also available.
- > Suspended luminaire with choice of recessed or surface mounted ceiling cup.
- > Epoxy-polyester powder coated aluminium tube.

FR

- > Suspension décorative en aluminium.
- > Forme tubulaire diamètre 55 mm disponible en plusieurs longueurs.
- > Versions COB (Chip On Board) à lentille intégrée permettent des angles d'ouverture de 24° ou 36°.
- > Source d'alimentation intégrée.
- > Versions pour lampes culot GU10 aussi disponibles.
- > Application suspendue avec choix de patère saillie ou encastrée.
- > Tube en aluminium avec revêtement époxy-polyester.

QUICK INFO

GENERAL

Suspended
IP20
650°C
Class I
Ta= -20°C +35°C

OPTIC

Polycarbonate Reflector
PMMA Diffuser

LED

Efficacy up to 104 lm/W
2700 K, 3000 K, 4000 K
CRI >92
Lifetime 50 000 H
L90/B10 @Tc=75°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White

OPTIONS

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

Other Colours

SENSORS



Motion

ERUS 55 SUSPENDED

MATT WHITE FINISHING

Beam Angle (°)	h (mm)	Output (lm)	System (W)	ON/OFF	DALI
2700 K					
24°	350	1140	14	33.18.012.08.00	33.18.012.08.36
	450	1140	14	33.18.012.08.12	33.18.012.08.48
	550	1140	14	33.18.012.08.24	33.18.012.08.60
36°	350	1140	14	33.18.012.08.01	33.18.012.08.37
	450	1140	14	33.18.012.08.13	33.18.012.08.49
	550	1140	14	33.18.012.08.25	33.18.012.08.61
3000 K					
24°	350	1170	14	33.18.012.08.02	33.18.012.08.38
	450	1170	14	33.18.012.08.14	33.18.012.08.50
	550	1170	14	33.18.012.08.26	33.18.012.08.62
36°	350	1170	14	33.18.012.08.03	33.18.012.08.39
	450	1170	14	33.18.012.08.15	33.18.012.08.51
	550	1170	14	33.18.012.08.27	33.18.012.08.63
4000 K					
24°	350	1270	14	33.18.012.08.04	33.18.012.08.40
	450	1270	14	33.18.012.08.16	33.18.012.08.52
	550	1270	14	33.18.012.08.28	33.18.012.08.64
36°	350	1270	14	33.18.012.08.05	33.18.012.08.41
	450	1270	14	33.18.012.08.17	33.18.012.08.53
	550	1270	14	33.18.012.08.29	33.18.012.08.65

> Components Required - page 310.

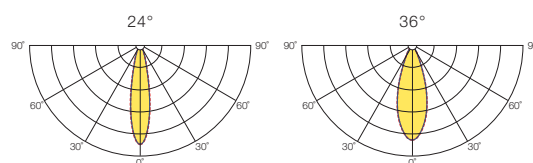

QUICK INFO

GENERAL

Suspended
IP20
650°C
Class I
Ta= -20°C +35°C

OPTIC

Polycarbonate Reflector
PMMA Diffuser

LED

Efficacy up to 104 lm/W
2700 K, 3000 K, 4000 K
CRI >92
Lifetime 50 000 H
L90/B10 @Tc=75°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9005 Matt Black

OPTIONS

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

SENSORS


Motion

ERUS 55 SUSPENDED

MATT BLACK FINISHING

Beam Angle (°)	h (mm)	Output (lm)	System (W)	ON/OFF	DALI
2700 K					
24°	350	1140	14	33.18.012.08.06	33.18.012.08.42
	450	1140	14	33.18.012.08.18	33.18.012.08.54
	550	1140	14	33.18.012.08.30	33.18.012.08.66
36°	350	1140	14	33.18.012.08.07	33.18.012.08.43
	450	1140	14	33.18.012.08.19	33.18.012.08.55
	550	1140	14	33.18.012.08.31	33.18.012.08.67
3000 K					
24°	350	1170	14	33.18.012.08.08	33.18.012.08.44
	450	1170	14	33.18.012.08.20	33.18.012.08.56
	550	1170	14	33.18.012.08.32	33.18.012.08.68
36°	350	1170	14	33.18.012.08.09	33.18.012.08.45
	450	1170	14	33.18.012.08.21	33.18.012.08.57
	550	1170	14	33.18.012.08.33	33.18.012.08.69
4000 K					
24°	350	1270	14	33.18.012.08.10	33.18.012.08.46
	450	1270	14	33.18.012.08.22	33.18.012.08.58
	550	1270	14	33.18.012.08.34	33.18.012.08.70
36°	350	1270	14	33.18.012.08.11	33.18.012.08.47
	450	1270	14	33.18.012.08.23	33.18.012.08.59
	550	1270	14	33.18.012.08.35	33.18.012.08.71

> Components Required - page 310.

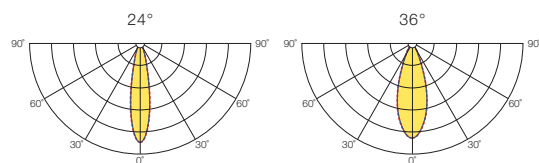

QUICK INFO

GENERAL

Suspended
IP20
650°C
Class I
Ta= -20°C +35°C

LAMP - NOT INCLUDED

GU10

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

SENSORS

Motion

ERUS 55 SUSPENDED - LAMP

MATT WHITE FINISHING

Type	h (mm)	Lamp Power (W)	ON/OFF
IP20			
	350	max. 50	33.18.050.01.77
GU10	450	max. 50	33.18.050.01.78
	550	max. 50	33.18.050.01.79

> Lamp not included.
> Components Required - page 000.

MATT BLACK FINISHING

Type	h (mm)	Lamp Power (W)	ON/OFF
IP20			
	350	max. 50	33.18.050.01.80
GU10	450	max. 50	33.18.050.01.81
	550	max. 50	33.18.050.01.82

> Lamp not included.
> Components Required - page 310.



RECOMMENDED LAMPS



OSRAM
PARATHOM
PAR 16
GU10
6,9 W



PHILIPS
Corepro
LEDspot
GU10
7 W



ERUS 55

SUSPENDED

COMPONENTS



SURFACE CEILING CUP (1pc)

ON/OFF	DIMENSION	1m	3m	5m
Matt White	Ø62x36 mm	35.18.001.01.41	35.18.001.01.42	35.18.001.01.43
Matt Black	Ø62x36 mm	35.18.001.01.44	35.18.001.01.45	35.18.001.01.46
DALI	DIMENSION	1m	3m	5m
Matt White	Ø62x36 mm	35.18.001.01.59	35.18.001.01.60	35.18.001.01.61
Matt Black	Ø62x36 mm	35.18.001.01.62	35.18.001.01.63	35.18.001.01.64




RECESSED CEILING CUP (1pc)

ON/OFF	DIMENSION	1m	3m	5m
Matt White	Ø80 mm	35.18.001.01.47	35.18.001.01.48	35.18.001.01.49
Matt Black	Ø80 mm	35.18.001.01.50	35.18.001.01.51	35.18.001.01.52
DALI	DIMENSION	1m	3m	5m
Matt White	Ø80 mm	35.18.001.01.65	35.18.001.01.66	35.18.001.01.67
Matt Black	Ø80 mm	35.18.001.01.68	35.18.001.01.69	35.18.001.01.70



RECESSED CEILING CUP (1pc)

ON/OFF	DIMENSION	1m	3m	5m
Matt White	Ø25 mm	35.18.001.01.53	35.18.001.01.54	35.18.001.01.55
Matt Black	Ø25 mm	35.18.001.01.56	35.18.001.01.57	35.18.001.01.58
DALI	DIMENSION	1m	3m	5m
Matt White	Ø25 mm	35.18.001.01.71	35.18.001.01.72	35.18.001.01.73
Matt Black	Ø25 mm	35.18.001.01.74	35.18.001.01.75	35.18.001.01.76

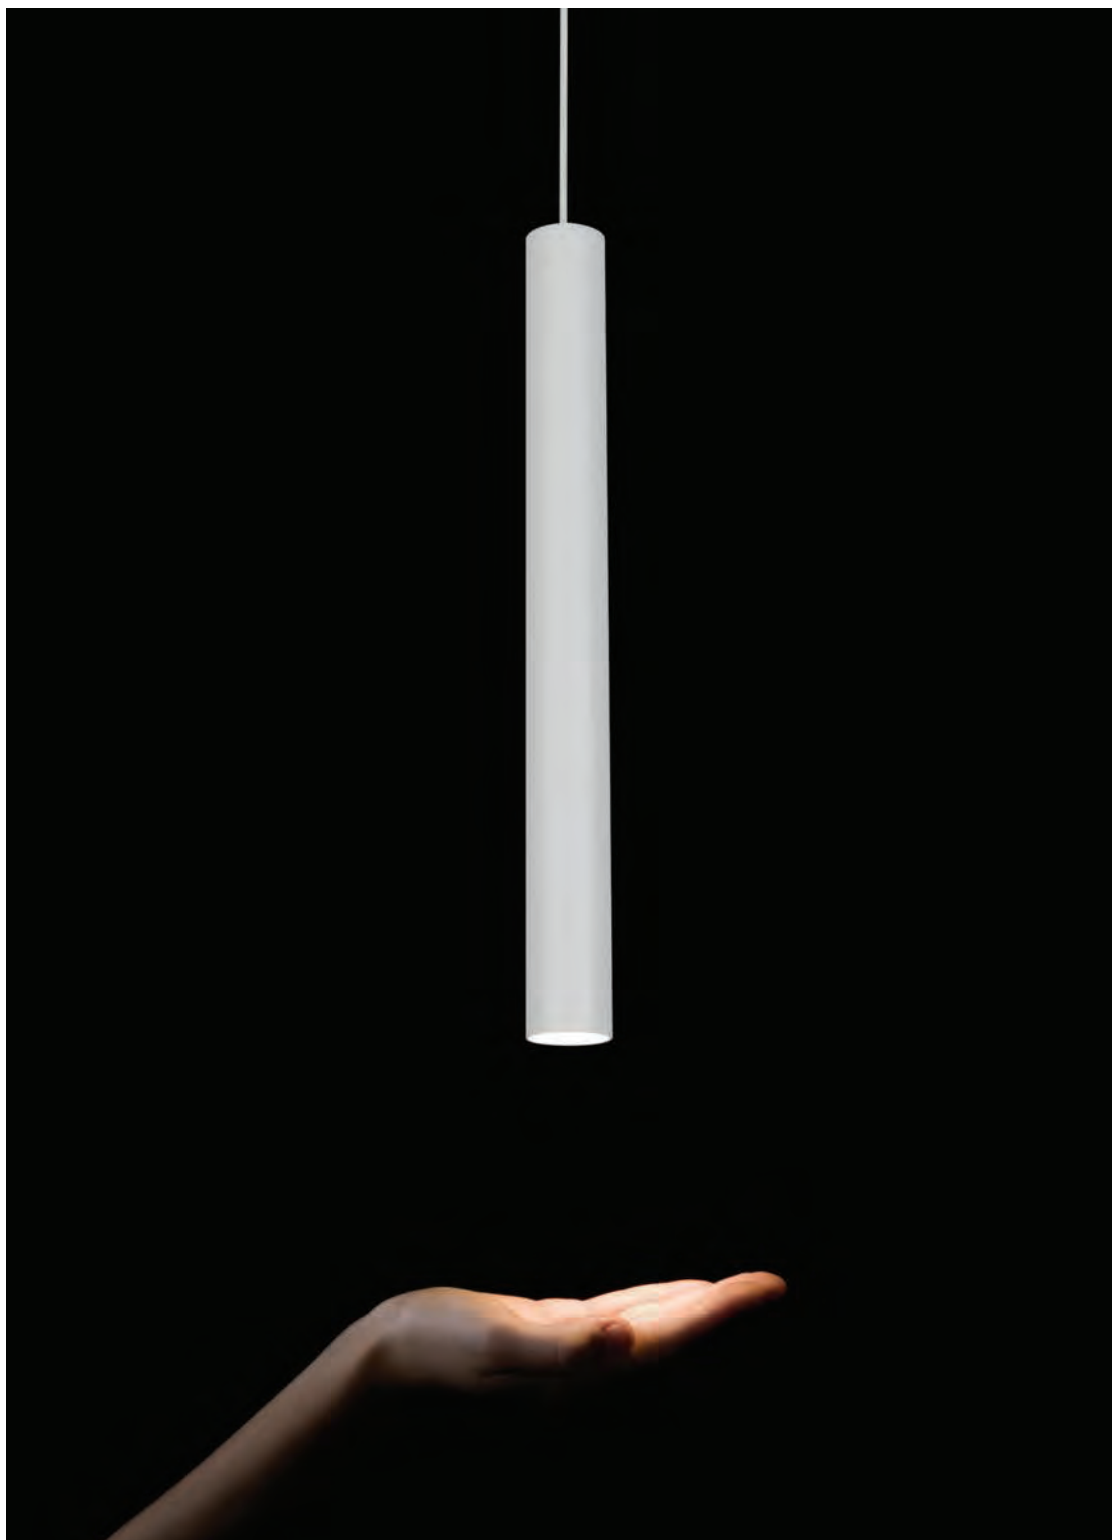

> **ERUS 55** SUSPENDED

ERUS 90 SUSPENDED



EN

- > Decorative pendant tube luminaire.
- > Tubular shape with 90 mm diameter available in various lengths.
- > Suspended luminaire with choice of recessed or surface mounted ceiling cup.
- > Epoxy-polyester powder coated aluminium tube.

FR

- > Suspension décorative en aluminium.
- > Forme tubulaire diamètre 90 mm disponible en plusieurs longueurs.
- > Application suspendue avec choix de patère saillie ou encastrée.
- > Tube en aluminium avec revêtement époxy-polyester.

QUICK INFO

GENERAL

Suspended
IP20
960°C
Class I
Ta= -20°C +35°C

LAMP - NOT INCLUDED
GU10

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

CONTROL SYSTEM

Bluetooth

FINISHING

Other Colours

SENSORS

Motion

ERUS 90 SUSPENDED - LAMP

Type	h (mm)	Lamp Power (W)	MATT WHITE	MATT BLACK
IP20	350	max. 50	33.18.050.01.71	33.18.050.01.72
	450	max. 50	33.18.050.01.73	33.18.050.01.74
	550	max. 50	33.18.050.01.75	33.18.050.01.76

> Lamp not included.

COMPONENTS

SURFACE CEILING CUP (1pc)

ON/OFF	1 m	3 m	5 m
Matt White Ø62x36 mm	35.18.001.01.41	35.18.001.01.42	35.18.001.01.43
Matt Black Ø62x36 mm	35.18.001.01.44	35.18.001.01.45	35.18.001.01.46

RECESSED CEILING CUP (1pc)

ON/OFF	1 m	3 m	5 m
Matt White Ø80 mm	35.18.001.01.47	35.18.001.01.48	35.18.001.01.49
Matt Black Ø80 mm	35.18.001.01.50	35.18.001.01.51	35.18.001.01.52

RECESSED CEILING CUP (1pc)

ON/OFF	1 m	3 m	5 m
Matt White Ø25 mm	35.18.001.01.53	35.18.001.01.54	35.18.001.01.55
Matt Black Ø25 mm	35.18.001.01.56	35.18.001.01.57	35.18.001.01.58



RECOMMENDED LAMPS



OSRAM
PARATHOM
PAR 16
GU10
6,9 W



PHILIPS
Corepro
LEDspot
GU10
7 W



ARES
SUSPENDED






> ARES LI SUSPENDED

ARES

DIRECT OR INDIRECT LIGHT

SUSPENDED

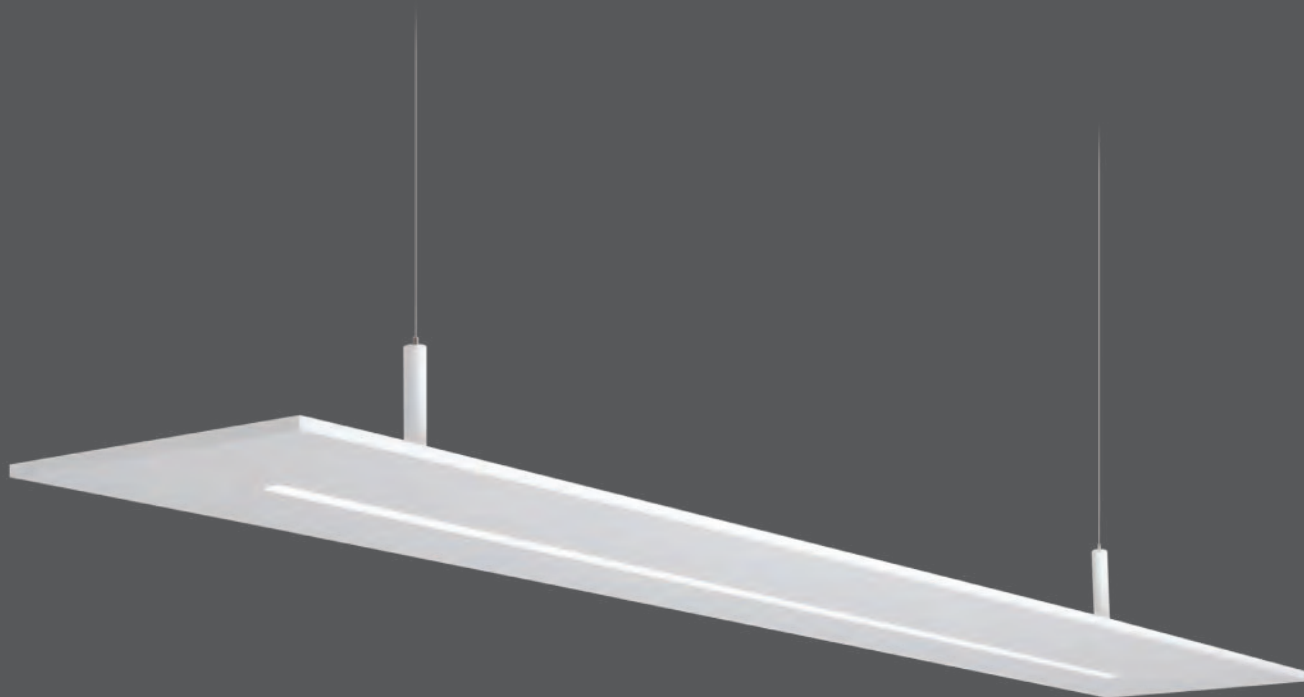

EN

- > Ultra low-profile design (only 10 mm) luminaire with direct and direct/indirect lighting versions.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Clear Polycarbonate direct light diffuser for optimised luminous flux.
- > Opal Polycarbonate indirect light component.
- > Epoxy-polyester powder coated aluminium body.

FR

- > Luminaire extrêmement plate (10 mm seulement) en versions d'éclairage direct et direct/indirect.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Diffuseur éclairage direct en Polycarbonate Transparent pour un flux lumineux accru.
- > Élément indirect en Polycarbonate Opale.
- > Corps en aluminium avec revêtement époxy-polyester.

QUICK INFO

GENERAL

Suspended
IP30
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate
Clear Polycarbonate

LED


Efficacy up to 173 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
DALI
Direct / Indirect - Simultaneous Control


FINISHING

RAL 9003 Matt White



ARES SUSPENDED - INDIRECT LIGHT OPAL DIFFUSER

c (mm)	Output (lm)	System (W)	DALI
3000 K			
1640	5983	50	33.06.40.001430
2200	8974	75	33.06.40.001431
4000 K			
1640	6262	50	33.06.40.001432
2200	9392	75	33.06.40.001433



ARES SUSPENDED - DIRECT & INDIRECT LIGHT OPAL + CLEAR DIFFUSER

c (mm)	Output (lm)	System (W)	DALI
3000 K			
1640	6440	64	33.06.40.001357
2200	9889	104	33.06.40.001358
4000 K			
1640	6746	64	33.06.40.001359
2200	10361	104	33.06.40.001360

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut
Direct / Indirect - Separate Control

CONTROL SYSTEM

Bluetooth

FINISHING

RAL 9005 Matt Black
Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

COMPONENTS

SUSPENSION SYSTEM (2pcs)



TYPE	1 m	3 m	5 m
Matt White	35.42.000.01.54	35.42.000.01.62	35.42.001.01.26

SURFACE CEILING CUP (1pc)

DALI	1 m	3 m	5 m
Matt White Ø62x36 mm	35.42.001.01.82	35.42.001.01.90	35.42.001.01.98

RECESSED CEILING CUP (1pc)

DALI	1 m	3 m	5 m
Matt White Ø80 mm	35.42.001.01.86	35.42.001.01.94	35.42.002.01.02

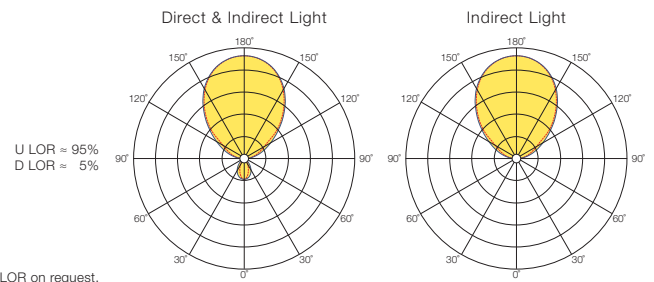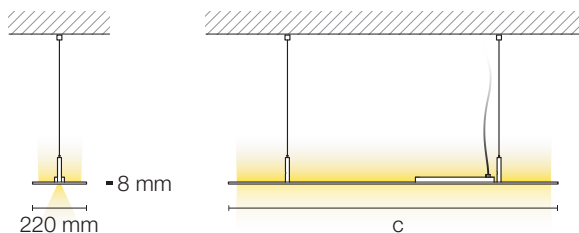

SILVY
SUSPENDED





SILVY

INDIRECT LIGHT

SUSPENDED



EN

- > Ultra low-profile design (only 8 mm) luminaire with indirect light distribution.
- > Suspended luminaire with stainless steel suspension with integrated tool-less height adjustment.
- > Three sizes available for the circular version and two for the oval shaped version.
- > Epoxy-polyester powder coated aluminium body.

FR

- > Luminaire extrêmement plate (8 mm seulement) à émission indirecte du flux lumineux.
- > Application suspendue par câbles en acier inoxydable avec réglage en hauteur sans outil.
- > Trois dimensions disponibles dans la version circulaire et deux dans la version ovale.
- > Corps en aluminium avec revêtement époxy-polyester.

QUICK INFO

GENERAL

Suspended
IP30
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 99 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L70/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

SILVY OVAL SUSPENDED - INDIRECT LIGHT


OPAL DIFFUSER

a x b (mm)	Output (lm)	System (W)	MATT WHITE	MATT BLACK
3000 K				
650x1500	4356	67	33.06.40.001341	33.06.40.001342
900x1900	5227	80	33.06.40.001343	33.06.40.001344
4000 K				
650x1500	4570	67	33.06.40.001351	33.06.40.001352
900x1900	5485	80	33.06.40.001353	33.06.40.001354

COMPONENTS

SUSPENSION SYSTEM

S1



4 pcs
4 Points Suspension +
Recessed Ceiling Cup

S2



4 pcs
4 Points Suspension +
Surface Ceiling Cup

ON/OFF	1 m	3 m	5 m
S1 - White Ø80 mm	35.06.40.003015	35.06.40.003017	35.06.40.003019
S2 - White Ø350x50 mm	35.06.40.003016	35.06.40.003018	35.06.40.003020

OPTIONS

LED

2700 K, 5000 K

ELECTRICAL SYSTEM

DALI, DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM



Bluetooth

FINISHING

Other Colours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

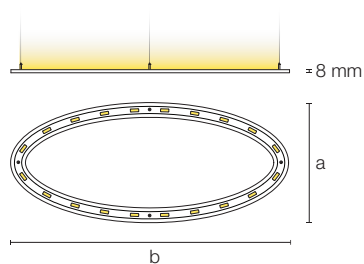

QUICK INFO

GENERAL

Suspended
IP30
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 99 lm/W
3000 K, 4000 K
CRI >80
Lifetime 50 000 H
L70/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K, 5000 K

ELECTRICAL SYSTEM

DALI, DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

Other Colours

SENSORS

Motion
Ambient Light
Motion & Ambient Light

SILVY ROUND SUSPENDED - INDIRECT LIGHT


OPAL DIFFUSER

Ø (mm)	Output (lm)	System (W)	MATT WHITE	MATT BLACK
3000 K				
440	1186	20	33.06.40.001335	33.06.40.001336
600	1780	30	33.06.40.001337	33.06.40.001338
900	3917	67	33.06.40.001339	33.06.40.001340
4000 K				
440	1246	20	33.06.40.001345	33.06.40.001346
600	1868	30	33.06.40.001347	33.06.40.001348
900	4109	67	33.06.40.001349	33.06.40.001350

COMPONENTS

SUSPENSION SYSTEM

S1



3 pcs
3 Points Suspension +
Recessed Ceiling Cup

S2



3 pcs
3 Points Suspension +
Surface Ceiling Cup

S3




1 Point Suspension +
Surface Ceiling Cup

ON/OFF	1m	3m	5m
S1 - White Ø80 mm	35.06.40.001634	35.06.40.002263	35.06.40.002266
S2 - White Ø350x50 mm	35.06.40.002271	35.06.40.002274	35.06.40.002277
S3 - White Ø350x50 mm	35.06.40.002272	35.06.40.002275	35.06.40.002278

SILVY 440



≈ 8 mm




ø440 mm

SILVY 600



≈ 8 mm




ø600 mm

SILVY 900




≈ 8 mm



ø900 mm

Opal Diffuser





> **SILVY ROUND 900** SUSPENDED S3

DOURO AP-5

WALL





DOURO AP-5 WALL

Design by Siza Vieira



EN

- > Wall mounted luminaire with upwards light output.
- > Two planes indirect light emission.
- > Suitable to create relaxed and warm atmospheres in hotels, restaurants and indoor walkthrough areas.
- > Built-in power supply.
- > Matt white aluminium body.

FR

- > Applique murale à émission indirecte.
- > Flux lumineux indirecte en deux niveaux.
- > Idéal pour créer une ambiance détendue et accueillant en hôtels, restaurants et zones de passage en intérieur.
- > Source d'alimentation intégrée.
- > Corps en aluminium finition en blanc mat.

QUICK INFO

GENERAL

Wall
IP40
960°C
Class II
Ta= -20°C +35°C

OPTIC

Opal Glass

LED

Efficacy up to 150 lm/W
3000 K
CRI >80
Lifetime 50 000 H
L70/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF

FINISHING

RAL 9003 Matt White

OPTIONS

LED

2700 K, 5000 K, 6500 K
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours



SENSORS

Motion
Ambient Light
Motion & Ambient Light

DOURO AP-5 WALL

OPAL GLASS

Output (lm)	System (W)	MATT WHITE
3000 K		
3035	31	33.06.20.000031

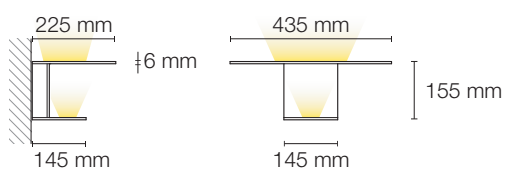

DOURO AP-7 WALL

Design by Siza Vieira



EN

- > Wall mounted luminaire with indirect light emission.
- > Suitable to create relaxed and warm atmospheres in hotels, restaurants and indoor walkthrough areas.
- > Included power supply.
- > Matt white aluminium body.

FR

- > Applique murale à émission indirecte du flux lumineux.
- > Idéal pour créer une ambiance détendue et accueillant en hôtels, restaurants et zones de passage en intérieur.
- > Source d'alimentation intégrée.
- > Corps en aluminium finition en blanc mat.

QUICK INFO

GENERAL

Wall
IP40
960°C
Class II
Ta= -20°C +35°C

OPTIC

Opal Glass

LED

Efficacy up to 139 lm/W
3000 K
CRI >80
Lifetime 50 000 H
L70/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF

FINISHING

RAL 9003 Matt White

OPTIONS

LED

2700 K, 5000 K, 6500 K
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours



SENSORS

Motion
Ambient Light
Motion & Ambient Light

DOURO AP-7 WALL

OPAL GLASS

Output (lm)	System (W)	MATT WHITE
3000 K		
1483	16	33.06.20.000033

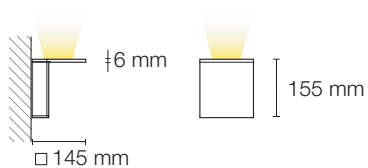

DOURO MC

TABLE LAMP

Design by Siza Vieira



EN

- > Direct light emission table lamp.
- > Unique style lamp with an inspiring, efficient and comfortable light.
- > Included plug-in Driver with feed cable.
- > Luminaire base is provided with anti-scratch rubber feet.
- > Matt white aluminium body.

FR

- > Lampe de table avec éclairage direct.
- > Lampe qui se démarque par un style unique grâce à une lumière inspirante, efficace et confortable.
- > Driver mural et câble d'alimentation inclus.
- > La base de l'appareil est équipée de petits pieds en caoutchouc anti-rayures.
- > Corps en aluminium finition en blanc mat.

QUICK INFO

GENERAL

Table Lamp
IP40
850°C
Class II
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 95 lm/W
3000 K
CRI >85
Lifetime 50 000 H
L70/B10 @TC=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF

FINISHING

RAL 9003 Matt White

OPTIONS

LED

2700 K, 4000 K, 5000 K

CONTROL SYSTEM

Bluetooth



FINISHING

 Other Colours

DOURO MC TABLE LAMP

OPAL GLASS

Output (lm)	System (W)	MATT WHITE
3000 K		
434	6	33.06.50.000044

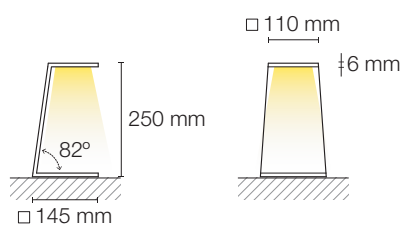

DOURO PA-2

FLOOR

Design by Siza Vieira

EN

- > Floor standing lamp with light output directed upwards and downwards.
- > Light distribution: 50% direct and 50% indirect.
- > Floor switch included.
- > Matt white aluminium body.

FR

- > Lampe sur pied avec éclairage direct et indirect.
- > Répartition du flux lumineux: 50% en émission directe et 50% en émission indirecte.
- > Interrupteur à pied inclus.
- > Corps en aluminium finition en blanc mat.



QUICK INFO

GENERAL

Floor
IP40
850°C
Class II
Ta= -20°C +35°C

OPTIC

Indirect Light - Opal Glass
Direct Light - Opal Polycarbonate

LED

Efficacy up to 139 lm/W
3000 K
CRI >80
Lifetime 50 000 H
L70/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF

FINISHING

RAL 9003 Matt White

OPTIONS

LED

2700 K, 4000 K, 5000 K

CONTROL SYSTEM

Bluetooth



FINISHING

Other Colours

DOURO PA-2 FLOOR

OPAL GLASS

Output (lm)	System (W)	MATT WHITE
3000 K		
2695	31	33.06.10.000020

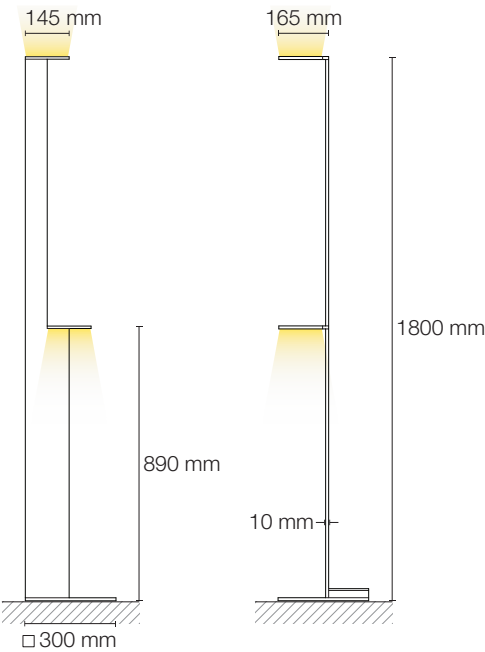

A313
WALL





> A313 WALL

A313 DIRECT & INDIRECT LIGHT WALL




EN

- > Homogeneous wall illumination through uniform direct/indirect light distribution.
- > Light distribution: 50% direct and 50% indirect.
- > Available in two standard lengths or customized from 400 mm to 3000 mm.
- > Steerable front plate, adjustable in three different positions allowing light beam direction adjustment.
- > Epoxy-polyester powder coated aluminium body.

FR

- > Éclairage homogène du mur grâce à une répartition uniforme de la lumière directe/indirecte.
- > Répartition du flux lumineux: 50% en émission directe et 50% en émission indirecte.
- > Disponible en deux longueurs standard ou sur mesure de 400 mm jusqu'à 3000 mm.
- > Face orientable sur trois positions, ce qui permet de régler la direction du faisceau de lumière.
- > Corps en aluminium avec revêtement époxy-polyester.

ROTATION

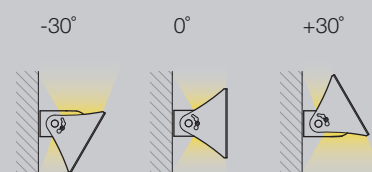

QUICK INFO

GENERAL

Wall
IP30
650°C
Class I
Ta= -20°C +35°C

OPTIC

Opal PMMA

LED

Efficacy up to 173 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @TC=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White

A313 WALL - DIRECT & INDIRECT LIGHT

OPAL DIFFUSER

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
1282	2586	27	33.41.50.000023	33.41.50.000025
1563	3237	33	33.41.50.000024	33.41.50.000026
4000 K				
1282	2706	27	33.41.50.000027	33.41.50.000029
1563	3386	33	33.41.50.000028	33.41.50.000030

> Fluorescent lamp versions also available – product data at www.climarlighting.com – or by direct request to the factory.

OPTIONS

EMERGENCY (EM) - SELF-TEST INTEGRATED

ON/OFF	COD
EM 1H 3W	35.00.003.01.23
DALI	COD
EM 1H 5,4W DALI	35.00.004.01.54

> On request – External Emergency. Box dimensions: 45x120x360 mm.



OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING



 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion

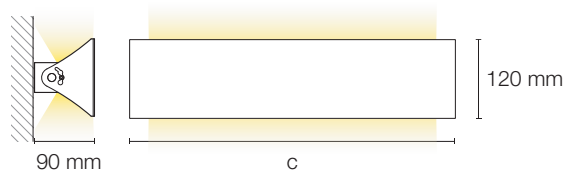

BERKA WALL






> BERKA WALL

BERKA

INDIRECT LIGHT

WALL

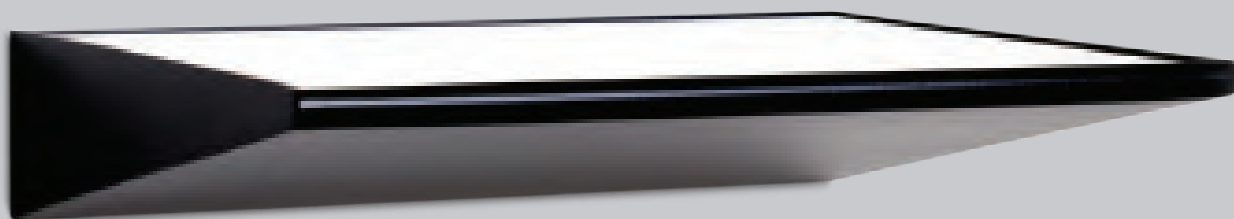

EN

- > Wall mounted luminaire with indirect light output.
- > Homogeneous wall illumination through uniform light emission.
- > Opal Polycarbonate dust protection cover.
- > Epoxy-polyester powder coated aluminium body.

FR

- > Applique murale à émission indirect du flux lumineux.
- > Éclairage homogène du mur grâce à une sortie de lumière uniformément éclairée.
- > Diffuseur de protection en Polycarbonate Opale.
- > Corps en aluminium avec revêtement époxy-polyester.

QUICK INFO

GENERAL

Wall
IP30
850°C
Class I
Ta= -20°C +35°C

OPTIC

Opal Polycarbonate

LED

Efficacy up to 181 lm/W
3000 K, 4000 K
CRI >80
Lifetime 72 000 H
L80/B10 @TC=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF, DALI

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

BERKA WALL - INDIRECT LIGHT

OPAL DIFFUSER

MATT WHITE FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
310	2145	20	33.06.20.000153	–
590	4275	40	33.06.20.000154	33.06.20.000155
4000 K				
310	2250	20	33.06.20.000156	–
590	4485	40	33.06.20.000157	33.06.20.000158

MATT BLACK FINISHING

c (mm)	Output (lm)	System (W)	ON/OFF	DALI
3000 K				
310	2145	20	33.06.20.000159	–
590	4275	40	33.06.20.000160	33.06.20.000161
4000 K				
310	2250	20	33.06.20.000162	–
590	4485	40	33.06.20.000163	33.06.20.000164

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING



 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion




STRETTO
WALL





STRETTO

INDIRECT LIGHT
WALL

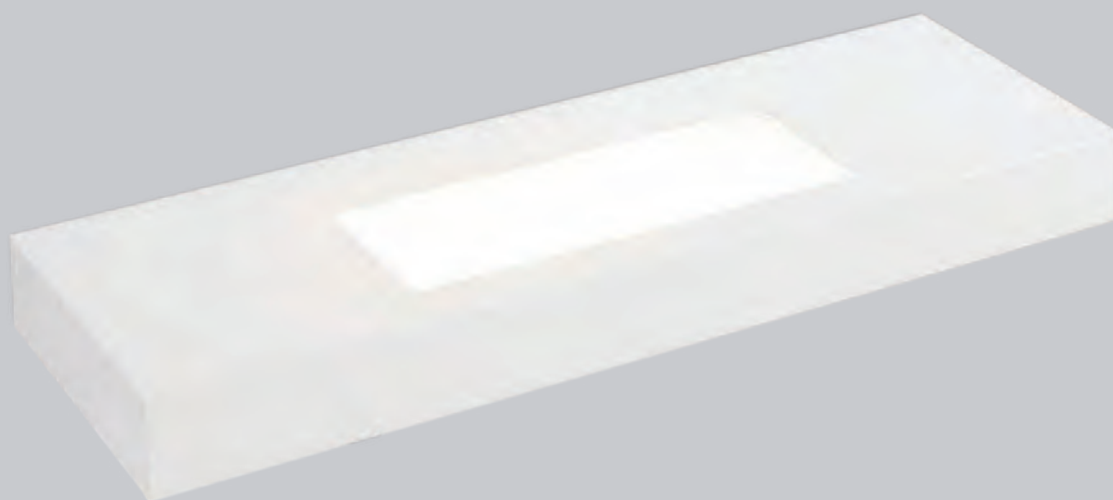

EN

- > Wall mounted luminaire with indirect light output.
- > Homogeneous wall illumination through uniform light emission.
- > Polycarbonate dust protection cover.
- > Epoxy-polyester powder coated aluminium body.

FR

- > Applique murale à émission indirect du flux lumineux.
- > Éclairage homogène du mur grâce à une sortie de lumière uniformément éclairée.
- > Diffuseur de protection en Polycarbonate.
- > Corps en aluminium avec revêtement époxy-polyester.

QUICK INFO

GENERAL

Wall
IP40
IK05
850°C
Class I
Ta= -20°C +35°C

OPTIC

Clear Polycarbonate

LED

Efficacy up to 95 lm/W
3000 K
CRI >80
Lifetime 50 000 H
L70/B10 @Tc=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

OPTIONS

LED

2700 K, 4000 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DALI, DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours



SENSORS

Motion

STRETTO WALL - INDIRECT LIGHT

OPAL DIFFUSER


Output (lm)	System (W)	MATT WHITE	MATT BLACK
3000 K			
336	6,7	33.02.203.04.00	33.02.203.04.01
672	13	33.02.000.04.00	33.02.000.04.01

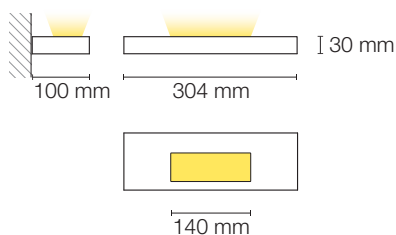

NEXUS

DIRECT & INDIRECT LIGHT

WALL

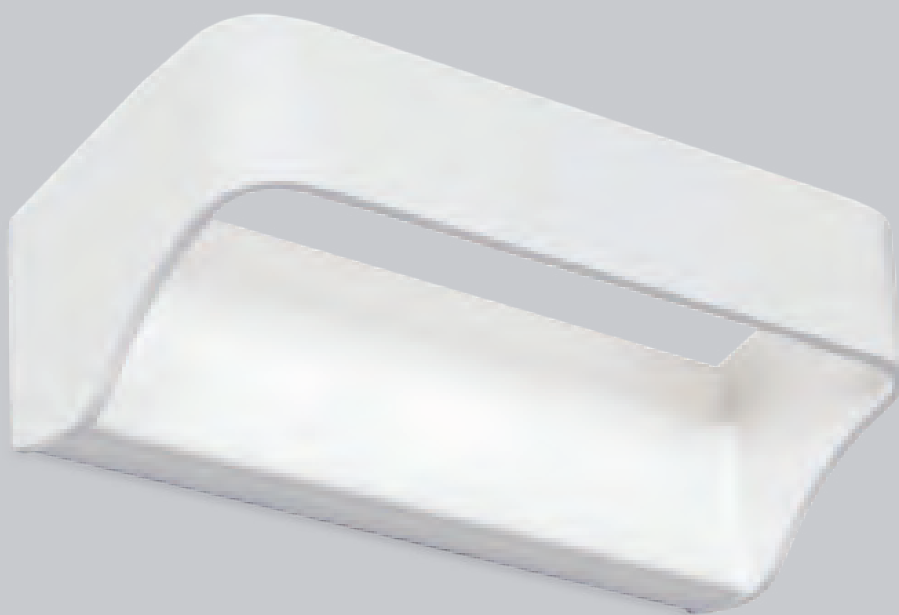

EN

- > Wall mounted luminaire for decorative ambient lighting.
- > Homogeneous wall illumination through uniform direct/indirect light distribution.
- > Epoxy-polyester powder coated aluminium body.

FR

- > Applique murale pour éclairage ambiant décorative.
- > Éclairage homogène du mur grâce à une répartition uniforme de la lumière directe/indirecte.
- > Corps en aluminium avec revêtement époxy-polyester.

QUICK INFO

GENERAL

Wall
IP20
650°C
Class II
Ta= -20°C +35°C

LED

Efficacy up to 95 lm/W
3000 K
CRI >80
Lifetime 50 000 H
L70/B10 @TC=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF

FINISHING

RAL 9003 Matt White

OPTIONS

LED

2700 K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DALI, DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY



1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion

NEXUS WALL - DIRECT & INDIRECT LIGHT


c (mm)	Output (lm)	System (W)	MATT WHITE
3000 K			
150	454	6,7	33.94.007.01.13
260	588	10	33.94.010.01.00



ECLIPSE

WALL



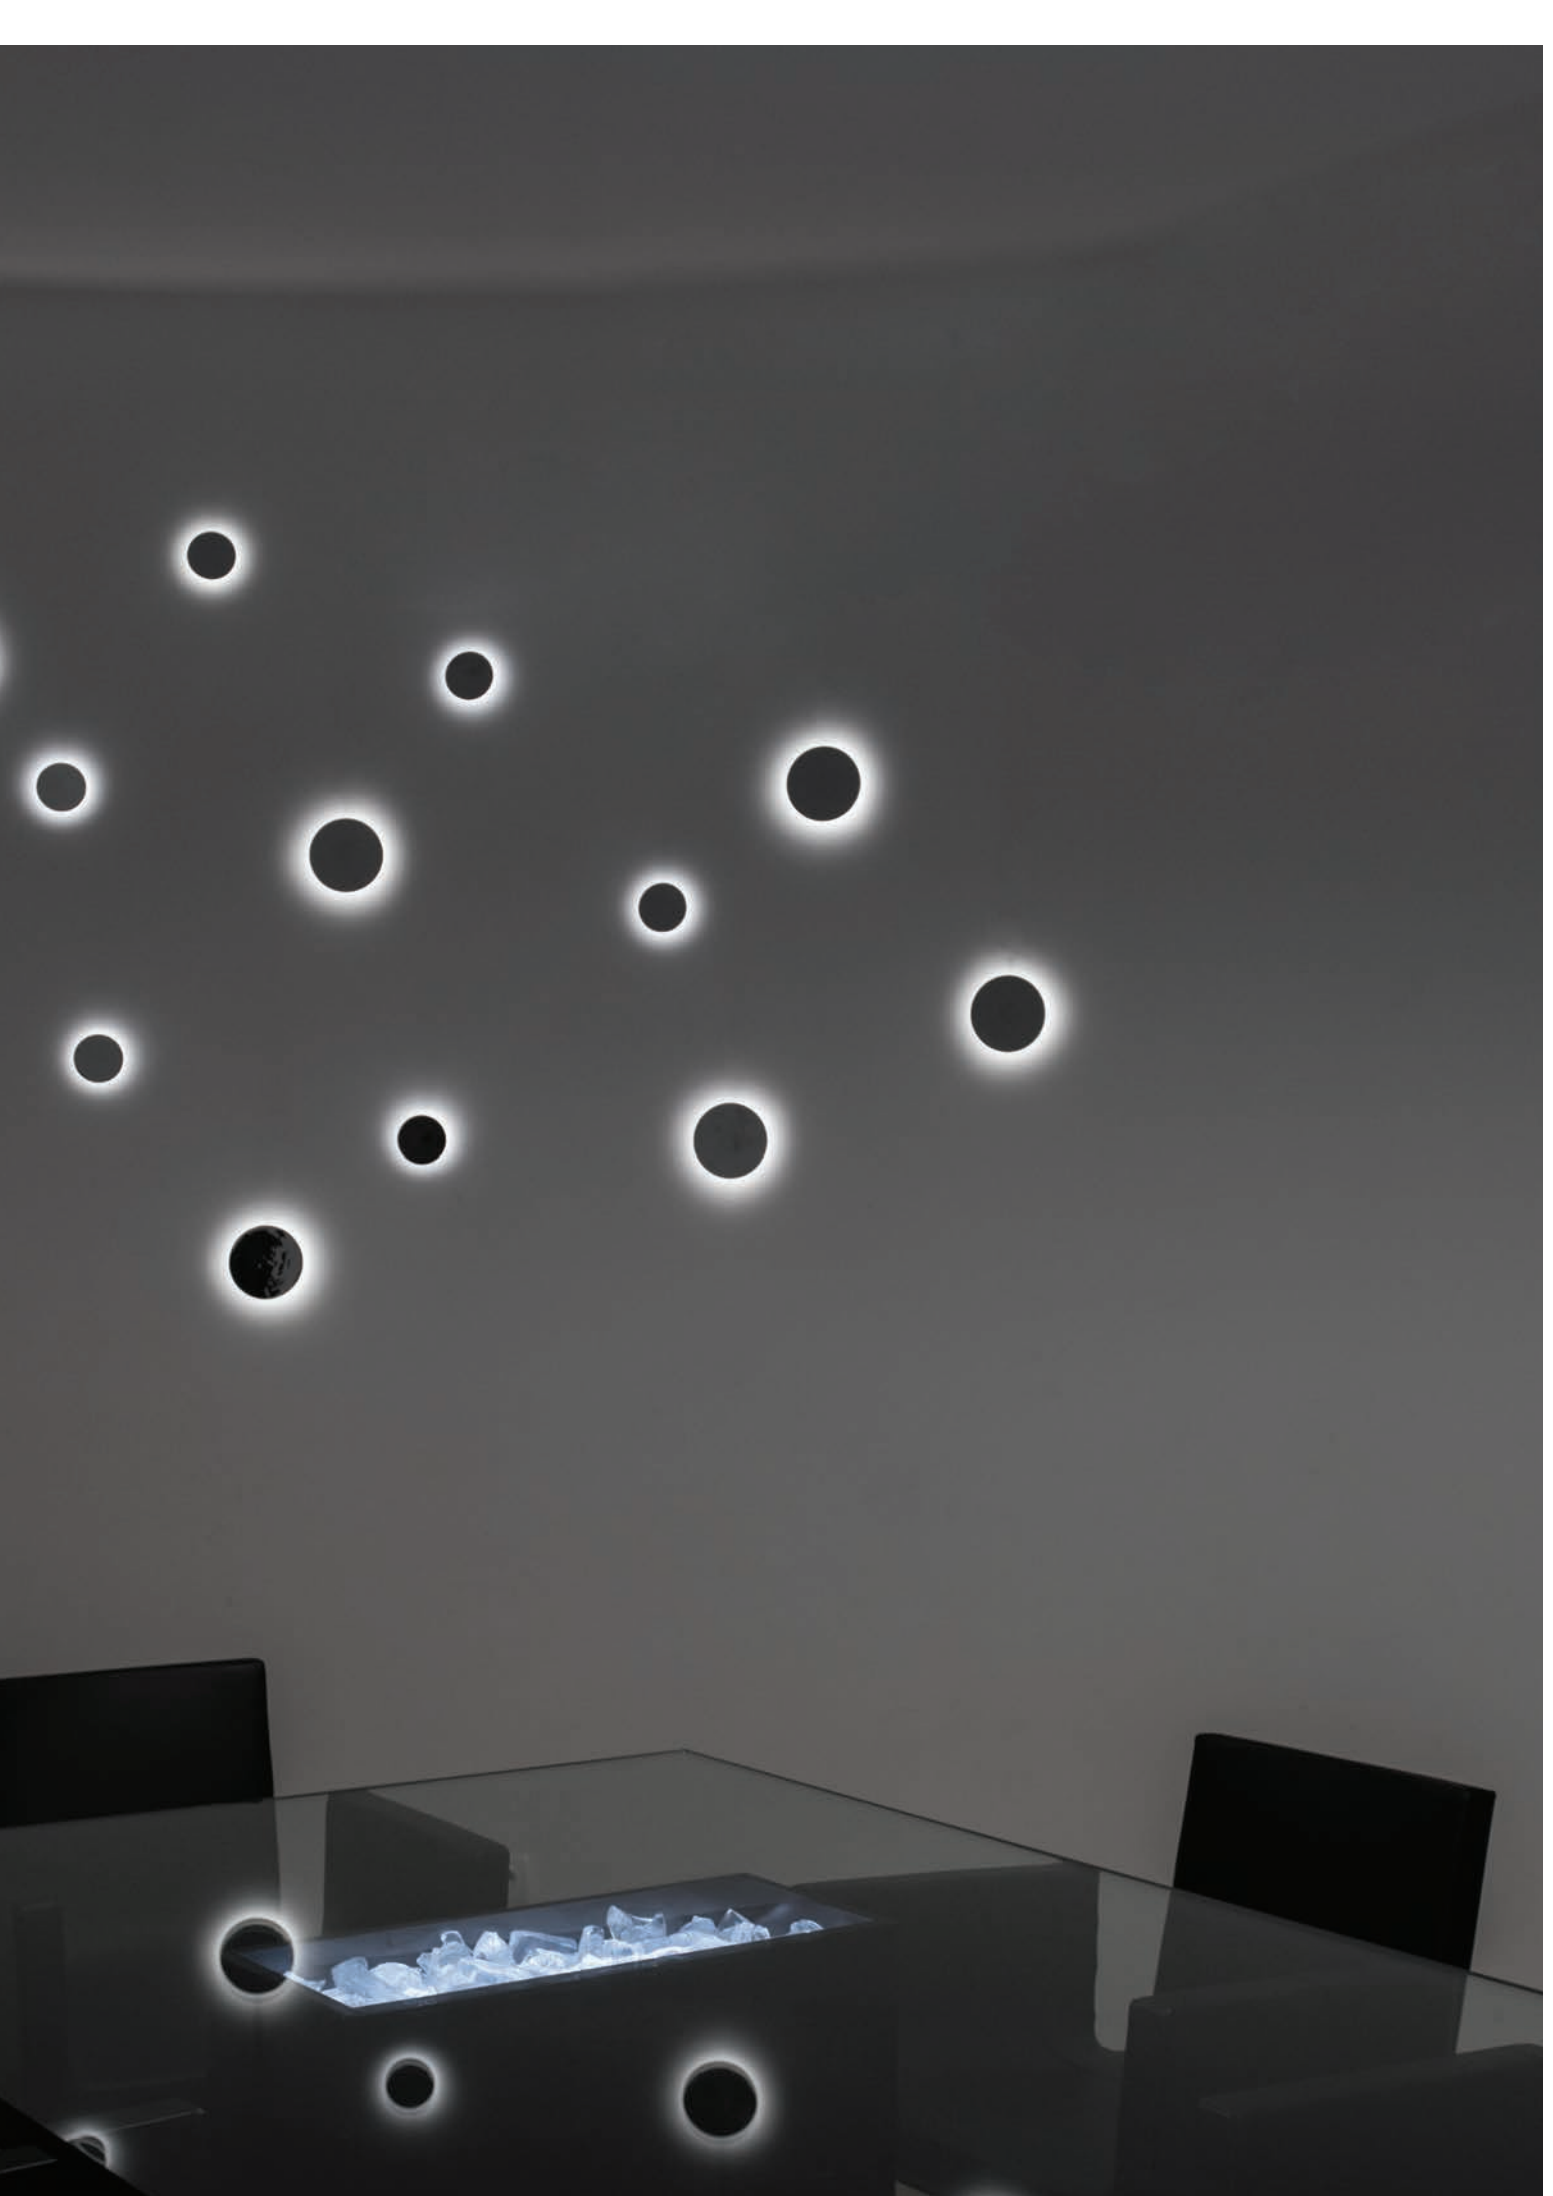

ECLIPSE

INDIRECT LIGHT

WALL



EN

- > Wall mounted luminaire for decorative ambient lighting.
- > For recessed mounting in cavity walls (plasterboard).
- > Subtle design easily integrated into the architecture.
- > Designed to achieve excellent diffusion, without glare and creating a soft ambient light.
- > External class II constant current Driver.
- > Epoxy-polyester powder coated aluminium body.

FR

- > Applique murale pour éclairage ambiant décorative.
- > Pour application encastrée aux murs creux.
- > Dessin subtile qui s'intègre facilement dans l'architecture.
- > Luminaire avec excellente diffusion, sans éblouissement et créant un doux éclairage ambiant.
- > Driver externe à courant constante et classe de protection II.
- > Corps en aluminium avec revêtement époxy-polyester.

QUICK INFO

GENERAL

Wall
IP40 (Optic)
IP20
850°C
Class III
Ta= -20°C +35°C

OPTIC

Clear PMMA

LED

Efficacy up to 129 lm/W
3000 K
CRI >80
Lifetime 50 000 H
L80/B10 @TC=65°C
350 mA

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black

ECLIPSE WALL - INDIRECT LIGHT
CLEAR DIFFUSER

Ø (mm)	Output (lm)	LED Power (W)	MATT WHITE	MATT BLACK
3000 K				
80	31	1,2	33.06.20.000007	33.06.20.000008
120	49	3,5	33.06.20.005000	33.06.20.005001

COMPONENTS

DRIVER - EXTERNAL



CLASS II

ON/OFF

Power Supply 1-5W IP20

DIMENSION

22x32x76 mm

COD

35.92.00.000023

Power Supply 7-13W IP20

23x38x125 mm

35.06.20.007005

> External Driver to be housed nearby.

OPTIONS

LED

2700 K, 4000K, 5000 K, 6500 K
Tunable White, RGB, RGBW
CRI >90

ELECTRICAL SYSTEM

DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

Other Colours

EMERGENCY


1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS



Motion



ECLIPSE 80



ECLIPSE 120



BACO
WALL





> BACO IP44 WALL

BACO

DIRECT & INDIRECT LIGHT

WALL



EN

- > Homogeneous wall illumination through uniform direct/indirect light distribution.
- > Light distribution: 50% direct and 50% indirect.
- > IP44 versions with Opal PMMA protection cover.
- > Polyester powder coated aluminium body.

FR

- > Éclairage homogène du mur grâce à une répartition uniforme de la lumière directe/indirecte.
- > Répartition du flux lumineux: 50% en émission directe et 50% en émission indirecte.
- > Versions IP44 avec diffuseur de protection en PMMA Opale.
- > Corps en aluminium avec revêtement en polyester.

QUICK INFO

GENERAL

Wall
 960°C (IP20)
 650°C, IK07 (IP44)
 Class I
 Ta= -20°C +35°C

OPTIC

PMMA Opal (IP44)

LAMP - NOT INCLUDED

G9
 E27

ELECTRICAL SYSTEM

230V/50Hz
 ON/OFF

FINISHING

RAL 9003 Matt White
 RAL 9005 Matt Black

BACO WALL - DIRECT & INDIRECT LIGHT

OPAL DIFFUSER

WITHOUT DIFFUSER

a x b x h (mm)	Type	LAMP Power (W)	MATT WHITE	MATT BLACK
IP20				
90x90x90	G9	max. 40	33.34.040.01.02	33.34.040.01.04
120x120x120	G9	max. 60	33.34.060.01.03	33.34.060.01.09
200x200x200	E27	max. 75	33.34.075.01.04	33.34.075.01.16

> Lamp not included.

WITH DIFFUSER

a x b x h (mm)	Type	LAMP Power (W)	MATT WHITE	MATT BLACK
IP44				
100x100x100	G9	max. 25	33.34.025.01.02	33.34.025.01.01
150x150x150	G9	max. 40	33.34.040.01.08	33.34.040.01.07

> Lamp not included.

OPTIONS

CONTROL SYSTEM

Bluetooth

FINISHING


 Other Colours

SENSORS



Motion



BACO IP20



BACO IP44

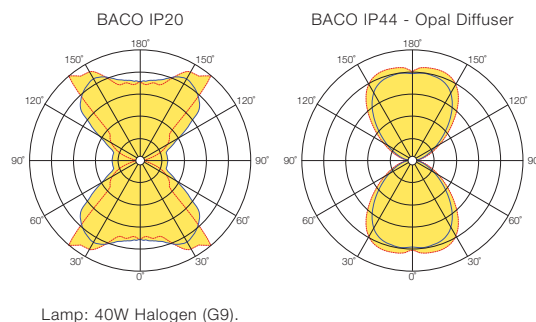

ODL-010 PA WALL





ODL-010 PA DIRECT LIGHT WALL



EN

- > Wall mounted luminaire with direct light output.
- > IP44 protection luminaire suitable for indoor and outdoor applications.
- > Lens with 25° opening angle.
- > Polyester powder coated aluminium body.

FR

- > Applique murale à émission direct du flux lumineux.
- > Indice de protection IP44 conseillé pour l'application en intérieur et extérieur.
- > Lentille à l'angle d'ouverture de 25°.
- > Corps en aluminium avec revêtement en polyester.

QUICK INFO

GENERAL

Wall
IP44
IK07
750°C
Class II
Ta= -20°C +35°C

LED

Efficacy up to 125 lm/W
3000 K, 5000 K
CRI >80
Lifetime 50 000 H
L80/B10 @TC=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black
Textured Grey

OPTIONS

LED

2700 K, 4000 K, 6500 K
CRI >90

ELECTRICAL SYSTEM

DALI, DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING

 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion

ODL-010 PA WALL - DIRECT LIGHT

MATT WHITE FINISHING




Output (lm)	System (W)	ON/OFF
3000 K		
196	2,8	33.94.003.08.26
5000 K		
242	2,8	33.94.003.08.30

MATT BLACK FINISHING

Output (lm)	System (W)	ON/OFF
3000 K		
196	2,8	33.94.003.08.27
5000 K		
242	2,8	33.94.003.08.31

TEXTURED GREY FINISHING

Output (lm)	System (W)	ON/OFF
3000 K		
196	2,8	33.94.003.08.24
5000 K		
242	2,8	33.94.003.08.28

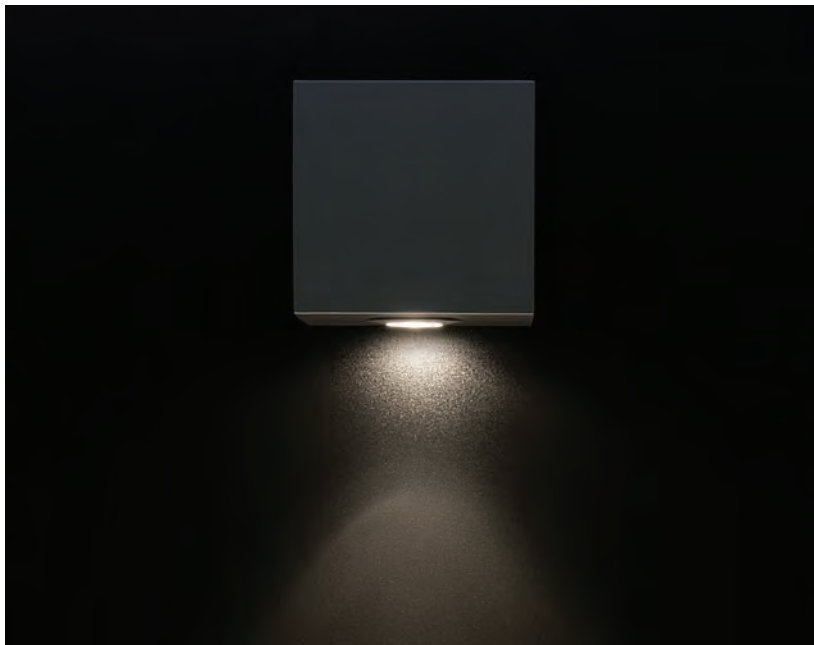

ODL-015 PA DIRECT & INDIRECT LIGHT WALL



EN

- > Wall mounted luminaire direct-indirect light output.
- > Light distribution: 50% direct and 50% indirect.
- > IP44 protection luminaire suitable for indoor and outdoor applications.
- > Lens with 25° opening angle.
- > Polyester powder coated aluminium body.

FR

- > Applique murale à émission directe-indirecte du flux lumineux.
- > Répartition du flux lumineux: 50% en émission directe et 50% en émission indirecte.
- > Indice de protection IP44 conseillé pour l'application en intérieur et extérieur.
- > Lentille à l'angle d'ouverture de 25°.
- > Corps en aluminium avec revêtement en polyester.

QUICK INFO

GENERAL

Wall
IP44
IK07
750°C
Class II
Ta= -20°C +35°C

LED

Efficacy up to 125 lm/W
3000 K, 5000 K
CRI >80
Lifetime 50 000 H
L80/B10 @TC=65°C

ELECTRICAL SYSTEM

230V/50Hz
ON/OFF
Direct / Indirect - Simultaneous Control

FINISHING

RAL 9003 Matt White
RAL 9005 Matt Black
Textured Grey

OPTIONS

LED

2700 K, 4000 K, 6500 K
CRI >90

ELECTRICAL SYSTEM

DALI, DSI, DIM 1-10V, Phase-cut

CONTROL SYSTEM

Bluetooth

FINISHING


 Other Colours

EMERGENCY

1 Hour, 3 Hours
DALI 1 Hour, 3 Hours

SENSORS

Motion



ODL-015 PA WALL - DIRECT & INDIRECT LIGHT

MATT WHITE FINISHING


Output (lm)	System (W)	ON/OFF
3000 K		
392	5,6	33.94.006.08.15
5000 K		
484	5,6	33.94.006.08.19

MATT BLACK FINISHING

Output (lm)	System (W)	ON/OFF
3000 K		
392	5,6	33.94.006.08.16
5000 K		
484	5,6	33.94.006.08.20

TEXTURED GREY FINISHING

Output (lm)	System (W)	ON/OFF
3000 K		
392	5,6	33.94.006.08.13
5000 K		
484	5,6	33.94.006.08.17



The interaction
in a human-light
relationship
is settled by the
attraction of colours,
touches, and the
individual feeling
that **light** gives
in its presence.

EN / FR

Cofinanciado por:



climarlighting.com